



### Features:

- Meets EIA310c & IEC-3 specifications
- Built-in keyboard, touchpad and monitor with high brightness 17" or 19" LCD Panel
- Multiple Language Keyboard available
- Up to 16 ports switch with remote console option
- Compatible with wintel and Sun systems
- Support both USB and/or PS/2 interfaces



105-Key keyboard with  
2-button touchpad



117-Key SUN keyboard  
with 3-button touchpad



D-Sub 15 pin  
16 ports with console



Self-locking rails

### Introduction:

The integration of data, video and voice communication in computers and the subsequent technological advances have spawn many sophisticated CTI applications that have become accessible and affordable to the small and mid-sized business. The increasing CTI applications coupled with the growing demand for corresponding hardware and systems have created a dilemma: How does one pack the growing number of equipment into existing space?

ITechLCD's 1U slim industrial monitor keyboard, the BHK, is the solution for compacting more computing power into limited space. This revolutionary monitor keyboard combines a spectacular display coupled with a keyboard with built-in pointing device in a compact unit that measures only 1U in height. Occupying a fraction of the space of traditional monitor and keyboard units, the installation of the BHK leaves ample space for other critical components. With built-in analog-to-digital conversion board, the BHK can be connected to any standard VGA graphics card for immediate On Screen Display. The monitor key-board unit has a built-in slide rail and mounts easily onto any 19" rackmount cabinet.




CAT 5 Console Port



Over IP Console Port



Rear View of 1 / 8 / 16 KVM Ports

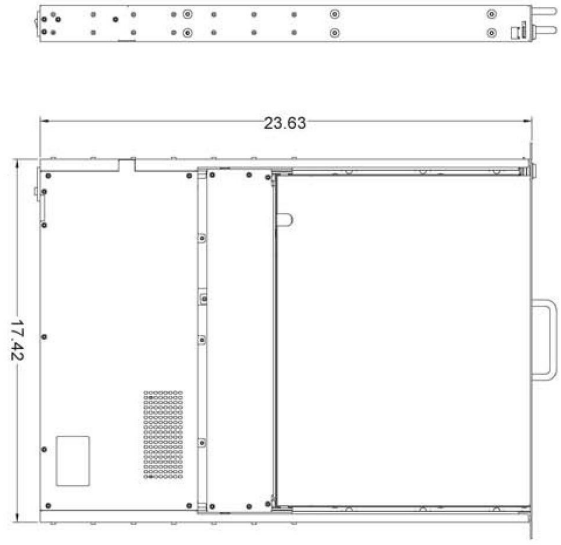

## Display

Refresh Rate	60Hz
Display Color	16.2M colors
Contrast Ratio	500:1

## Specifications

Model	BHK117e /8e /16e
KVM Ports	1 / 8 /16 x D-Sub 15 pins KVM ports
Construction	Heavy-Duty Steel
Keyboard	105-Key Cherry Keyboard with 2-button touchpad
LCD Size / Resolution	17" / 1280x1024
Brightness	300 nits
Backlight MTBF	50K Hrs
Keyboard / Mouse Interface	PS2 or Combo PS2 & USB
Dimension/Weight	17.42"W x 1.75"H x 23.63"D / 31 LBs
Power Supply	60W, 100-240VAC, 50/60Hz
Compliance	CE, FCC, RoHS
Operating Temperature	0-50C (32-122F)