

Full IP65 19" Panel PC Stainless Steel LCD Display

FEATURES:

- Fanless
- Intel® socket P Core™ 2 Duo processor with FSB 667/800/1066 MHz, default T7450 1.6GHz. Option P8400 2.26GHz.
- 1 x 204-pin DDR3 1066/800 MHz SO-DIMM socket, default 2GB/800 MHz.
- DC 11~32V wide-ranging power input
- Total NEMA 4/IP 65 compliant
- Optional sealed 5-Wire resistive touch screen or GFG resistive touch screen



Model: APC1900C2DHB91-SIP



SPECIFICATION:

SYSTEM	
Processor	Intel® socket P Core™ 2 Duo processor with FSB 667/800/1066 MHz, default T7450 1.6GHz. Option P8400 2.26GHz.
System Memory	1 x 204-pin DDR3 1066/800 MHz SO-DIMM socket, default 2GB/800 MHz.
System Chipset	Intel® GM45+ ICH9M
Outside I/O port	Standard I/O: • 2 x USB ports • 1 x RJ-45 GbE LAN • 2 x DB-9 RS-232 (COM 1-2) connector • 1 x DC power input Full Function I/O Ports: • 1 x VGA DB-15 port • 1 x Audio, Line-out
Storage	1 x 2.5" 320GHz SATA HDD industrial grade(default) 1 x CF SLC 200X (internal) 1 x 2.5" SATA SSD SLC wide range
Expansion Slots	None
OS Support	Windows® XP Pro, XP Embedded, Windows® 7
LCD	
Display Type	19" TFT-LCD
Max. Resolution	1280x1024
Max. Color	16.2M
Brightness	1000
View Angle	H:160° / V :160°
Backlight Lifetime	50,000hrs


TOUCHSCREEN (option)	
Type	Analog resistive
Light Transmission	80%
POWER SUPPLY	
Power Input	DC 11~32V
MECHANICAL	
Construction	Stainless steel front bezel and aluminum extrusion back cover
IP Rating	Total IP 65
Mounting	VESA 100x100 mount
Dimension	470(W)x388.6(H)x71.2(D)mm
Net Weight	11.2 kgs
ENVIRONMENTAL	
Operating Temperature	0~50 OC
Storage Temperature	-20~60 OC
Storage Humidity	10~90% @40 C, non-condensing
Certificate	Meet CE/FCC Class A



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

DIMENSION:

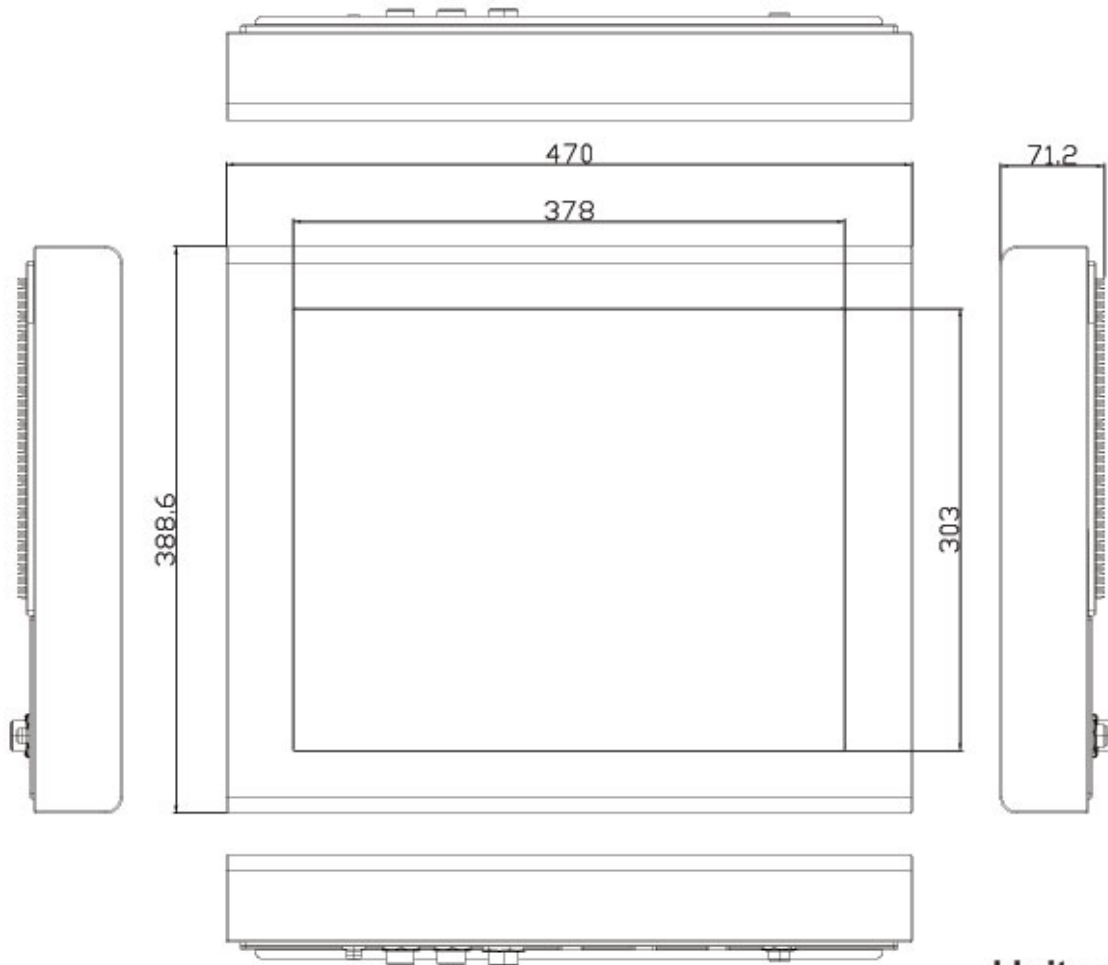

Unit : mm

