

High Speed Panel PC with Touchscreen

8.4" Open Frame Panel PC w/Touch, HS-2622/EDEN1.0Ghz, 84W Adapter , 1GB RAM, 2.5" 80GB HDD



(Model: BLOC08400VA)

Features:

- Aluminum front panel design
- 8.4" TFT color panel display
- Built-in touch screen, HS-2622+VIA V4 Eden 1GHz CPU, 12V DC adapter
- Onboard graphics, dual ethernet, audio controller
- 1 x 2.5" HDD space
- 1 x 4cm ball bearing cooling fan
- BLPC08400VA provides CF, 2 x COM, 4 x USB2.0
- Option for Wireless LAN module, open frame type

Display


LCD Size: 8.4"
Max Resolution: 800 x 600 pixels
Brightness (cd/m²): 250 cd/m²(Typ.)
Contrast Ratio: 600:1
LCD Color: 26.2K colors
Pixel Pitch (mm): 0.213 x 0.213
Touch Screen: 8.4" resistive

System

SBC Model: HS-2622
CPU: VIA V4 Eden 1GHz CPU
BIOS: Award BIOS with 4Mb Flash EEPROM
System Chipset: VIA CX700(M)
System Memory: 1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM
Display Chipset: VIA CX700(M)
Audio Chipset: RealTek ALC883 7.1+2CH audio codec
Ethernet Chipset: Dual VIA VT6106S 10/100 Mbps LAN
Provides Wireless LAN Module (option)
Drive Bay: 1 x 2.5" HDD space
Storage: 1 x Type II CF socket
Watchdog Timer: Reset: 1 sec.-255 min. and 1 sec. or 1 min./step
Thermal Solutions: 1 x 4cm ball bearing cooling fan
Dimensions (LxHxW): 27.0 x 21.0 x 8.7 cm
Cut Out Size (LxH): 23.4 x 17.4 cm
Operation/Storage Temperature: 0~+45 degrees C/-20~+70 degrees C
EMC: FCC/CE
Front Panel Protection: IP65 compliance
Power Adapter: 12V DC in 84W adapter

I/O Interface

External I/O: PS/2 KB/MS, MIC In, Line In, Line Out, 2 x COM, VGA, 2 x LAN, 4 x USB2.0, CF
Rear I/O:

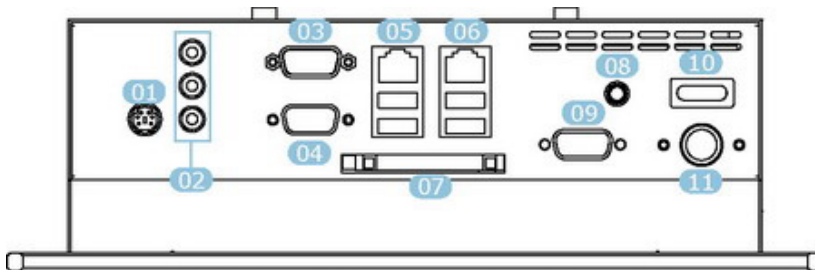

01. KB/MS	05. LAN + USB2.0 * 2	09. COM 2 (RS-422/485 option)
02. Audio	06. LAN + USB2.0 * 2	10. Main Power ON/OFF
03. COM 1	07. CF	11. DC Adapter In
04. VGA	08. WLAN ANT	

Accessories Options

Table Top Metal Stand, Memory Module, Wireless LAN Module, 2.5" HDD

Photos



Mechanical Drawings

