


6.4" Small Size Panel PC with Touch Screen, MainBoard, CF, Dimmer Controller, +10~+30V DC In



**BSPC0640VT-F9**

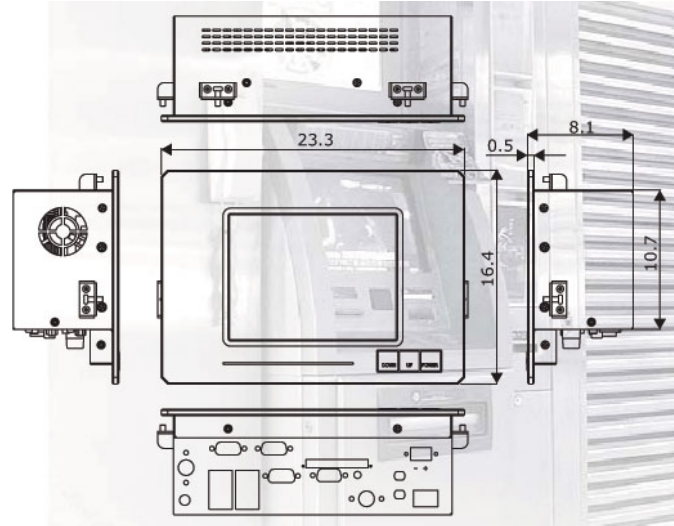

## Features

- Aluminum front panel design
- 6.4" high brightness TFT color panel display
- Built-in touch screen, HS-2610(M), dimmer controller
- Provides Intel P-M/C-M/ULV C-M processor
- Onboard graphics, ethernet, audio controller
- 1 x 2.5" HDD space
- 1 x 4cm ball bearing cooling fan
- +10~+30V DC power in or option AC adapter
- Provides CF, 3 x COM, 4 x USB2.0
- Option for Wireless LAN module

## Display

### LCD Size

6.4"

### Max Resolution

640 x 480 pixels

### LCD Color

262,144 colors

### Pixel Pitch (mm)

0.2025 x 0.203

### Touch Screen

6.4" resistive

### Dimmer Controller

3-key dimmer controller on front panel



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)

## System

### SBC Model

HS-2610(M)

### CPU

Intel Pentium M/Celeron M processor 1.3~2.0GHz  
ULV Intel Celeron M processor 600MHz/512K (option)

### BIOS

AMI PnP Flash BIOS

### System Chipset

Intel 852GM(E)/ICH4

### System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR SDRAM

### Display Chipset

Intel 852GM(E)

### Audio Chipset

RealTek ALC202A

### Ethernet Chipset

Intel 82551QM and 82562ET dual 10/100 Mbps LAN  
Provides Wireless LAN module (option)

### Drive Bay

1 x 2.5" HDD space

### Storage

1 x Type II CF socket

### Watchdog Timer

Software programmable time-out intervals from 1~255 sec.  
or 1~255 min.

### Thermal System

1 x 4cm ball bearing cooling fan

### Dimensions (LxHxW)

23.3 x 16.4 x 8.1 cm

### Cut Out Size (LxH)

21.8 x 13.8 cm

### Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

### EMC

FCC/CE

### Front Panel Protection

IP65 compliance

### Power Adapter

+10~+30V DC power in or option AC adapter

## I/O Interface

### External I/O

MIC In, Line Out, PS/2 KB, VGA, 3 x COM, 2 x LAN, 4 x USB2.0, PS/2 MS, CF

### Rear I/O

