


## 7" Small Size Panel PC with VIA Eden 500/667MHz CPU, CF, 42W Adapter



### BSPC0700VT

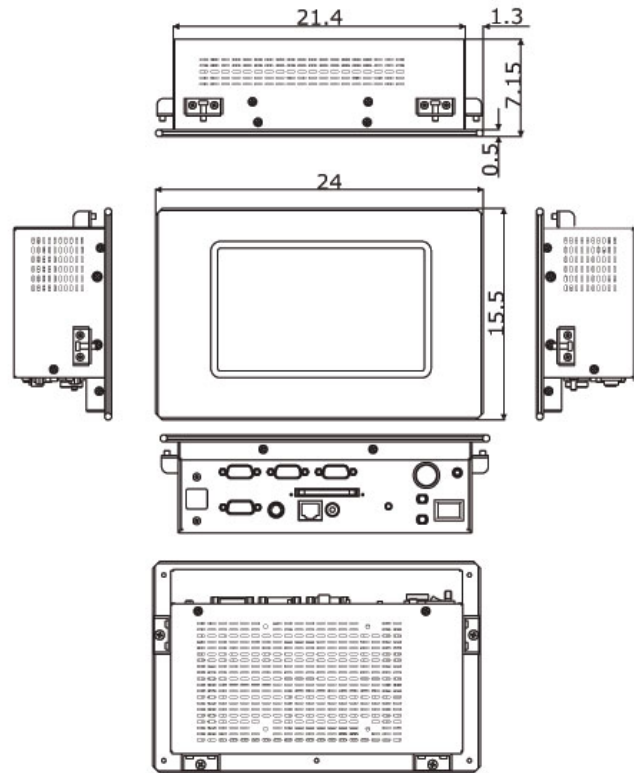

#### Features

- Aluminum front panel, fanless Panel PC design
- 7" high brightness TFT color panel display
- Built-in touch screen, HS-2605, 42W AC-DC adapter
- Provides VIA Eden 500/667MHz CPU (500MHz fanless), open frame
- Onboard graphics, ethernet, audio controller
- 2.5" HDD space x 1
- Provides CF, COM x 3, USB x 2, TV-Out

#### Display

**LCD Size**

7"

**Max Resolution**

800 x 480 pixels

**LCD Color**

262K

**Pixel Pitch (mm)**

0.1905 x 0.1905

**Touch Screen**

7" resistive

#### Mechanical and Environmental

**Front Panel Color**

Black

**Dimensions (LxHxW)**

24.0 x 15.5 x 6.82 cm

**Operation Temperature**

0~+45 degrees C

**Storage Temperature**

-20~+70 degrees C

**EMC**

FCC/CE

**Front Panel Protection**

IP65 compliance

**Power Adapter**

42W AC-DC adapter



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)

## System

### SBC Model

HS-2605

### CPU

VIA Eden 500/667MHz CPU

### BIOS

AMI PnP Flash BIOS

### System Chipset

VIA VT8606/VT82C686B

### System Memory

1 x 144-pin SO-DIMM socket up to 512MB SDRAM

### Display Chipset

VIA VT8606

### Audio Chipset

VIA VT1612A

### Ethernet Chipset

RealTek RTL8100 10/100 Mbps LAN

### Drive Bay

1 x 2.5" HDD space

### Storage

1 x Type I CF socket

### Watchdog Timer


Sets 1/2/10/20/110/220 seconds activity trigger with NMI or Reset

## I/O Interface

### External I/O

MIC In, Line Out, TV-Out, LAN, CF, COM x 3, PS/2 KB/MS, VGAUSB x 2

### Rear I/O

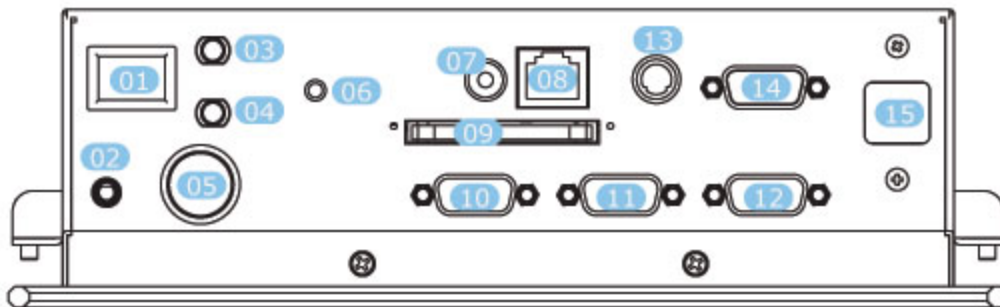

01. ON/OFF	06. Reset Button	11. COM 2
02. Brightness	07. TV-Out	12. COM 3
03. MIC In	08. LAN	13. KB/MS
04. Line Out	09. CF	14. VGA
05. Power I	10. COM	15. USB * 2



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)