


10.4" Small Size Panel PC with Touch Screen, MainBoard, CF, 70W P/S

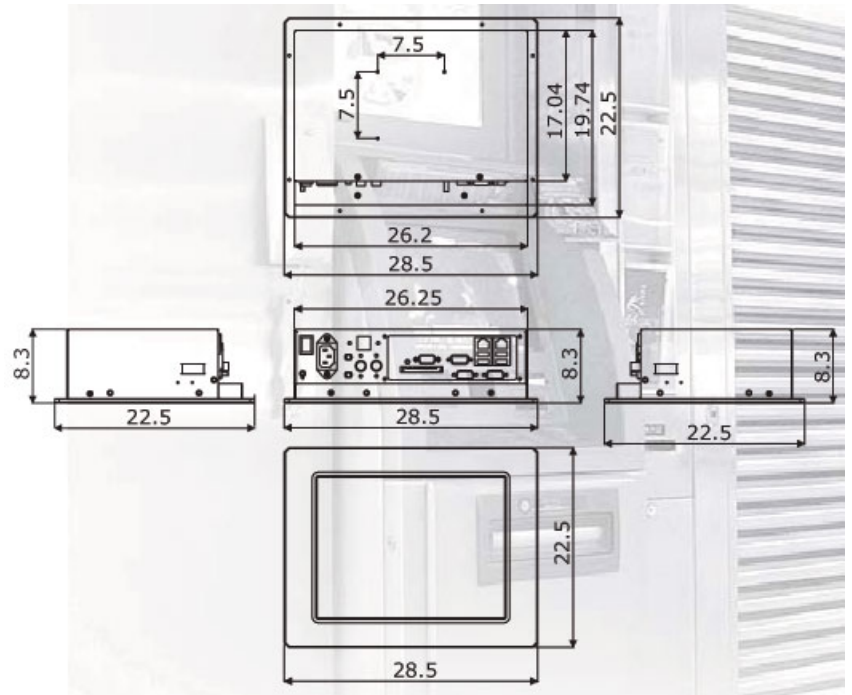

BSPC1040VT-F0/ BSPC1040VT-F9

Features

- Aluminum front panel design
- 10.4" TFT color panel display
- Built-in touch screen, HS-2610(M), 100~250V AC in 70W P/S
- Provides Intel P-M/C-M or ULV Intel C-M processor (option)
- Onboard graphics, ethernet, audio controller
- 1 x 2.5" HDD space
- 1 x 4cm ball bearing cooling fan
- Provides CF, 3 x COM, 6 x USB2.0

Display

LCD Size

10.4"

Max Resolution

800(H) x 600(V) pixels RGB stripes arrangement

Brightness (cd/m²)

250 cd/m²(Typ.)

LCD Color

6-bit, 262,144 colors

Pixel Pitch (mm)

0.264 x 0.264

Touch Screen

10.4" resistive



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

System

SBC Model

HS-2610(M)

CPU

Intel Pentium M/Celeron M processor 1.3~2.0GHz or
ULV Intel Celeron M processor 600MHz/512K (option)

BIOS

AMI PnP Flash BIOS

System Chipset

Intel 852GM(E)/ICH4

System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR SDRAM

Display Chipset

Intel 852GM(E)

Audio Chipset

RealTek ALC202A

Ethernet Chipset

Intel 82551QM and 82562ET dual 10/100 Mbps LAN

Drive Bay

1 x 2.5" HDD space

Storage

1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec.
or 1~255 min.

Thermal Solution

1 x 4cm ball bearing cooling fan

Dimensions (LxHxW)

28.5 x 22.5 x 8.3 cm

Cut Out Size (LxH)

26.6 x 20.1 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Front Panel Protection

IP65 compliance

Power Supply

100~250V AC in 70W power supply

I/O Interface

External I/O

Line Out, MIC In, 6 x USB2.0, PS/2 KB, PS/2 MS, VGA, CF, 3 x COM, 2 x LAN

Rear I/O

