


# IR 6-points Touch Widescreen Display





IR 6-points Touch Chassis Mount, 26" LCD monitor, 1920 x 1080, 380 nits, DVI+VGA+AUDIO, CCFL backlight of panel + Flex wall mount, USB Controller. (High speed two point multi-touch --Support Linux and Window XP/7/8)

(Model: BCHW2600-MOT)

## FEATURES:

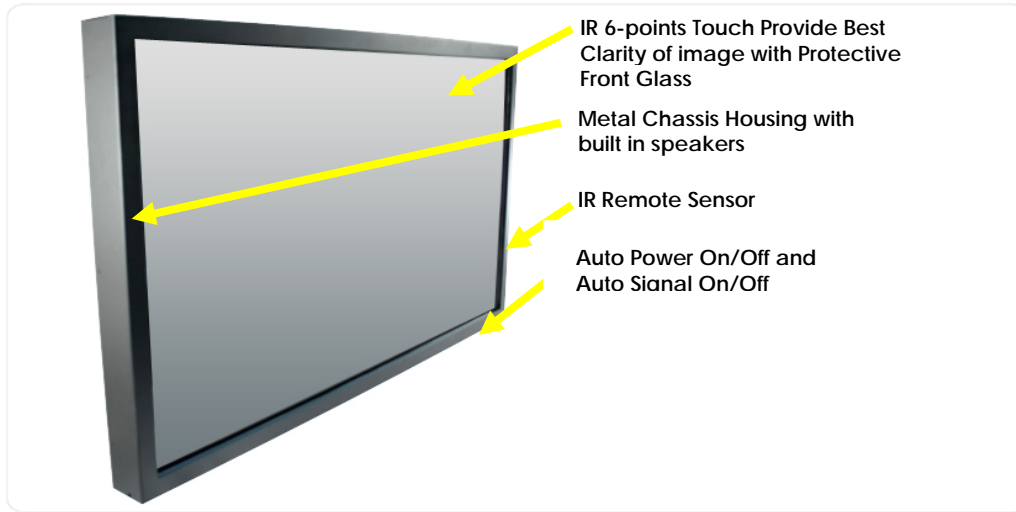

**BCH Series  
IR 6-points Touch  
Widescreen Display  
Chassis Mount  
LCD Monitor**

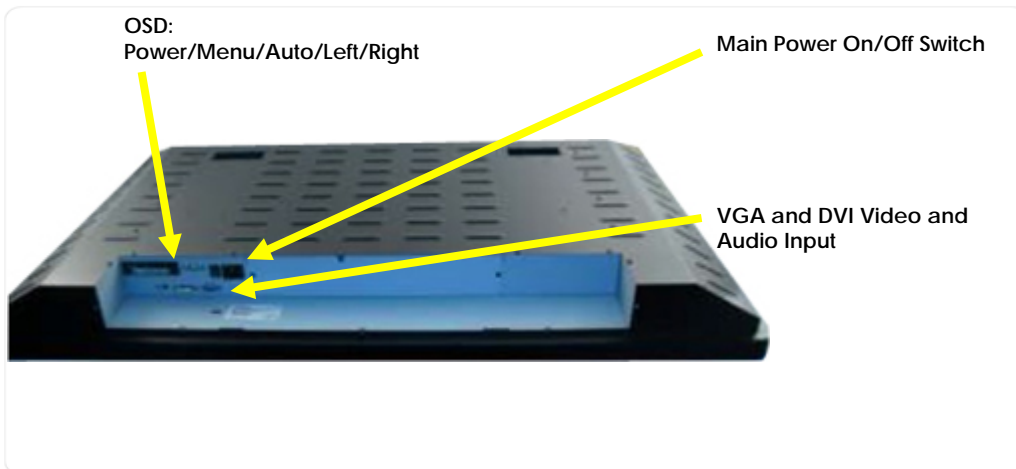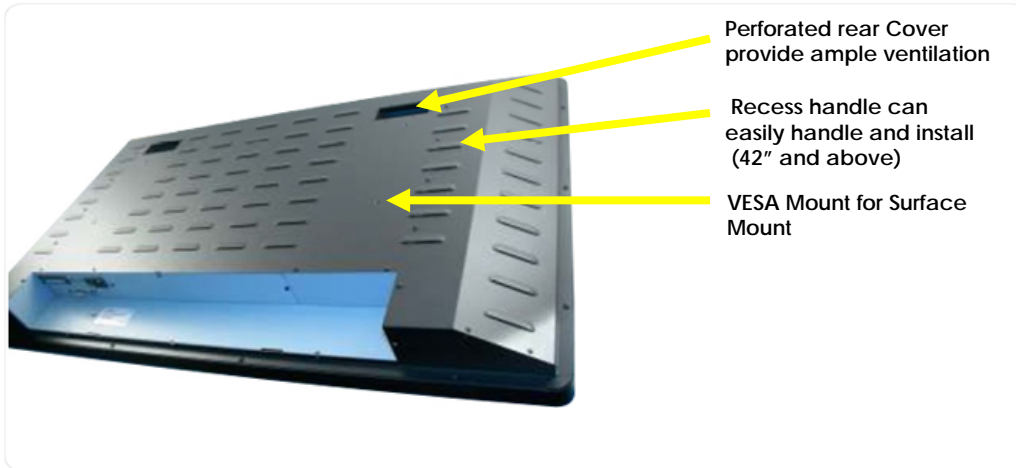

## Display Specifications – CCFL PANEL

Active Screen Size	26" (16:9)
Display Area(mm)	575.769(H) x 323.712(V)
Number of Pixels	768 x 1366
Contrast Ratio	3000 : 1
Colors	16.7M
Brightness(cd/m <sup>2</sup> )	350 up to 420
View Angle	R/L178° x U/D178°
Response Time	6.5 ms
Backlight Life Time	50,000/hr

## Power

Power Input	100V~240V AC 50/60Hz
Total Power Consumption	54 W

## Mechanical Specifications


Operating Temp.	0°~35°C
Relative Humidity	20~80% RH
Storage Temp.	-20°~40°C
Dimensions(mm)	662(L)x409(W)x124(D)
Mounting(LxW/mm)	400(L)x100(W)

## Accessories

CD x 1
Power Cord x 1
Wall mount x 1
Remote Control x 1
I/O Cover x 1



## Mechanical Drawings

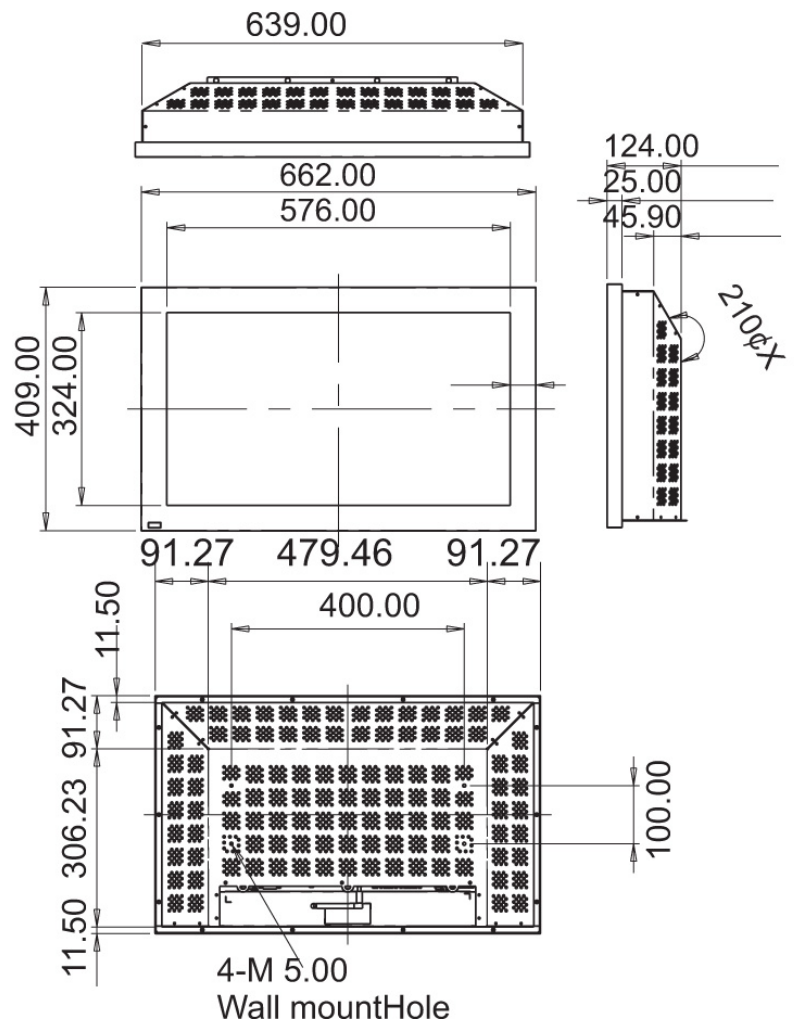

## Included Low Profile Wallmount Bracket

