




IR 6-points Touch Widescreen Display



IR 6-points Touch Chassis Mount, 65" LCD monitor, 1920 x 1080, 380 nits, DVI+VGA+AUDIO, CCFL backlight of panel +Flex wall mount, USB Controller. (High speed two point multi-touch -- Support Linux and Window XP/7/8)

(Model: BCHW6500-MOT)

FEATURES:

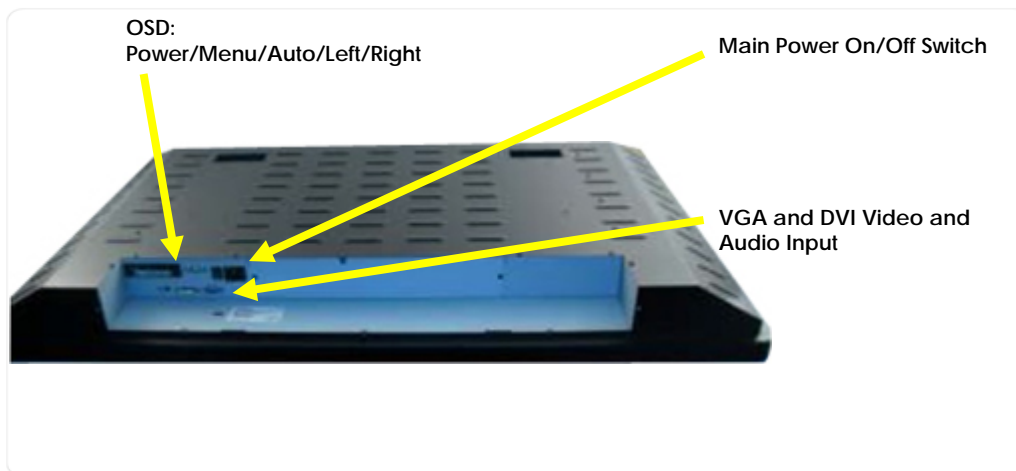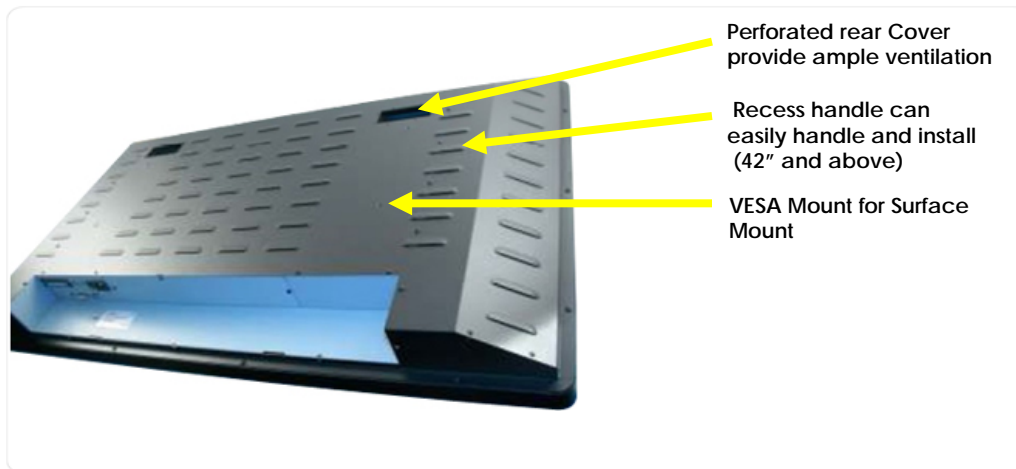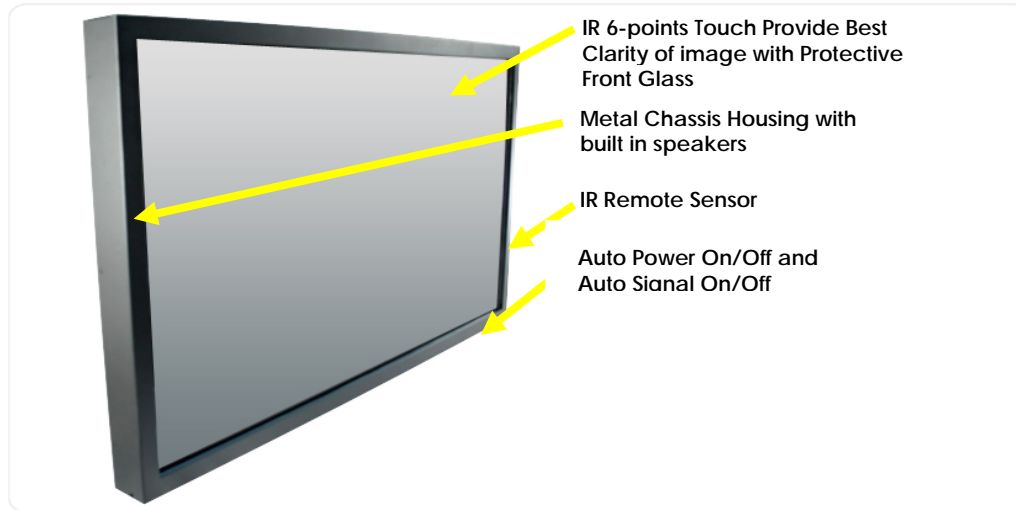

Display Specifications – CCFL PANEL

Active Screen Size	65" (16:9)
Display Area(mm)	1428.48 (H) x 803.52 (V)
Number of Pixels	1920 x 1080
Contrast Ratio	4000 : 1
Colors	1073.7M (10bit)
Brightness(cd/m ²)	500
View Angle	R/L178° x U/D178°
Response Time	5.5 ms
Backlight Life Time	50,000/hr

Power

Power Input	100V~240V AC 50/60Hz
Total Power Consumption	455 W

Mechanical Specifications


Operating Temp.	0°~35°C
Relative Humidity	10~90% RH
Storage Temp.	-20°~40°C
Dimensions(mm)	1553(L)x927(W)x151(D)
Mounting(LxW/mm)	800(L)x200(W)

Accessories

CD x 1
Power Core x 1
Wall mount x 1
Remote Control x 1
I/O Cover x 1



Mechanical Drawings

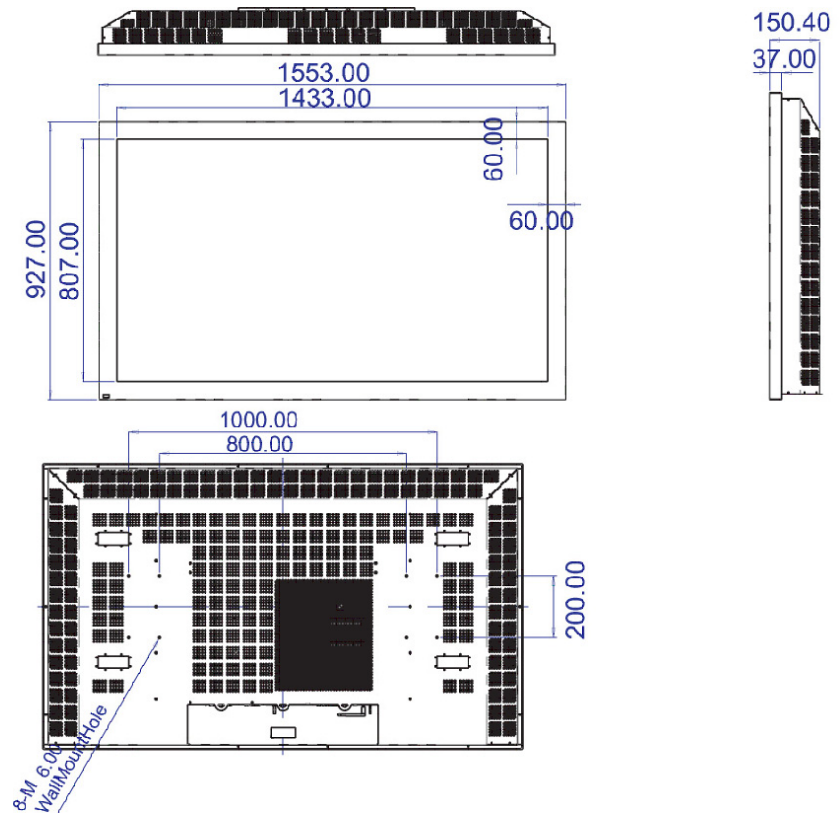

Included Low Profile Wallmount Bracket

