

IP65 FRONT PANEL MOUNT (METAL-5MM)



10.4" LCD monitor, 1024x768, 450nits, VGA + DVI Input
Rear OSD, including rear screw/Clamp/VESA Mount with
PCT multi touch screen + USB Controller

MODEL: CPM1040IPX-PCT

FEATURES:

- Modularize mechanical design provides flexible product configuration and easy maintenance
- Optional build-in touch screen for interactive application
- VGA + DVI Input
- PCT Multi Touch + USB Controller
- VESA Mount

SPECIFICATIONS:


Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating
	Aspect Ratio / Size	4 : 3 / 10.4" viewable diagonal area
	Active Area / Pixel Pitch	214.4(H) x 159.6(V) mm / 0.2055(H) x 0.2055(V) mm
	Native Resolution / Colors	1024(H) x 768(V) / 16.2 M
	Brightness / Contrast	450 cd/m ² (typ) / 3000 : 1
	Response Time	< 25 ms
	Viewing Angle (typical)	85/85/85/85
	Light Source	LED backlight, Long life, 35,000 hrs (typ)
Input Terminals	VGA + DVI Input	
Power	Power Input	12V DC input with adapter
	Power Consumption	6W - 7.2W
Operating Condition	Temperature / Humidity	-30°C ~ 80°C (-22°F ~ 176°F) , 10% ~ 90% (no condensation)
Dimensions	Physical	Please refer to Drawing
	Carton	W x H x D = TBD

Options	Touch	Video / TV	Enhanced Panel	Others
	Resistive touch	SV + AV	Panel with LED backlight	Digital Signage (Stand alone)
	Capacitive touch	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
	SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
	Infrared touch		Sunlight Readable	Light Sensor
	Protected glass			Auto-Dimming

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

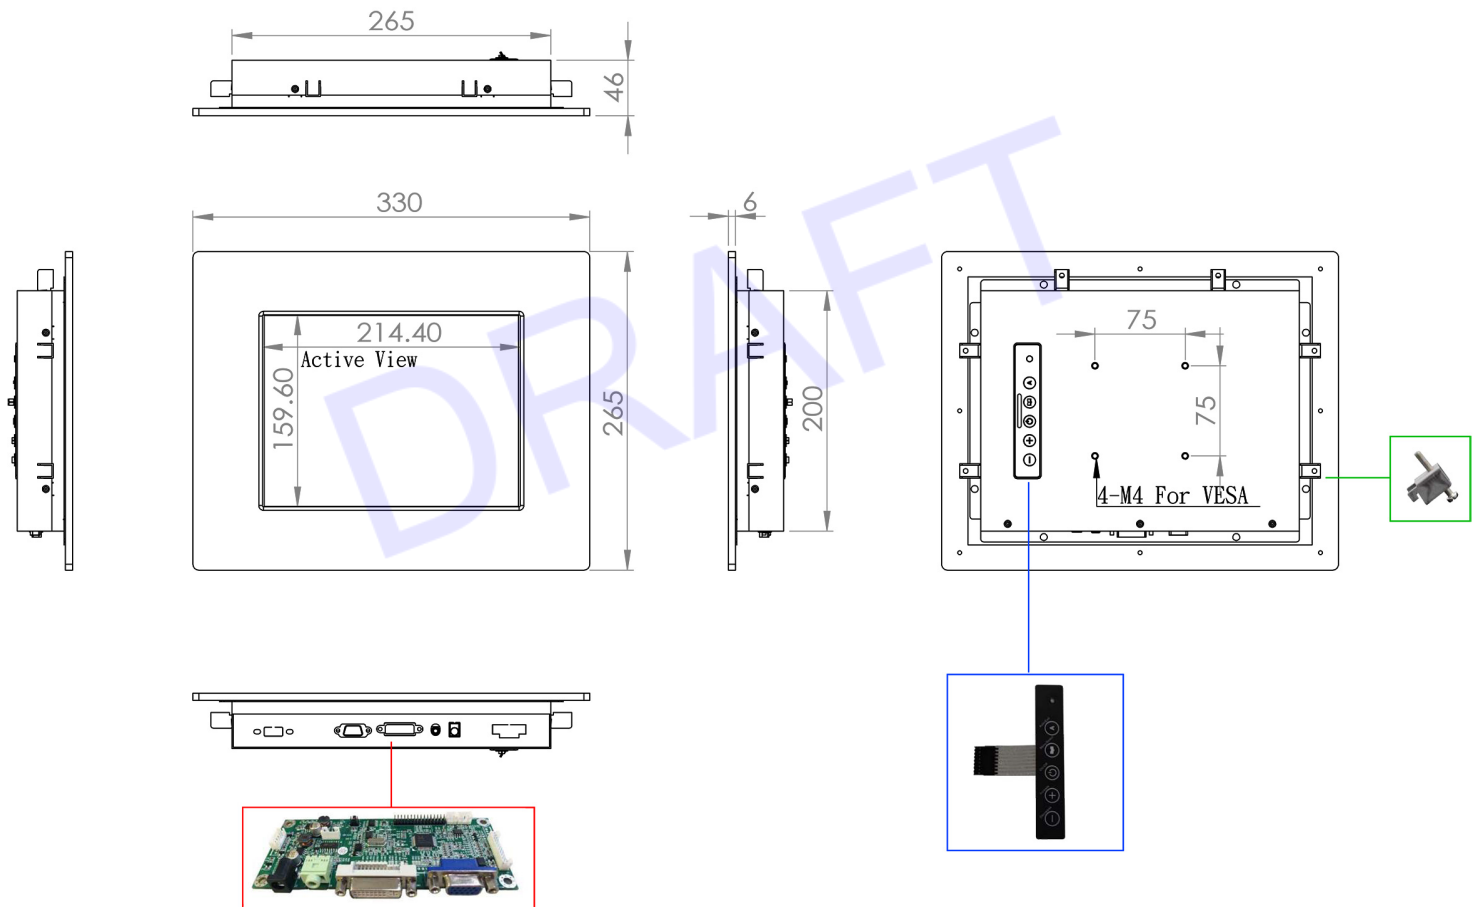

Drawing No.: CPM1040IPX-PCT-11222022-V1