

Mini All-in-one Panel PC

Industrial 5.6" LCD Resistive Touch Mini All-in-One
Panel PC Optional with Table Stand



Model: MPC0560

FEATURES:

All-in-one Light Weight panel PC

Light weight and Thin

LCD Size: 5.0"/5.6"/5.7"/7.0"/8.9"/10.1"/12.1"/15"

Smooth touch surface across the entire face of the monitor

Touch Panel: 4W Resistive Touch

VESA Mounting at Rear

VIA Nano/Eden CPU+VX800U with Fan

Memory: DDRII-667 SO-DIMM up to 2G

Storage Device: Internal SSD up to 8G or 2.5" Hard Disk

Winodws 7, Windows XP(e), CE, Linux



SPECS:

Processor	A --> VIA Eden 500MHz + VX800 Fanless B --> VIA Eden 1G + VX800 w/wo FAN C --> VIA Nano 1G + VX800 w/wo FAN D --> VIA Nano 1.3G +VX800 with FAN
Display	VGA 1920x1440 Maximum
Memory	DDRII-667, SO-DIMMs 200 pin socket up to 2GB
Storage	Internal SSD up to 8G, 2.5" Hard disk space
Panel	5.6" VGA 640X480 LED Resister type touch panel
LAN	Realtek 8102EL support 10/100 Base-T,Gbe(option)
OS Support	Windows 7, Windows XP(e), Windows CE , Linux

I/O Type

TYPE 1

Side I/O Panel

Front I/O Panel

1 x Power Button
1 x Power LED
1 x HDD LED
1 x USB 2.0
1 x Audio Out
1 x MIC Input

Rear I/O Panel

1 x VGA
1 x RJ45
1 x Micro SD
2 x USB
1 x DC Jack(+12V)
1 x Extension Outlet

The extension

1 x USB 2.0
4 x RS-232
Power Supply

Power Consumption

TYPE 2

Side I/O Panel

1 x WIFI

Front I/O Panel

1 x Power Button
1 x Power LED
1 x HDD LED
2 x USB 2.0
1 x Audio Out
1 x MIC Input

Rear I/O Panel

1 x VGA
1 x RJ45
1 x Micro SD
2 x USB
1 x DC Jack(+12V)
1 x Extension Outlet

The extension


1 x USB 2.0
4 x RS-232
Input:100~240VAC 50/60Hz
Output:+12V 3A

A Model --> 7.5W

B Model --> 10W

C Model --> 16W

D Model --> 18W

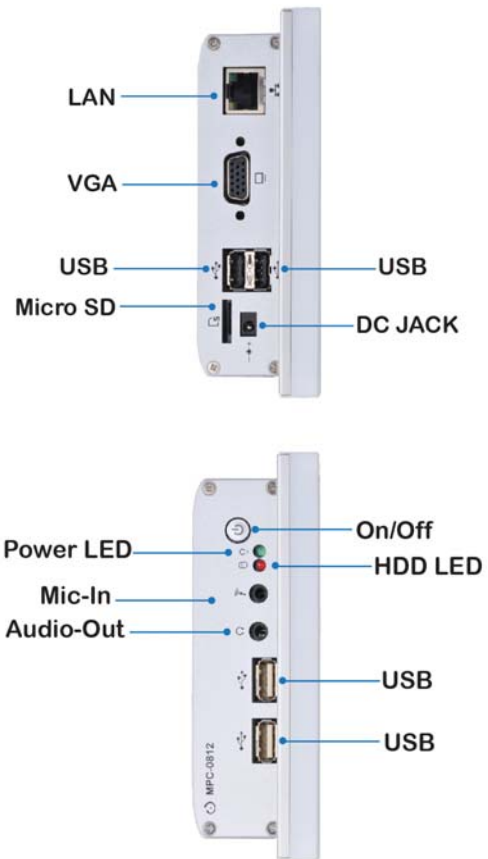

Drawings:

