

NPM1700AT/1721AT

17" TFT SXGA 4:3 Flush Panel PC with Intel® Atom™ D525, 1.8GHz, Touch Screen, 1GB DDR3, 4 x USB, 4 x COM and VGA



Main Features

- 4:3 17" Fanless Panel Computer
- Intel® Atom™ D525, Dual Core, Low Consumption CPU
- Flush Panel by 5-wire Touch Screen
- Dual GbE/ 2nd display-VGA/ Line-in/ Line-out/ MIC-in/ PS2 KB/MS
- USB x 4/ 2 x Mini-PCle sockets/ 1 x CF/ 2 x RS232/ 422/ 485
- Optional Wi-Fi Module / 2.5"HDD / 2 x COMs / GPIO / CAN Bus
- DDR3 1GB / 2.5" HDD Bracket
- IP65 Compliant Front Panel
- Mounting Support: Panel/ Wall/ Stand/ VESA 100mm x 100mm
- Wide Range Power Input 12V~ 30V DC

Product Overview

Incorporated a 17" 4:3 touch screen LCD panel with resolutions up to 1280x1024 (SXGA) and 380 nits brightness, industrial motherboard for versatile industrial applications, the NPM1700AT is fanless Panel PC based on the Atom™ D525 processor. The Panel PC comes with flush panel design and can have IP65 front for industrial applications. The touch screen provides the durable, reliable, and scratch-able benefits for easy maintenance in wide applications, especially for food and beverage industrial, which require strictly cleaning process.

The NPM1700AT Panel PC has 2GbE LAN, 2 x COMs, 2x USB, PS2 KB/MS, and Line-in/Line-out/MIC-in. With wide range power input from 12V to 30V, the APPC series can have industrial field and machine devices. With 2nd display by VGA, APPC series can hook 2nd display via VGA port with different content. Depending on applications, customers can easily remove rear chassis to implement DDR3 memory, 2.5" HDD and 2 x Mini-PCle. Based on NPM1700AT model, NPM1721AT has two RS-232/422/485 COM ports with isolation to fit industrial applications plus two additional RS-323 COM ports. In addition, one GPIO port for 4 input/output is available for digital control. There is also an optional CAN bus interface for communication with CAN bus device.

Specifications

Panel

- >LED Size: 17", 4:3
- >Resolution: SXGA 1280x1024
- >Luminance: 380cd/m2
- >Contrast ratio: 1000
- >LCD color: 16.7M
- >Viewing Angle: 80(U), 80(D), 85(L), 85(R)
- >Backlight: CCFL
- >Touch screen: 5-wire resistive (flush panel type)
- >Touch light transmission: 81%
- >Touch interface: USB

System

- > CPU: Intel® Atom™ D525, 1.8Hz
- > BIOS: AMI BIOS
- > System chipset: Intel® ICH8M
- > System memory: 1x 204-pin DDR3 SO-DIMM socket, 1G DDR3 (Default), Support up to 2GB DDR3 800, Non-ECC and Un-buffered
- > SSD: one external locked CF socket by IDE support Type I/II compact Flash card
- > Hard drive bay: optional 2.5" SATA HDD or SATA DOM

- > Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (Tolerance 15% under room temperature 25°C)
- > H/W status monitor: Monitoring system temperature, and voltage
- > Expansion: 2x Mini-PCle sockets
- > NEXCOM Xcare platform system management supported

Rear I/O


- > CAN BUS (for APPC1721T Optional)
- > GPIO (for APPC1721T only): 4 x digital in / 4 x digital out
- > COM #1: RS232/422/485 (NPM1721AT w/ 2.5kv isolated)
- > COM #2: RS232/422/485 (NPM1721AT w/ 2.5kv isolated)
- > COM #3 & COM #4 (for NPM1721AT only): 2x RS232
- > Ethernet: 2 x RJ45
- > 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line out; 1 x Line in; 1 x MIC-in
- USB: 4 x USB 2.0
- PS2 keyboard/ mouse
- Power switch
- Reset button



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

Dimensions

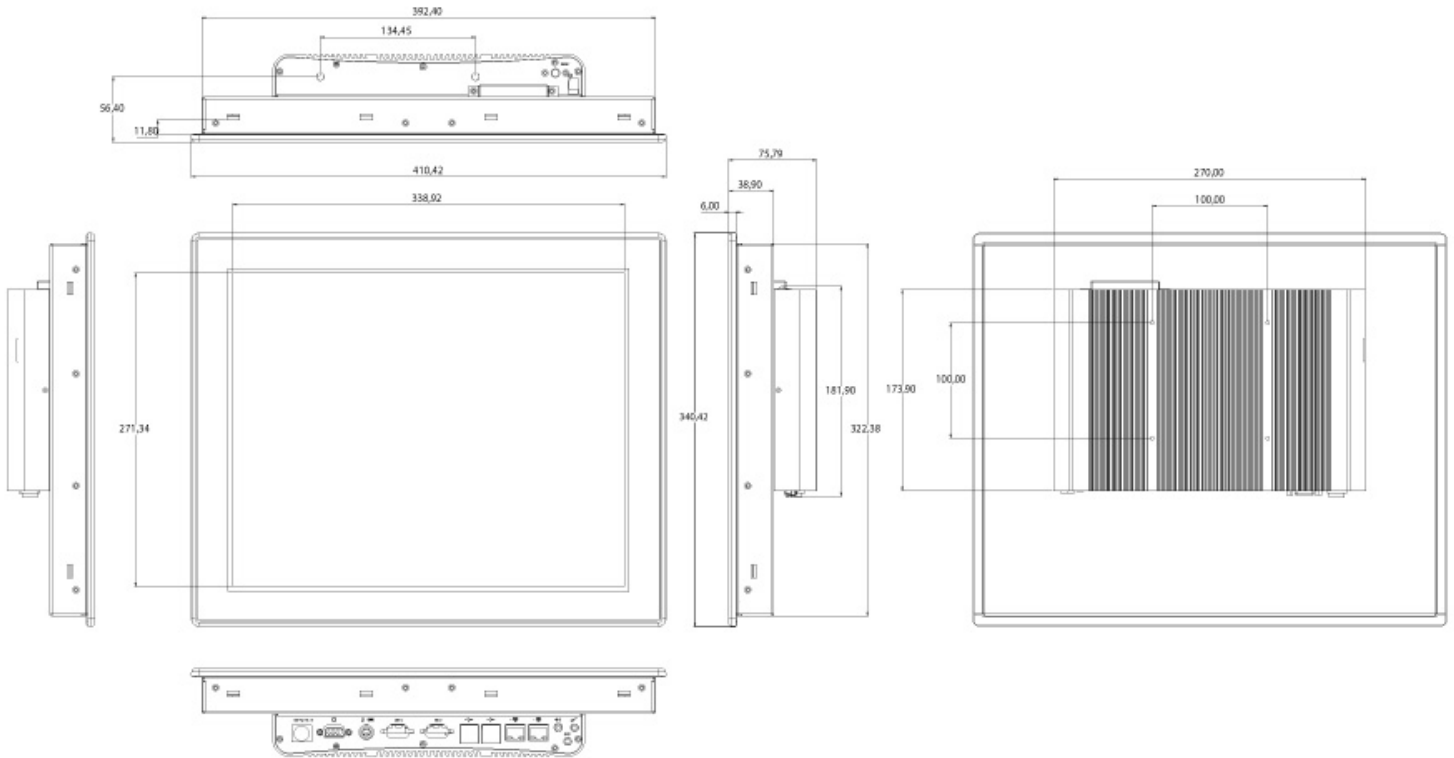

Audio

- > AC97 codec: Realtek ALC888
- > Audio interface: Line out/Line in/MIC-in Audio Jack

Ethernet

- > LAN chip: dual Intel® 82574L Gigabit LAN
- > Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- > Color: pantone black
- > IP protection: IP65 front
- > Mounting: panel/ wall/ stand/ VESA 100mm x 100mm
- > Power input: 12V~ 30V DC
- > Power adapter: Optional AC to DC power adaptor (+12V, 60W)
- > Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 0.5Grms @sine, 5~500Hz, 1hr/axis (HDD Operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (Non-operating)
- > Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- > Operating temperature: -5°C to 50°C
- > Storage temperature: -20°C to 75°C
- > Operating humidity: 10%~90% relative humidity, non-condensing
- > Dimension: 410.4 x 340.4 x 75.79 mm
- > Weight: 6.3 Kg

Certifications

- > CE approval
- > FCC Class A



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com