

VPPC1500 Series

Fanless 15" XGA TFT
Multifunctional Plastic Panel PC

Intel®
AMD

GbE

2W
AMP

Mini PCIe

CF

1 COM

2 USB

Fanless

VESA

Wide
Voltage



Key Features:


- 15" 5-wire Resistive XGA TFT
- VPPC1500AT: Intel® Atom™ D525 Dual Core 1.8GHz CPU
- VPPC1500AM: AMD eOntario T40E 1.0 GHz CPU
- GbE, Audio, 2 x 2W Amplifier
- 1 CF, 2 USB, 1 COM & 1 Mini-PCIe
- Wide Voltage +12V ~ +28V, ErP Power
- Power-On Timer
- Fanless Operation, VESA Compliance
- Programmable Function Key

Specifications:

Model	VPPC1500AT	VPPC1500AM
• LCD Size	15", 4:3	15", 4:3
• Resolution	1024 x 768 XGA, 16.7M	1024 x 768 XGA, 16.7M
• Pixel Pitch	0.297mm (H) x 0.297mm (V)	0.297mm (H) x 0.297mm (V)
• Luminance	300cd/m2	300cd/m2
• Contrast Ratio	700:1	700:1
• Viewing Angle	70(U), 70(D), 75(L), 75(R)	70(U), 70(D), 75(L), 75(R)
• Response Time	8ms	8ms
• Backlight	2 x CCFC	2 x CCFC
• Touch Screen	5-wire Resistive	5-wire Resistive
• Light Transmission	80%	80%
• Touch Interface	USB	USB
System		
• Board	EBM-PNV	EBM-A50M
• CPU	Onboard Intel® Atom™ D525 Dual Core 1.8GHz CPU	Onboard AMD eOntario T40E 1.0GHz CPU
• System Chipset	Intel® ICH8-M Chipset	AMD A50M Chipset
• I/O Chip	Nuvoton W83627DHG-P	Nuvoton W83627DHG-P
• System Memory	Onboard 1GB Up to 2GB & One 204-pin SODIMM Supports Up to 4GB DDR3 800MHz SDRAM	Onboard 2G DDR3 1066MHz SDRAM, One 204-pin DDR3 SODIMM Up to 4GB DDR3 1066MHz SDRAM
• SSD	One CF Socket Supports Type I/II Compact Flash Card	One CF Socket Supports Type I/II Compact Flash Card
• Hard Driver Bay	One 2.5" SATA HDD/ SSD	One 2.5" SATA HDD/ SSD
• WiFi	Optional USB or Mini PCIe WiFi Module	Optional USB or Mini PCIe WiFi Module
• Watchdog Timer	Reset: 1 ~ 255min. and 1sec. or 1min./step	Reset: 1sec. ~ 65535 sec./min. and 1sec. or 1min./step
• H/W Status Monitor	Monitoring System Temperature, Voltage, with Auto Throttling Control	Monitoring System Temperature, Voltage, with Auto Throttling Control
• Expansion	1 x Mini PCIe Slot	1 x Mini PCIe Slot
Rear I/O		
• Serial Port	1 x RS-232	1 x RS-232
• Ethernet	1 x RJ-45 (Intel® 82574L Gigabit Ethernet, Optional Dual 82574L Gigabit Ethernet)	2 x RJ-45 (Dual Realtek RTL8111E Gigabit Ethernet)
• VGA	1 x DB-15	N/A
• HDMI	N/A	1 x HDMI
• Audio	1 x Line-out (Realtek ALC888 Supports 5.1-CH Audio)	1 x Line-out (Realtek ALC892 Supports 5.1-CH Audio)
• USB	2 x USB 2.0	2 x USB 2.0
• Mouse & K/B	1 x PS/2 KB & MS	N/A
• Speaker	2 x 2W	2 x 2W



Diagram:

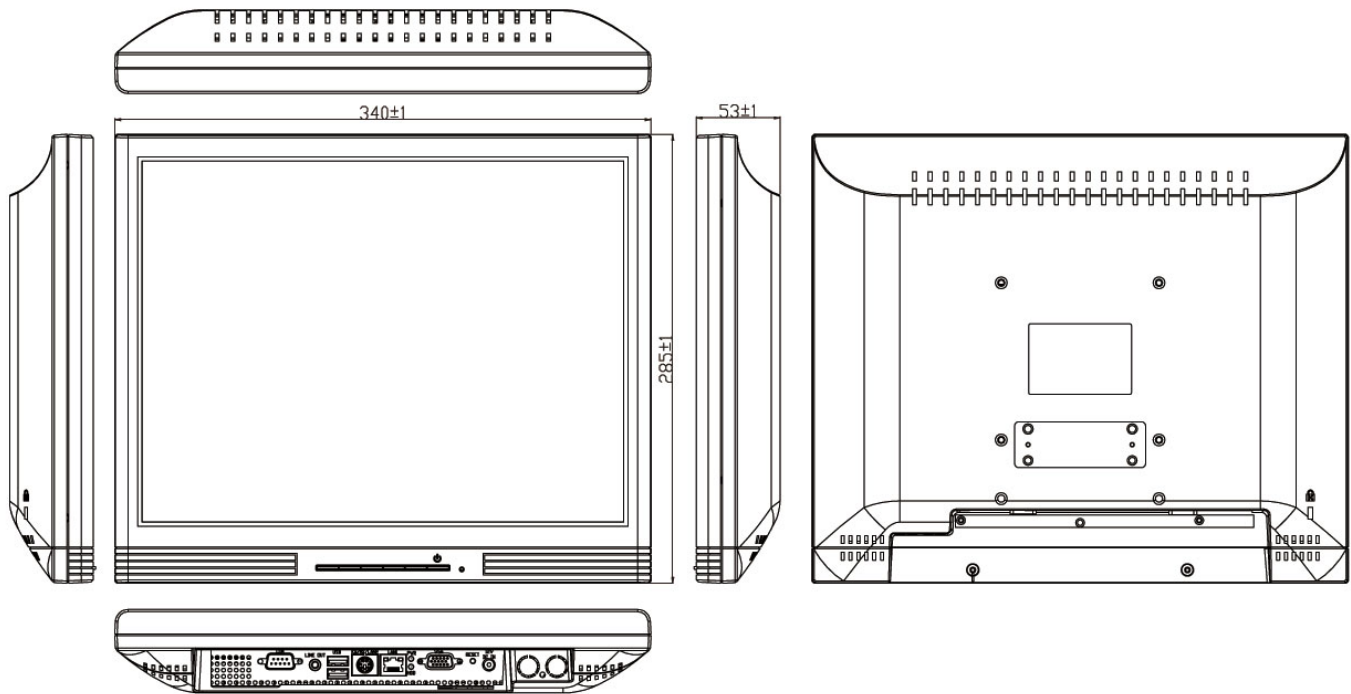

Unit: mm

Environment & Mechanical	
• Color	Front & Rear Panel Black (Plastic)
• Mounting	Wall/ Stand/ VESA 100mm X 100mm
• System Power Requirement	+12V ~ +28V DC Power Input
• Power Adapter	Input: 100 ~ 250Vdc/ 47 ~ 63Hz Output: 60W Adapter (12V @ 5A Adapter)
• Operating Temperature	0 ~ 40°C (32 ~ 104°F)
• Storage Temperature	-10 ~ 50°C (14 ~ 122°F)
• Relative Humidity	0% ~ 90% Relative Humidity, Non-condensing
• Dimensions (W x D x H)	340mm x 285mm x 53mm
• Weight	2.79Kgs