

# Open Frame LCD Anti-Shock, EN50155

Open Frame, w7" LCD monitor, 800x480, LED-400nits, VGA+ HDMI + USB + 12V DC. WT(-30~80C), 12VDC-IN w/ Adapter. Build-in PCAP Compliance EN50155 Anti-vibration & Anti-shock OEM bezel dimension: Width: 221mm, Height: 111mm



**Model: ERDW700-PCAP-AM01**

## FEATURES

- Modularize mechanical design provides flexible product configuration and easy maintenance
- Optional build-in touch screen for interactive application
- Available with auto-brightness sensor offers application in day and night
- Complete custom design/solution for OEM customers
- Auto Power On: Monitor is always "ON" when connect to power.
- Auto Video Signal On: Monitor (Backlight) will turn off when no video signal, but it will Auto turn back on.

## SPECIFICATIONS

<b>Panel</b>	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 7" viewable diagonal area	
	Active Area / Pixel Pitch	153(H) x 92.04(V) mm / 0.1905(H) x 0.1905(V) mm	
	Native Resolution / Colors	800(H) x 480(V) / 262 K	
	Brightness / Contrast	400 cd/m <sup>2</sup> (typ) / 700 : 1	
	Response Time	< 30 ms	
	Viewing Angle (typical)	H. 160° (- 80° ~ + 80°) , V. 160° (- 80° ~ + 80°)	
	Light Source	LED backlight, Long life, 35,000 hrs (typ)	
<b>Input Sources</b>	PC System	Signal	Analog RGB (0.7/1.0 V <sub>p-p</sub> , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F <sub>h</sub> : 30 - 82Khz , F <sub>v</sub> : 50 -75Hz
	Audio System	2W speaker x 2	
<b>Input Terminals</b>	VGA+ HDMI		
<b>Convenient Features</b>	Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)		
	OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing)		
<b>Power</b>	12V DC in		
<b>Power Consumption</b>	Operation / Power Saving	9.625 watt , < 2 watt (Support DPMS)	
<b>Operating Condition</b>	Temperature / Humidity	-30°C ~ 80°C (-22°F ~ 176°F) , 10% ~ 90% (no condensation)	
<b>Storage Condition</b>	Temperature / Humidity	-30°C ~ 80°C (-22°F ~ 176°F) , 10% ~ 90% (no condensation)	
<b>Certification</b>	FCC , CE		
<b>Dimensions</b>	Physical	Please refer to Drawing	
	Carton	W x H x D = TBD	
<b>Weight</b>	N.W. / G.W.	3 Kgs / 4 Kgs	
<b>Container Loaded</b>	20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)	


<b>Projected Capacitive Touch – Multi Touch (6mm Anti-Vandal glass)</b>	Transparency	90%±2%
	Resolution	2048 x 2048
	Support Points	Dual Points
	Touch Method	Finger, gloved hand or any other pointer

<b>Options</b>	Touch	Video / TV	Enhanced Panel	Others
	Projected Capacitive	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Protected glass	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
		SV + AV + TV	Wide Temperature	Motion Sensor
			Sunlight Readable	Light Sensor
			Auto-Dimming	

\*Specifications subject to change without notice, not responsible for typographical errors.

# MECHANICAL DRAWINGS

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

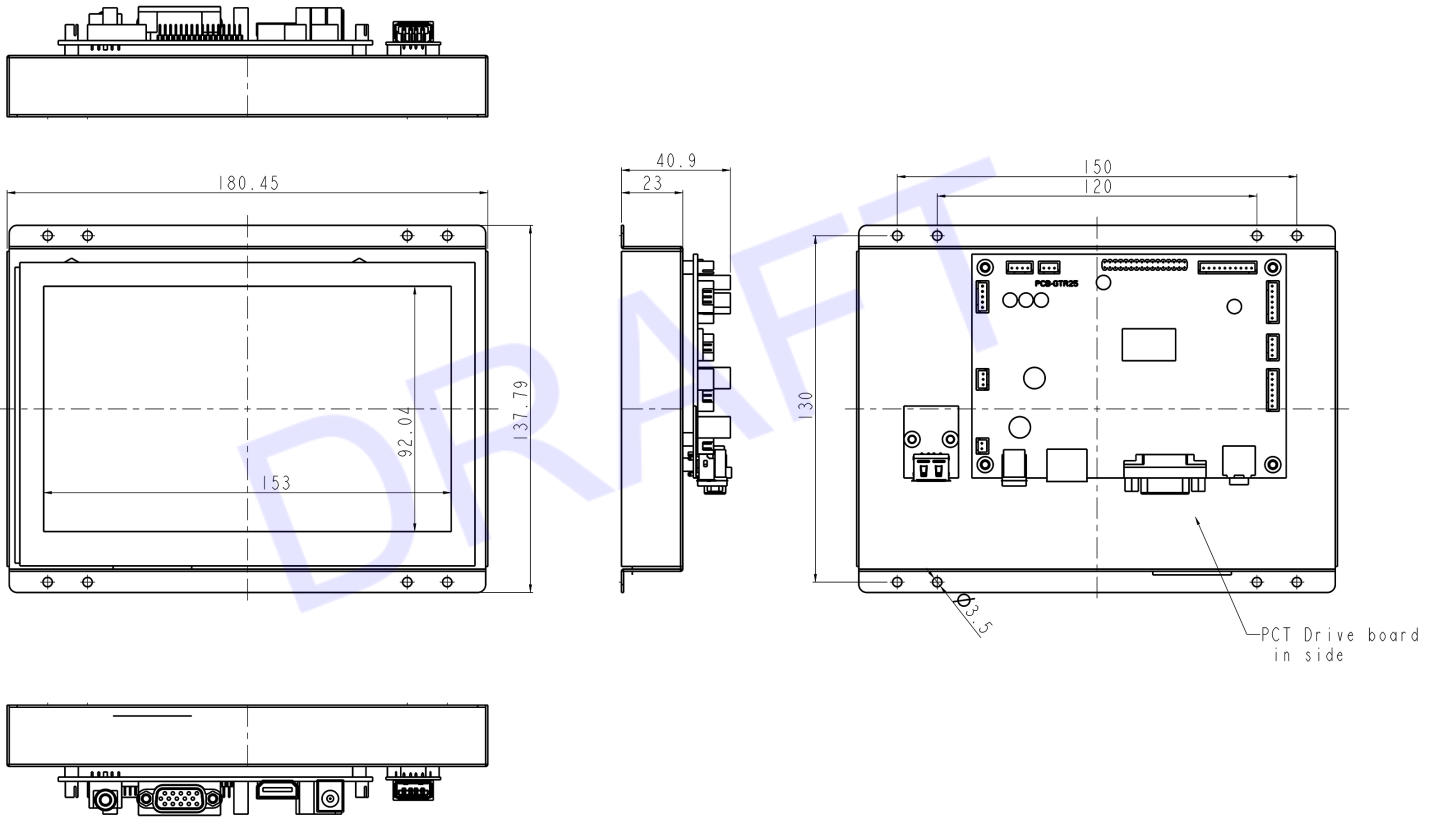

Drawing no.: ERDW700-PCAP-AM01-11302022-V1