

Sunlight Readable

Chassis/Surface mount Highbrightness LCD

15" 1024 x768 Metal Frame, 1500nits LED Sunlight Readable High Brightness
Wide Temperature -30C to 85C Rugged Industrial Chassis/Surface mount LCD
Monitor with VGA input. VGA + S-Video + Video (BNC connector) No speakers

Wide Temp: -30°C to 85°C



Model: YCH1500WTH2-BNC-DC

FEATURES:

- Sunlight Readable.
- LED Backlight.
- 15" TFT LCD with resolution up to 1024x768
- Wide input range: 9-36 VDC Terminal Block "+" and "-".
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


SYSTEM SPECIFICATIONS

Brightness (cd/m²)	1500
Display Resolution (pixel)	XGA(1024x768)
Display Color	262K / 16.2M
Viewing Angles (CR≥10)	80 / 80 / 70 / 60
Contrast Ratio	700:1
Response Time (msec)	8
Backlight Unit	LED

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

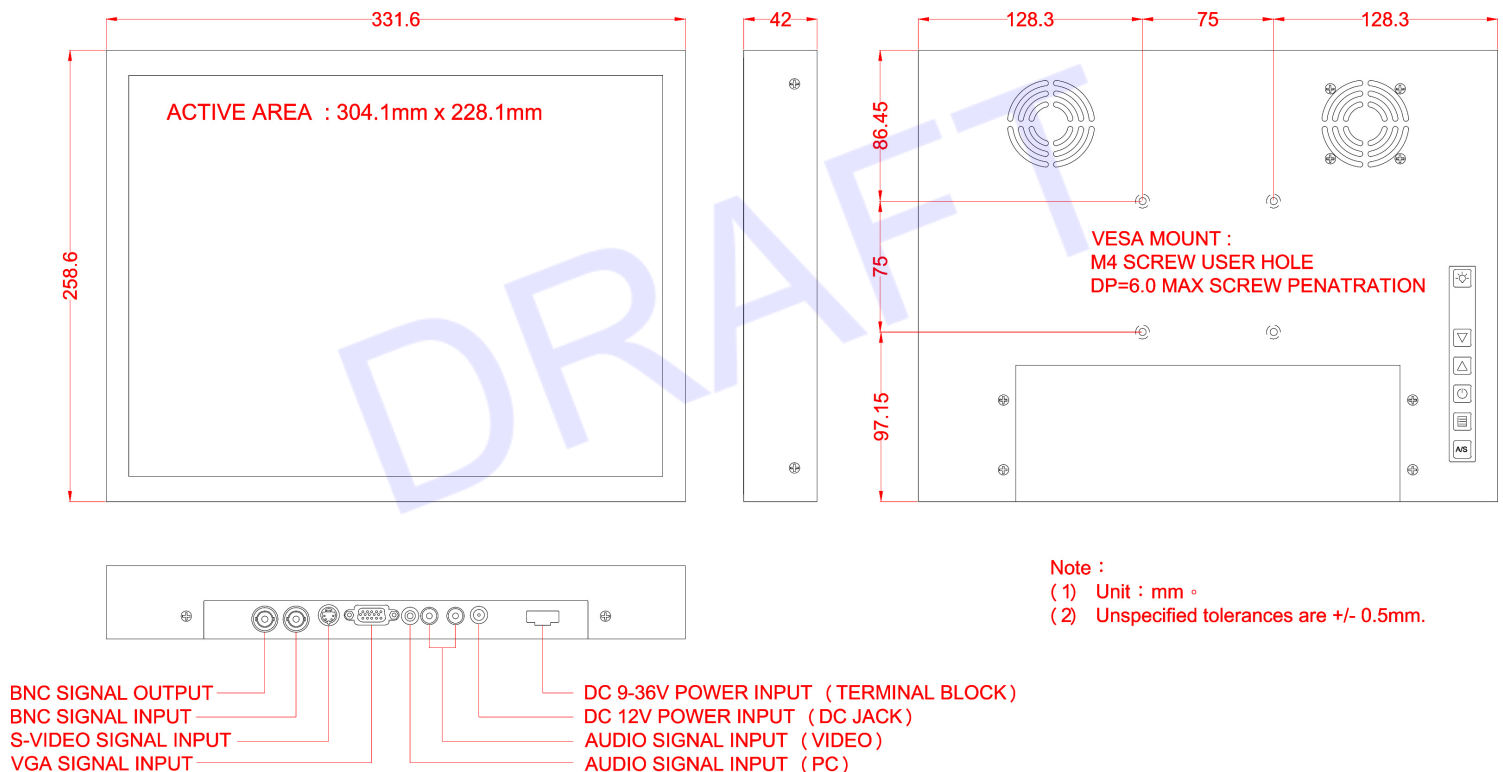

Drawing No.: YCH1500WTH2-BNC-DC-10262022-V1