

RUGGEDIZED MULTI-HEAD RACKMOUNT DISPLAY

23.8" Rugged Multi-Head HYDRA Design (Triple Configuration) Rackmount Display 4K Resolution High Brightness 1000nits Optional for PCAP Touch

MODEL: DF3D2380K



Our rugged 4k Panels let you take your desktop with you. With single, dual, and triple monitor configurations, sets the new standard in rugged Displays and Monitor Systems. It features native 4k panels that can be optional for high-brightness to over 1000 NITS, optically bonded, and configured with P-CAP Touchscreens. This on-the-go monitoring solution is a must for on-location go-getters. With V-Mount and Pole Mount battery solutions, and customizable I/O options including SDI, HDMI, Mini Display Port, built in kickstand, lightstand mounts, and dual battery solutions is only a small part of the expandable accessories and options available in this unit. Whether you're shooting your next feature film in Alaska, collecting drone footage in the Amazon Jungle, or mapping the Gobi Desert and can't wait to get to base camp or your editing studio to see your results in true 4k.

FEATURES:

- Multi-Head HYDRA Design
- Rugged All Aluminum Welded Construction
- Innovative Unified OSD Control
- Comes with both V-Mount and Pole Mount Battery cradles
- True 4K Panel Resolution
- 4P XLR 12VDC Power Inlet Port
- Comes with Splash Proof and Dust Proof Port Covers
- Comes with Storm Style Carrying Case

SPECIFICATIONS

- **UHD 3840 x 2160** (Max Res)
- **23.8" Ultra HD Backlit LCD w/ Anti-Glare**
- **Viewing Angles:** 89L/89R/89U/89D
- **Contrast Ratio:** 1000:1
- **Brightness:** 1000 NITS
- **Response Time:** 14ms
- **Surface Finish:** Anti Glare with acrylic Lens
- **Colors:** 1.07B
- **Dimensions:** TBD
- **Weight:** TBD
- **Power Consumption:** TBD

VIDEO CONTROLLERS

- **V34X Controller**
 - Broadcast Quality Embedded Controller
 - Max Resolution: 4096 x 2160
 - Available Inputs: HDMI 2.0, HDMI 1.4, Display Port 1.2, 6G SDI
 - Full Frame Memory Buffer, Ethernet and RS-232 Command and Control
- **V35X Controller**
 - Mid Grade Embedded Controller, Max Resolution 4096 x 2160
 - Available Inputs: VGA, HDMI 2.0, Display Port 1.2a, 6G SDI, Audio Input

OPTIONS


Enhancement Options:

- Anti-Reflective Lens
- P-CAP Touch
- Conformal Coated Electronics
- Optical Bodel Cover Glass

CONFIGURATION

TRIPLE(X3)



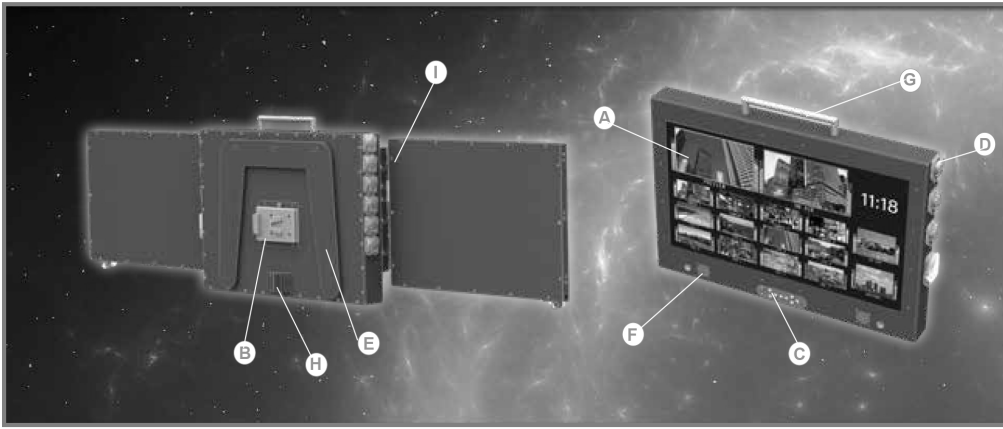

- A. LED Back Lit LCD With Lens Enhancement
- B. Comes with V-Mount and Pole Mount Battery Plates
- C. Unified OSD Button Board
- D. I/O Ports Splash and Dust Cover
- E. Integrated Kick Stand
- F. Integrated Audio Speakers
- G. Oversized Handle
- H. Bolt On Lightstand Mount
- I. Heavy Duty Field Replaceable Torque Hinges

MECHANICAL DRAWING

