

INDUSTRIAL HIGH BRIGHTNESS CLOSE FRAME MONITOR

21.5" 3000nits Close Frame Monitor, 1920*1080 Resolution,
VGA/DVI/HDMI, RS232, Black Painted Metal Chassis, VESA
Mount, Power: 24V DC-in, Auto Brightness/Temperature Control

Accessories: HDMI Cable*1, 50cm Light Sensor Cable*1
+ AC/DC Adapter, O/P: 24V/3.75A, I/P: 90V~264V, DC PLUG: 2.5*5.5mm
EU plug Type AC Power Cable Included



MODEL: GCHW2150HB3-V2

FEATURES:

- 21.5" LCD support 1920x1080 FHD resolution
- 3000 nits high brightness LCD applied
- Video signal IO: VGA / HDMI / DVI
- Special 24/7 long term operation design
- OSD command remote control by RS232
- 24V DC-in
- Auto brightness / temperature control integrated



SPECIFICATIONS:

FUNCTION	ITEMS	DESCRIPTION	REMARK	
Display	Display area (mm)	476.064 (H) x 267.786 (V)	21.5" diagonal	
	Brightness (nits)	3000		
	Optimum resolution	1920 x 1080		
	Contrast Ratio	1000: 1		
	View angle	178 / 178 degree		
	Backlight Life	50,000 hours		
Touch panel	Type	N/A		
	Total thickness	N/A		
	Support OS	N/A		
Video & audio	Video in	put VGA / HDMI / DVI		
	Audio	Jack-in	Yes	
		Built-in speaker	(Option)	
Control	OSD	5 keys	(LED) Power/Menu/Left/Right/Auto	
	RS232	Yes / D-sub (9 pin)		
	Auto brightness	Yes, External sensor cable	(Option) Waterproof sensor cover	
Power	Power Input voltage	DC 24V	DC jack:Φ5.5mm /ψ2.5mm	
	Consumption(W)	80 (typ.)		
Mechanical	Outline (mm)	502.8 x 297.2 x 49.6 (D)		
	Mounting	100 x 100 (mm) VESA		
	Weight	(TBD)		
Environment	Operating temp.	-10~45 °C		
	Storage temperature	-20~60 °C		
	Special items	Not Applied		
	Certification	CE / FCC		

*Specifications subject to change without notice, not responsible for typographical errors.

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

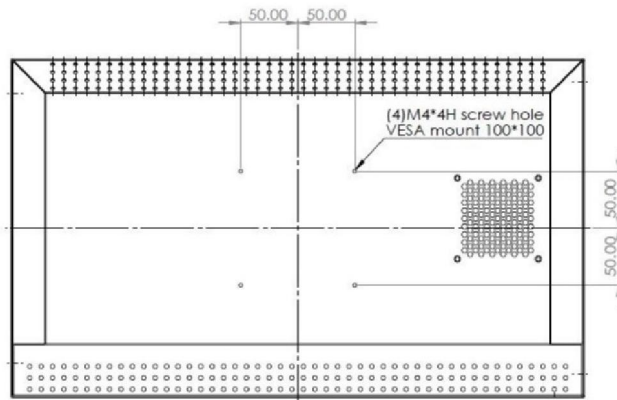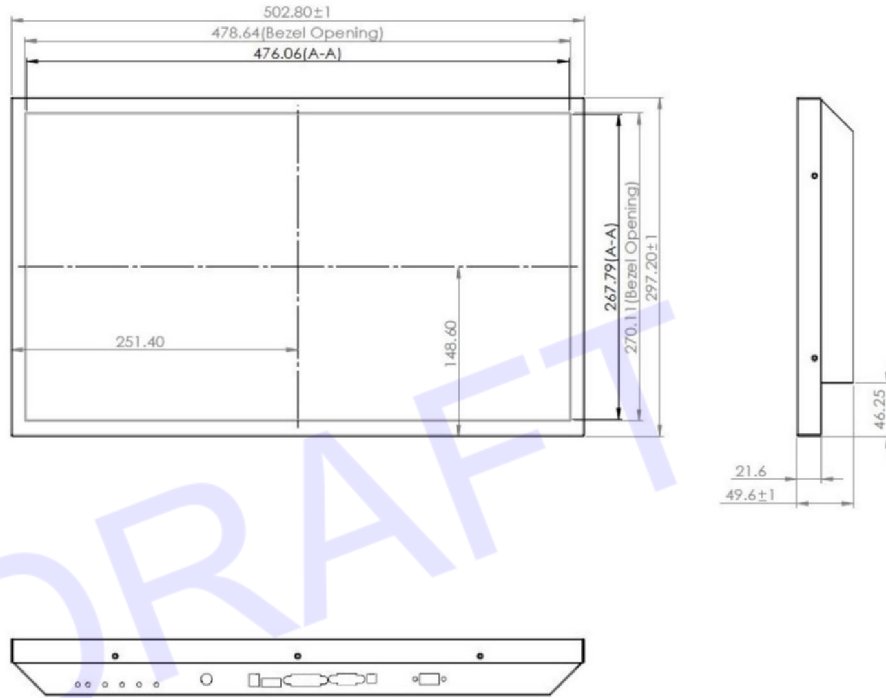

Drawing No.: GCHW2150HB3-V2-09132023-V1