



21.5" P-CAP Touch Open Frame with 2500nits Brightness
 40V AC-in,I/O: VGA,DVI, HDMI, light sensor built-in with 50cm sensor cable, black painted metal chassis with ear mount and VESA mounting, air bond P-cap integrated with USB port, accessories: AC power cable x1 VGA cable x1USB cable x150cm light sensor cable x1

Model: GOPW2150HB2-PCAP-V2

FEATURES:

- 21.5" LCD support 1920x1080 FHD resolution
- 2500 nits high brightness LCD applied
- Video signal IO: VGA / HDMI / DVI
- PCAP touch panel integrated by air bonding
- Special 24/7 long term operation design
- Ear mount / VESA mounting for easy installation
- Auto brightness / auto temperature control integrated
- OSD command remote control by RS232 port
- (option) Water proof light sensor head


SPECIFICATIONS:

Function	Items	Description	Remark	
Display	Display area (mm)	476.64 (H)x268.11 (V)	21.5" diagonal	
	Brightness (nits)	2500	TFT surface	
	Optimum resolution	1920x1080		
	Contrast Ratio	1000: 1		
	View angle	170/160 degree		
	Backlight Life	50,000 hours		
System	Video input	VGA/HDMI/DVI		
	Video output	N/A		
	Audio output	Built-in	(Option)	
		Extend	N/A	
	Memory	N/A		
	Storage	N/A		
	Ethernet	N/A		
Wireless	N/A			
Touch panel	Type	PCAP	TPPC215SL01	
	Protection glass	2.7mm		
	Support OS	Windows / Linux / Android	Via USB interface	
Special Control	Manual	N/A		
	OSD	5 keys on the back		
	RS232	Yes		
	Display feedback	N/A		
Power	Power Input voltage	100-240 VAC	AC socket	
	Consumption(W)	43 (typ.)		
Mechanical	Outline (mm)	553.3 x 344.9 x 49.5 (TBD)	With brackets	
	Mounting	Ear mounting	(Option) 100x100 (mm) VESA	
	Others	N/A		
Environment	Operating temp.	-10-50 °C	with auto temperature control	
	Storage temperature	-20-60 °C		
	IP protection	N/A		
	Anti-vandal	N/A		
	Auto brightness	Yes	External light sensor cable	
	Direct sunlight	N/A		
Certification	CE/FCC			

*Specifications subject to change without notice, not responsible for typographical errors.

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

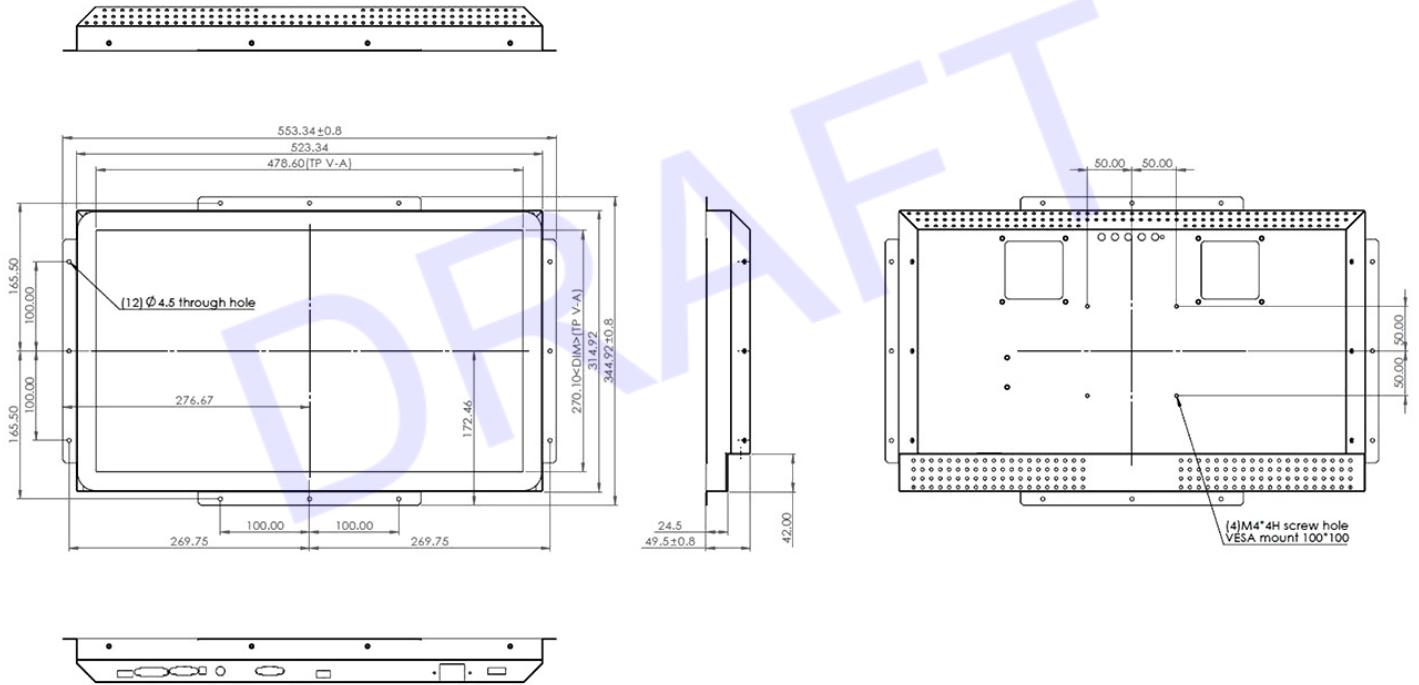

Accessories for option:

Signal Cables

Product	Description
VGA cable	M to M, 1.5 M
DVI cable	M to M, 1.8M
HDMI cable	M to M, 1.2M
USB 2.0 cable	Type A to Type A, 1.8M; for touch

Power Adapter & AC Cables

Product	Description
Power adapter	I/P:100~240V; O/P:24V (60W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:24V (90W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (40W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (60W); (US2/EU2)
Power adapter	I/P:100~240V; O/P:12V (60W); (US3/EU3)
-	-
AC cable (US)	(US3) 1.8M, US type plug
AC cable (US)	(US2) 1.5M, US type plug
AC cable (EU)	(EU3) 1.8M, EU type plug
AC cable (EU)	(EU2) 1.5M, EU type plug

Table Stand

Product	Description
Table stand (S)	203(W)*213(H)*227(D)mm/VESA75x75 mm