



**21.5" 3000nits PCT Touch Open Frame Monitor, 1920\*1080**  
 VGA/DVI/HDMI, RS232, USB(TP), Black Painted Metal Chassis, VESA Mount  
 power: 12V DC-in, Auto Brightness/temperature Control  
 Accessories: HDMI Cable\*1, 50CM Light Sensor Cable\*1  
 + AC/DC adapter, O/P:24V/3.75A , I/P:90V~264V, DC  
 PLUG:2.5\*5.5mm,EUplug type AC Power Cable included

**Model: GOPW2150HB3-V2**

## FEATURES:

- 21.5" LCD support 1920x1080 FHD resolution
- Extreme 3000 nits high brightness LCD applied.
- Multi points PCAP touch integration
- Video signal IO: VGA / HDMI / DVI
- Special 24/7 long term operation design
- OSD command remote control by RS232
- Auto brightness, auto temperature control integrated
- (option) water resistance touch function


## SPECIFICATIONS:

Function	Items	Description	Remark
Display	Display area (mm)	476.064 (H) x 267.786 (V)	21.5" 16:9 diagonal
	Brightness (nits)	3000	TFT surface
	Optimum resolution	1920 x 1080	FHD
	Contrast Ratio	1000: 1	
	View angle	178 / 178 degree	
	Backlight Life	50K hours	
Touch panel	Type	PCAP	TPPC215SL01
	Total thickness	2.7 mm	
	Support OS	Windows / Linux / Android	USB type B
Video & audio	Video input	VGA / HDMI / DVI	
	Audio	Jack-in Built-in speaker	Yes (Option)
Control	OSD	5 keys	(LED) Power/Menu/Left/Right/Auto
	RS232	Yes / D-sub (9 pin)	
	Auto brightness	Yes, External sensor cable	(option for waterproof head)
Power	Power Input voltage	DC 24V	DC jack:Φ5.5mm /φ2.5mm
	Consumption(W)	85 (typ.)	
Mechanical	Outline (mm)	549.3 x 340.7 x 53.6 (D)	With brackets
	Mounting	Ear mounting	100x100 (mm) VESA
	Weight	(TBD)	
Environment	Operating temp.	-10~50 °C	
	Storage temperature	-20~60 °C	
	Special items	Not Applied	
	Certification	CE / FCC	

*\*Specifications subject to change without notice, not responsible for typographical errors.*

# MECHANICAL DRAWINGS:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

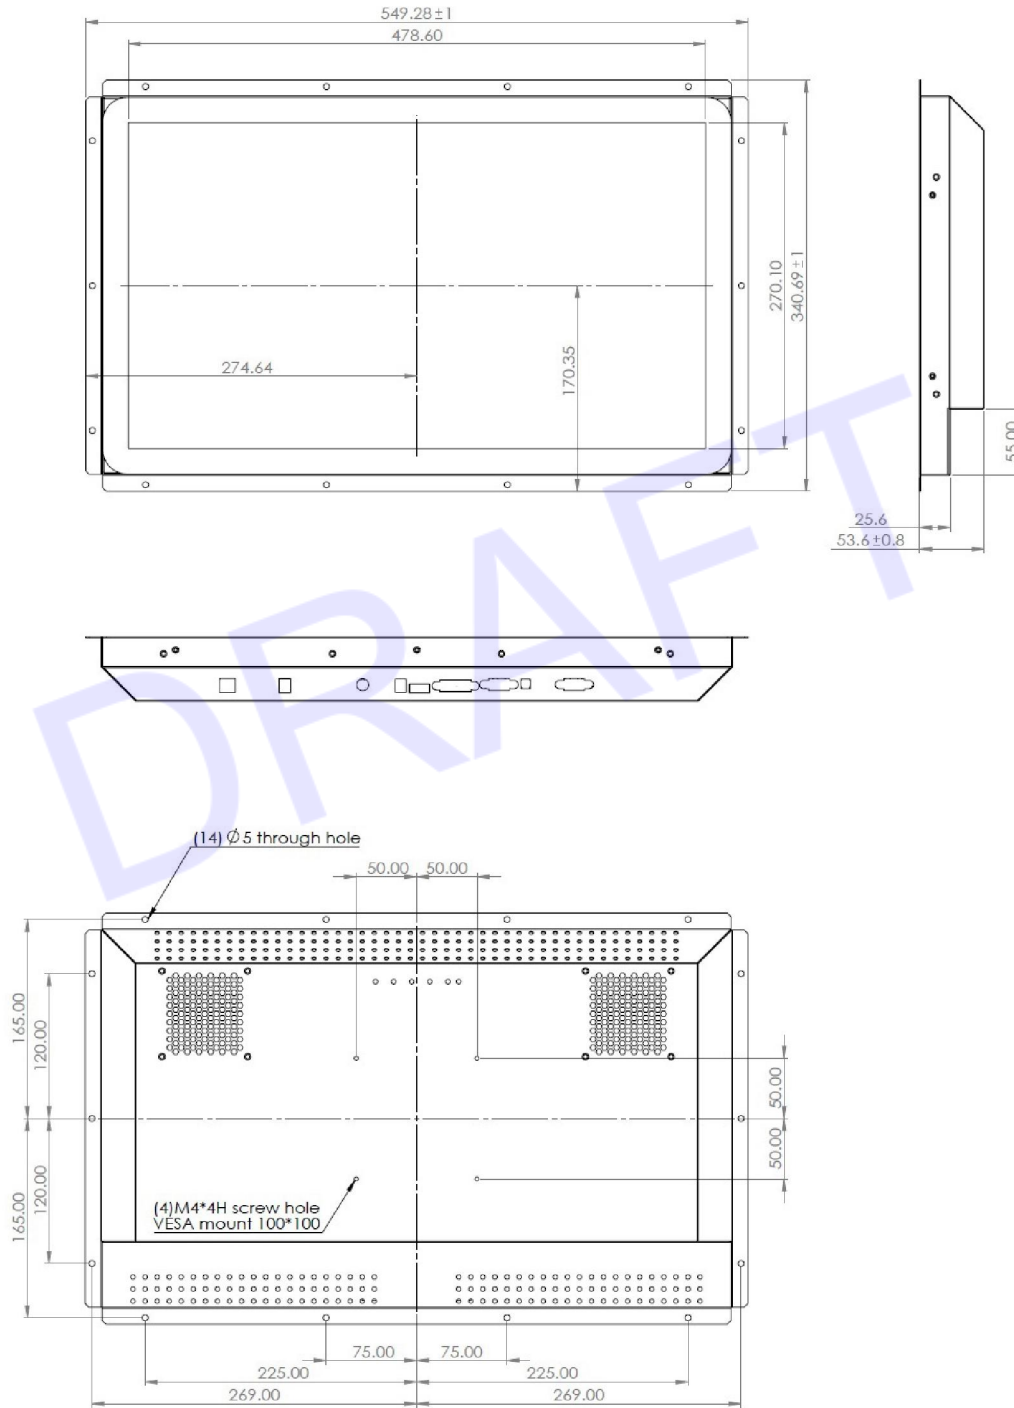

Drawing No.: GOPW2150HB3-V2-08212023-V1