



27" Open Frame Monitor with 3000nits Brightness
 1920x1080 resolution, I/O:VGA/DVI/HDMI, power: 100~240V AC-in, metal chassis with ear mount design, external sensor for brightness control accessories: VGA cable x1, AC power cable x1, light sensor cable x1

Model: GOPW2700HB3-V1

FEATURES:

- 27" LCD support FHD 1920x1080 Resolution
- 3000 nits extremely high brightness LCD applied
- Video signal IO: VGA/ HDMI / DVI
- Special 24/7 long-term operation design
- Auto temperature / brightness control
- RS232 command control port
- VESA mount / Ear mount design


SPECIFICATIONS:

Function	Items	Description	Remark	
Display	Display area (mm)	597.6 (H)x 336.15 (V)	27" diagonal	
	Brightness (nits)	3000	TFT surface	
	Optimum resolution	1920x1080		
	Contrast Ratio	3000 :1		
	View angle	178/178 degree	In all direction	
	Backlight Life	50,000 hours		
System	Video input	VGA/HDMI/DVI		
	Video output	N/A		
	Audio output	Built-in	(Option)	2Wx2
		Extend	N/A	
	Memory	N/A		
	Storage	N/A		
	Ethernet	N/A		
Wireless	N/A			
Special Control	Manual	N/A		
	OSD	5 keys on the back		
	RS232	Yes		
	Display feedback	N/A		
Power	Power Input voltage	AC 100-240 V		
	Consumption(W)	160 (typ.)		
Mechanical	Outline (mm)	616.4x364.6x53.7 (TBD)	Exclude brackets	
	Mounting	Ear mounting	200 x 200 (mm) VESA	
	Others	N/A		
Environment	Operating temp.	-10-50 °C	Auto temperature control	
	Storage temperature	-10-60 °C		
	IP protection	N/A		
	Anti-vandal	(TBD)		
	Auto brightness	Yes	External light sensor cable	
	Direct sunlight	N/A		
Certification	CE/FCC			

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

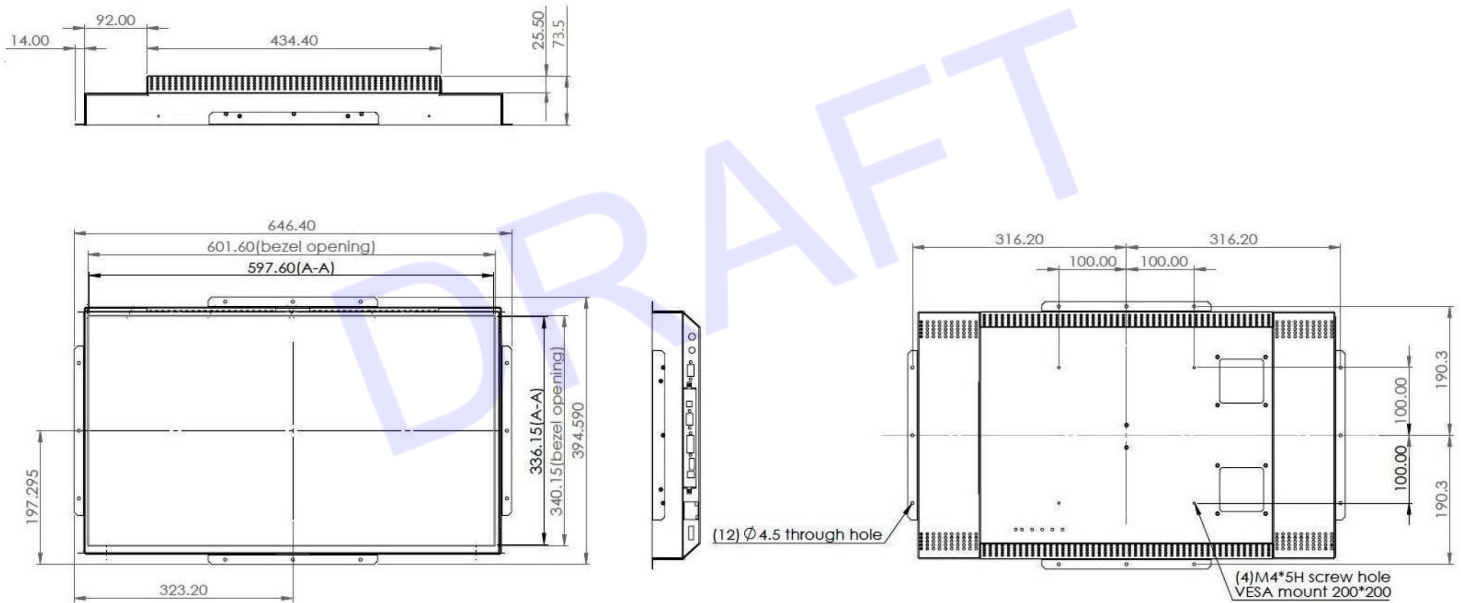

Drawing No.: GOPW2700HB3-V1-03032022-V1

ACCESSORIES

SIGNAL

Product	Description
VGA cable	M to M, 1.5 M
DVI cable	M to M, 1.8M
HDMI cable	M to M, 1.2M
USB 2.0 cable	Type A to Type A, 1.8M; for touch

POWER

Product	Description
Power adapter	I/P:100~240V; O/P:24V (60W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:24V (90W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (40W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (60W); (US2/EU2)
Power adapter	I/P:100~240V; O/P:12V (60W); (US3/EU3)
-	-
AC cable (US)	(US3) 1.8M, US type plug
AC cable (US)	(US2) 1.5M, US type plug
AC cable (EU)	(EU3) 1.8M, EU type plug
AC cable (EU)	(EU2) 1.5M, EU type plug

TABLE STAND

Product	Description
Table stand (S)	203(W)*213(H)*227(D)mm/VESA75x75 mm