



32" Open Frame Monitor with 2500nits Brightness
 1920x1080 resolution, I/O:VGA/DVI/HDMI, power: 100~240V AC-in, metal chassis with rear VESA mount and ear mount design, built-in auto temperature and brightness control accessories: VGA cable x1, light sensor cable x1

Model: GOPW3200HB3V2

FEATURES:

- 32" LCD support 1920x1080 FHD resolution
- 2500 nits high brightness
- Direct backlight with 100,000 Hrs long operation life
- 4000:1 High contrast ratio
- Extra wide 178 /178 view angle
- Video signal IO: VGA / DVI / HDMI
- Auto brightness, temperature, RS232 control
- VESA mount, detachable ear mount for easy installation



SPECIFICATIONS:

Function	Items	Description	Remark	
Display	Display area (mm)	698.4(H) x 392.85(V)	31.5" 16:9 diagonal	
	Brightness (nits)	2500		
	Optimum resolution	1920x1080		
	Contrast Ratio	4000:1		
	View angle (HA/)	178/178 degree	All direction	
	Backlight Life	100,000 hours (typ.)		
System	Video input	VGA/DVI/HDMI		
	Video output	N/A		
	Audio output	Built-in Extend	(Option) N/A	5WR/L
	Memory		N/A	
	Storage		N/A	
	Ethernet		N/A	
	Wireless		N/A	
Touch panel	Type	N/A		
	Protection glass	N/A		
	Support OS	N/A		
Special Control	Manual	(Option)		
	OSD	5 keys on the back		
	RS232	YES	OSD control	
	Display feedback	N/A		
Power	Power Input voltage	AC 100-240V		
	Consumption(W)	220 (typ.)		
Mechanical	Outline (mm)	760.0 x 453.8 x 68.7(D)	Exclude handles	
	Mounting	Ear mounting	(Option) 300x200 (mm) VESA	
	Others	N/A		
Environment	Operating temp.	-10-50 °C		
	Storage temperature	-20-60 °C		
	IP protection	N/A		
	Anti-vandal	(TBD)		
	Auto brightness	Yes	By external light sensor cable	
	Outdoor visibility enhance	(Option)		
	Direct sunlight	N/A		
	Certification	CE, FCC		

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

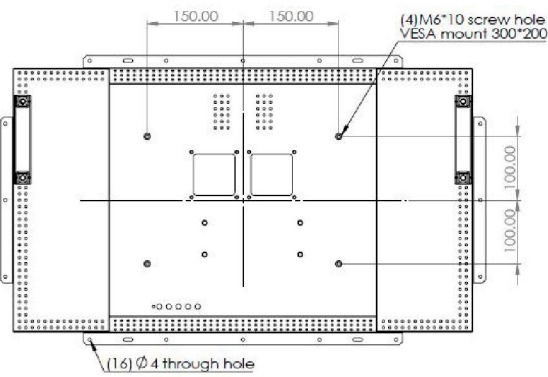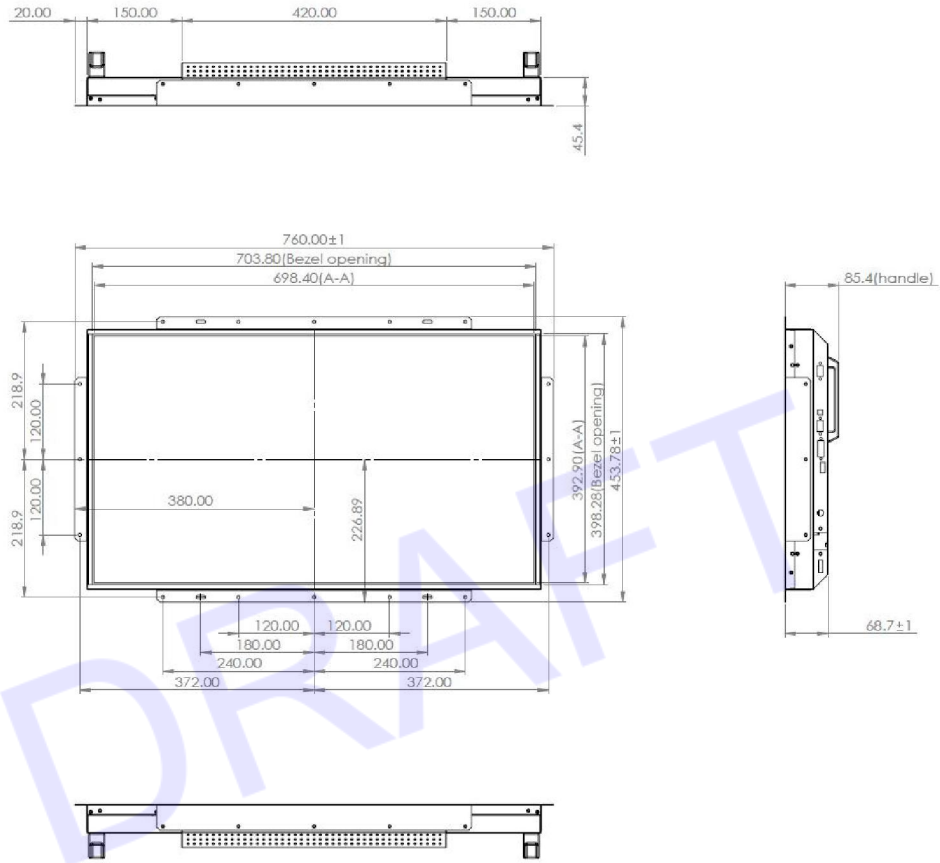

ACCESSORIES FOR OPTION:

Signal Cables

Product	Description
VGA cable	M to M, 1.5 M
DVI cable	M to M, 1.8M
HDMI cable	M to M, 1.2M
USB 2.0 cable	Type A to Type A, 1.8M; for touch

Power adapter & AC cables:

Product	Description
Power adapter	I/P:100~240V; O/P:24V (60W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:24V (90W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (40W); (US3/EU3)
Power adapter	I/P:100~240V; O/P:12V (60W); (US2/EU2)
Power adapter	I/P:100~240V; O/P:12V (60W); (US3/EU3)
-	-
AC cable (US)	(US3) 1.8M, US type plug
AC cable (US)	(US2) 1.5M, US type plug
AC cable (EU)	(EU3) 1.8M, EU type plug
AC cable (EU)	(EU2) 1.5M, EU type plug

Table Stand

Product	Description
Table stand (S)	203(W)*213(H)*227(D)mm/ VESA 75x75 mm