

MODEL: ACHW07HB-PCAP

FEATURES:

- 7" WVGA FPD Industrial LCD / 1000 nits HB (LCD supports -30~85°C)
- Projected Capacitive Touch (USB)
- VGA / DVI / DP / HDMI Inputs
- 5-Key Rear OSD
- DC 9~36V Power Input
- Aluminum Die-Cast Chassis
- Operating Temperature: 0~50°C
- Storage Temperature: -30~70°C
- Humidity: 10~95% @ 40°C, Non-Condensing
- CE / FCC Class A Certified

SPECIFICATION:


I/O PORT	
VGA	1 x VGA
DVI	1 x DVI-D (share with HDMI)
DP	1 x DP
HDMI	1 x HDMI (share with DVI-D)
Audio	1 x Audio line-in phone jack
OSD Control Membrane	OSD at rear side
Power	1 x 3-pin terminal block for DC 9~36V power input
Others	1 x USB type B for touch control
DISPLAY	
Display Type	7" TFT-LCD
Max. Resolution	800 x 480
Max. Color	262K
Luminance (cd/m2)	1000
Contrast	1000:1
Backlight Lifetime	30,000 hrs
TOUCH SCREEN	
Type	Projected Capacitive Touch
Interface	USB
Light Transmission(%)	over 90%

MECHANICAL	
Construction	Aluminum Die-casting Chassis
Mounting	Panel Mount / VESA Mount 75 x 75
IP Rating	IP66 Compliant Front Panel
Dimensions	202 x 149 x 40 mm
Net Weight	1.06 kg
ENVIRONMENTAL	
Operating Temperature	0~50°C
Storage Temperature	-30~70°C
Certificate	CE/FCC, Class A

Specifications subject to change without notice, not responsible for typographical errors.

DIMENSION:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

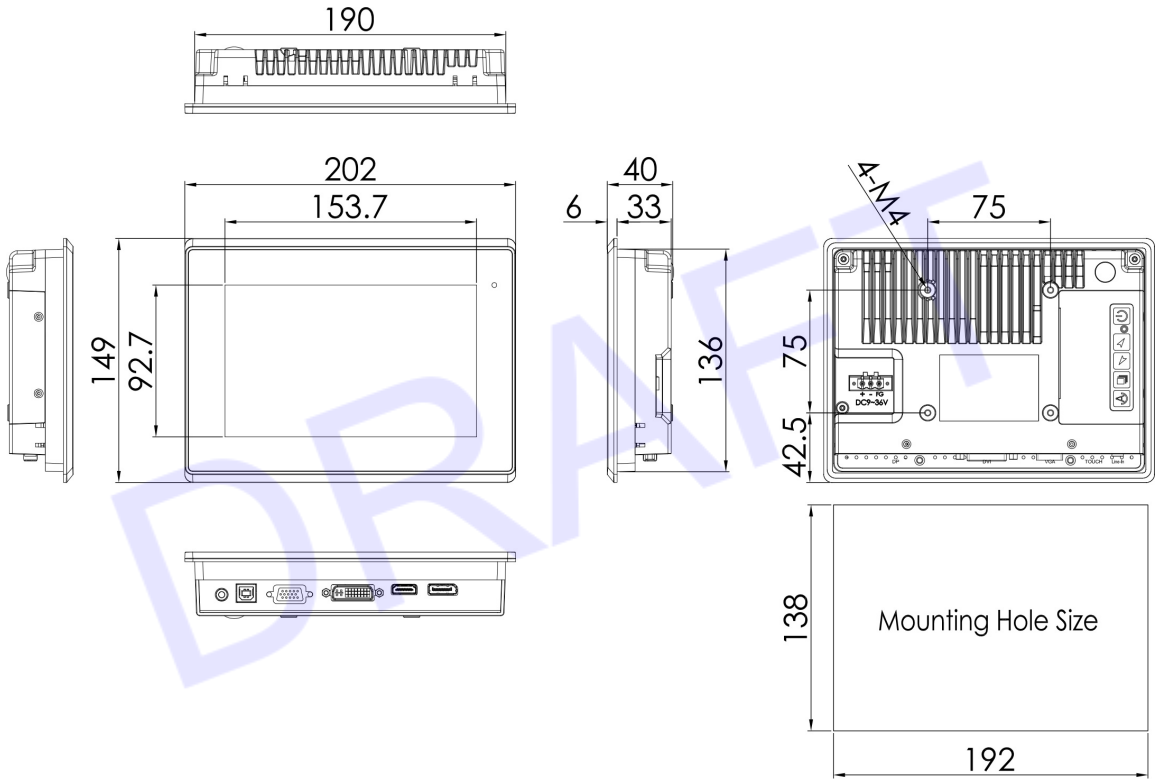

DRAFT

Drawing No.: ACHW07HB-PCAP-10202026-V1