

SUNLIGHT READABLE FRONT IP65 MARINE BRIDGE DISPLAY MONITOR



Front IP65 12.1" Marine Bridge Display Monitor 1027x768 1000nits, HDMI, DVI-D VGA, Composite Video Audio Input, IEC60945 Certificated Front Hyper Dimming Knob Control Backlight Brightness from Nearly 0%-100% Internal Power Adapter , 100-240V AC Input

MODEL: AMAR1210HB

FEATURES:

- Front hyper dimming knob control backlight brightness from nearly 0%-100%.
- Rugged construction, Front bezel NEMA4 / IP65 compliant.
- Front hardness glass protects screen (AR glass & touch for optional).
- Front OSD control buttons to optimized display.
- Standard with HDMI, DVI, VGA, Composite Video, Audio input.
- Build in two stereo speakers.
- Panel (Flush) mount with clips.
- Meet standard VESA mount and optional robust mounting bracket.
- IEC60945 certificated.

SPECIFICATION:

TFT Characteristics:	
Screen Size	12.1-inch TFT LCD
Backlight Type	LED
Resolution	1024 x 768
Contrast Ratio	1000:1
Brightness (cd/m2)	500 (1000 nits for option)
View Angles (H/V)	178/178
Max. Color	16.2M

Input Signals:	
HDMI Signal	HDMI (Female)
DVI Signal	DVI-D (Female)
VGA Signal	D-SUB 15P connector (Female)
Composite Video	RCA Phono plug
Audio	3.5" jack
AC Power Input	Standard IEC Inlet
DC Power Input (option)	Screw Terminal Block
Touch Screen (option)	USB-A connector (Female)

User Controls:	
Power On/Off via front buttons	
VR Brightness Knob adjustment	
Power Mode Status LED indicator	
On Screen Display control(OSD)	

Power Specifications:	
AC Power Input	Standard IEC Type power cord with Internal Power Adapter , 100-240V AC Input
DC Power Input (option)	Screw Type Terminal Block with internal 9~36V wide DC power module


Mechanical and Environmental:	
IP Protect	Front IP65 Grade
Mounting	Panel (Flush) Mount
Construction	Aluminum Front Bezel + Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% (non -condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension (WxHxD)	320 x 258.5 x 63 mm
Packing Dimension (WxHxD)	450 x 380 x 200mm <i>estimated</i>
Net Weight / Gross Weight	6 / 10 KG <i>estimated</i>
Certification and Approvals	IEC60945

**Specifications subject to change without notice, not responsible for typographical errors.*

SUNLIGHT READABLE FRONT IP65 MARINE BRIDGE DISPLAY MONITOR

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

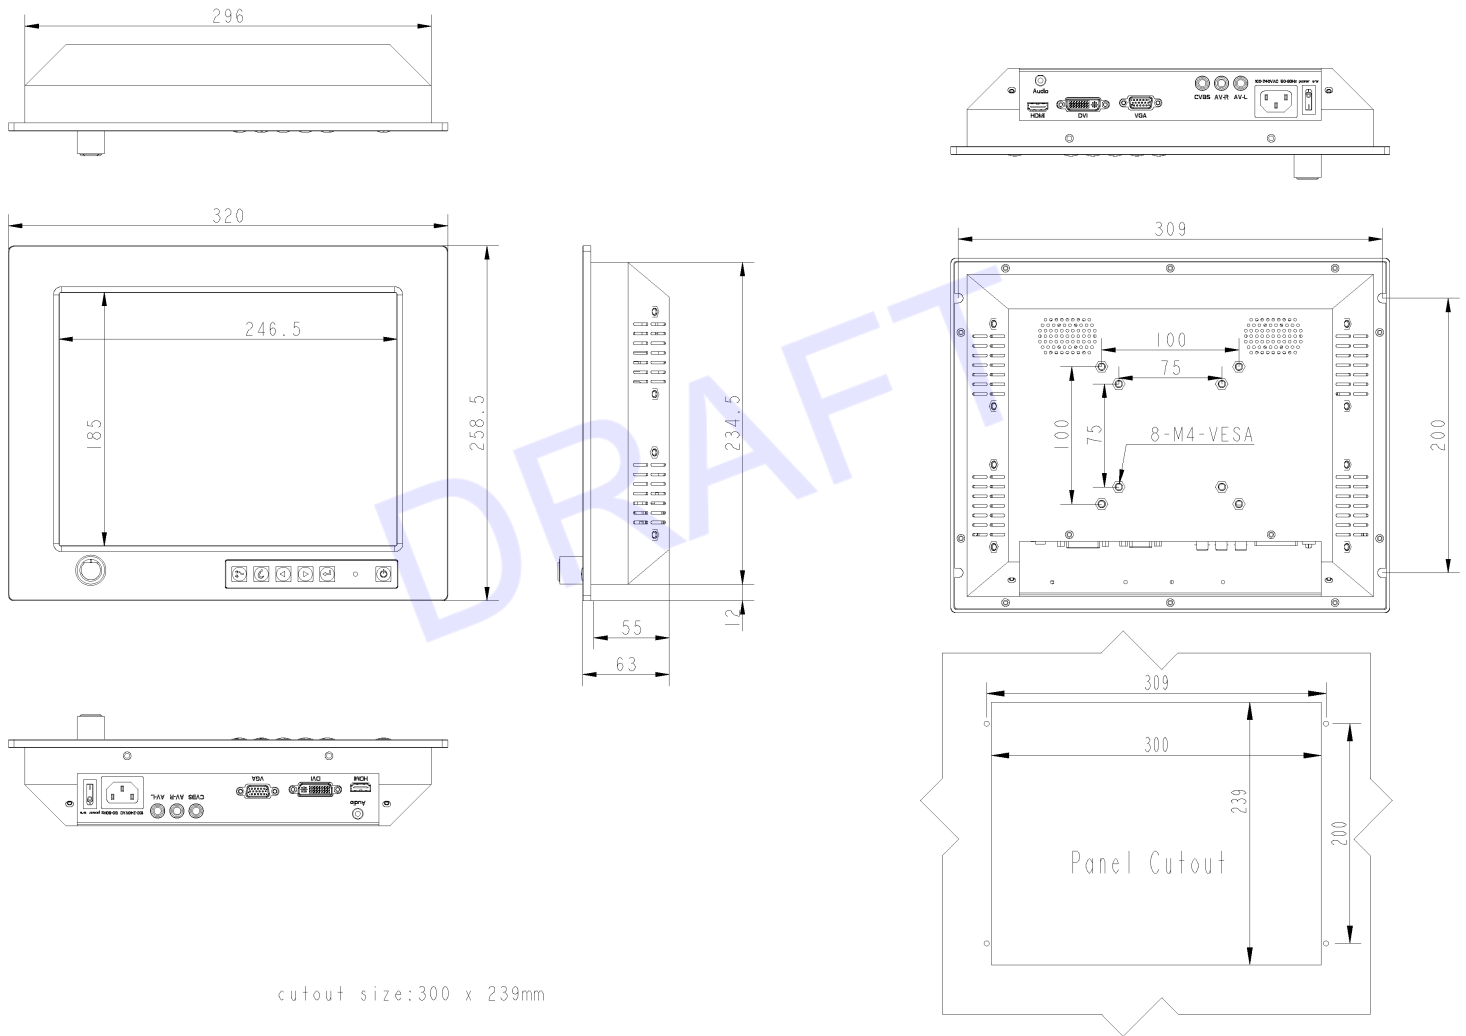

cutout size:300 x 239mm

Drawing no.: AMAR1210HB-10132023-V1