


PANEL MOUNT MONITOR

23.8" Front IP65 Panel Mount Monitor, 1920 x 1080, 250 nits, VGA+DVI+HDMI, Front OSD, with 10 point PCT touch (USB controller for Win 10), internal power supply, 100~240VAC, 50~60Hz

Model: APMW2400IP-PCT10

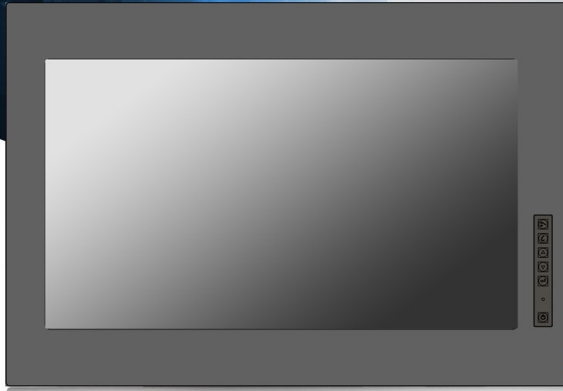

FEATURES:

- 6mm aluminum front bezel with hardness glass protect screen
- 23.8 inch wide screen 1920 x 1080 WUXGA Ultra high resolution
- Support FHD with 1080p resolution
- DVI-D, VGA, Audio input
- Front bezel NEMA4 / IP65 compliant
- Front osd control buttons to optimized display
- Build in 2x 2watts stereo speakers
- Panel (Flush) mount with clips
- Meet standard VESA hole, support desk stand / wall mount / Swing Arm mounting

OPTION:

- Composite video input
- BNC Loop-in-out
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

SPECIFICATIONS

| LCD CHARACTERISTICS | |
|-----------------------|----------------------|
| Screen Size | 23.8 inch widescreen |
| Backlight Type | LED |
| Resolution | 1920x1080 |
| Contrast Ratio | 1000:1 |
| Brightness (cd/m2) | 250 |
| View Angles (H/V) | 178/178 |
| Pixel Size (HxV) mm | 0.2745x0.2745 |
| Max. Color | 16.7M |
| MTBF (Hrs.) | 50,000 |

| INPUT SIGNALS | |
|------------------------|--------------------------------|
| DVI-D | DVI-D 24Pin Connector (Female) |
| VGA | D-SUB 15Pin Connector (Female) |
| Audio | 3.5" Jack |
| Power Input | 12V DC jack with hanger |
| Touch-USB (option) | USB A Type connector |
| Touch-RS232 (option) | D-SUB 9P connector (Female) |

| POWER SPECIFICATIONS | |
|-------------------------------------|--|
| AC Power Input | External Power Adapter , 100-240V AC Input |
| Wide Range DC PowerInput (option) | Screw Type Terminal Block with internal wide Range DC 9-36V power module |


| USER CONTROL INTERFACE | |
|-----------------------------------|--|
| Power ON / OFF via Front Button | |
| Power Mode Status LED indicator | |
| OSD (On Screen Display) Buttons | |

| MECHANICAL AND ENVIRONMENT | |
|-----------------------------|--|
| IP Protect | Front IP65 Grade |
| Mounting | Panel (Flush) Mount with clips, VESA |
| Construction | Aluminum Front Bezel + Metal |
| Operating Temperature | 0 - 50 deg. C |
| Operating Humidity | 5% - 95% (non -condensing) |
| Anti-Vibration | 5 - 500 Hz / 1 Grms PTP |
| Anti-Shock | 15G / Peak (11 ms) |
| Physical Dimension (WxHxD) | 575 x 380 x 57 (mm) |
| Packing Dimension (WxHxD) | 710 x 510 x 200 (mm) |
| Net Weight / Gross Weight | 12 / 14.5 (KGs) |
| Certification and Approvals | CE / FCC / RoHs |

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICALDRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

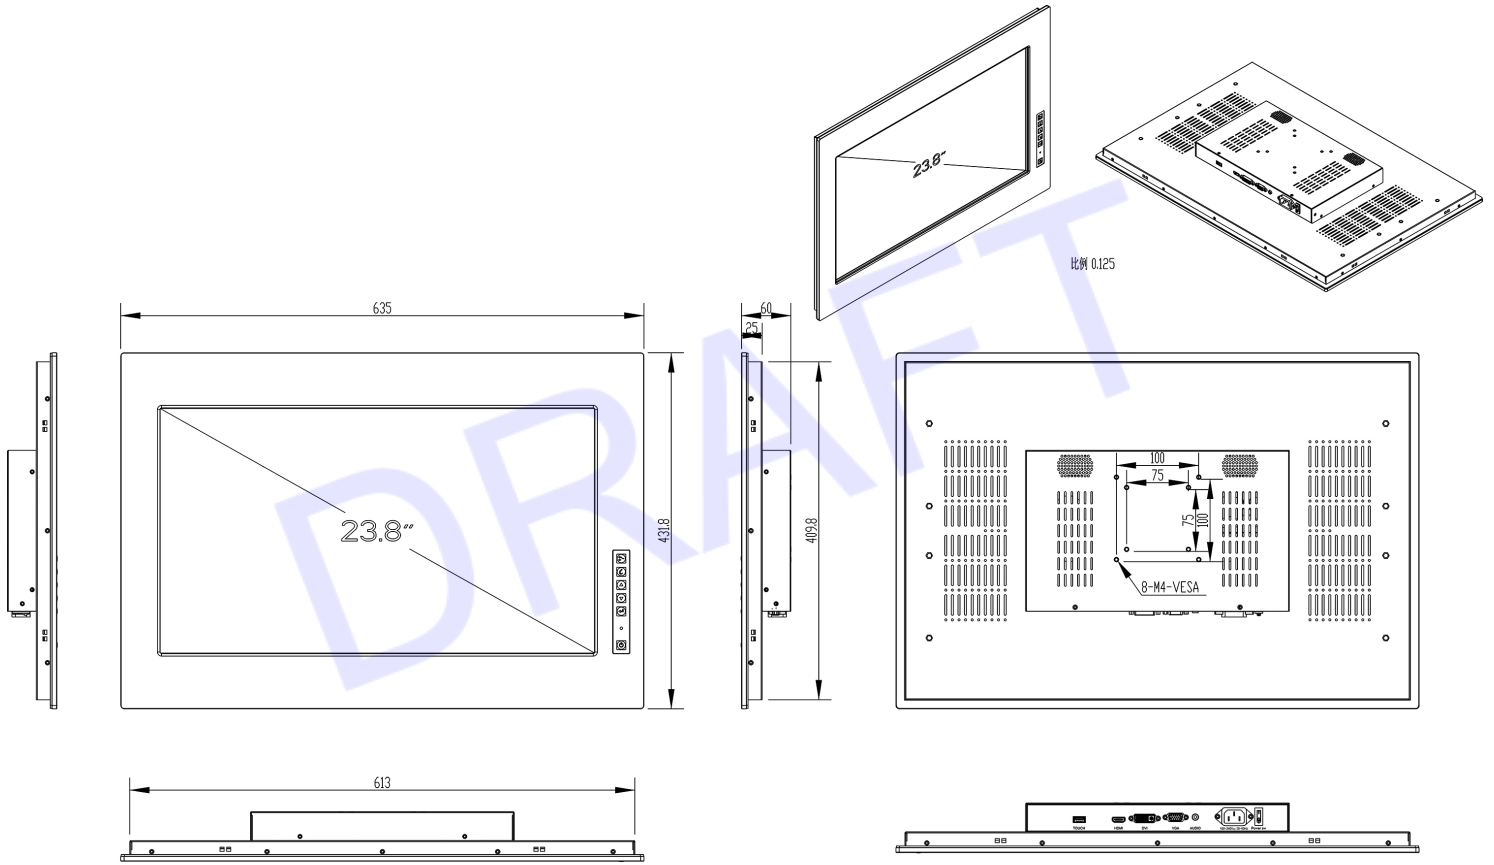

Panel Mounting cut size : 615*412 mm

Drawing No.: APMW2400IP-PCT10-03292022-V1