

All in one PC Widescreen Display


Chassis Mount, 42" LCD Monitor, 1920x1080, 380nits, GIGABYTE Mother Board Mother - GiGAI PC iTXL-5105A, Celeron N5105 Processor up to 2.9GH,z16GB ddr4 2666 Mhz Memory, 1TB SSD of Storage.
+ IR Touch 10 points Touch screen 4mm Optical Glass

PC SWOP Features.
Included Low profile Wall Mount Bracket.
(With speaker + wall mount + DVI to HDMI cable + ear cable)

Model: BCPCW4200HD-XL-OT




FEATURES:

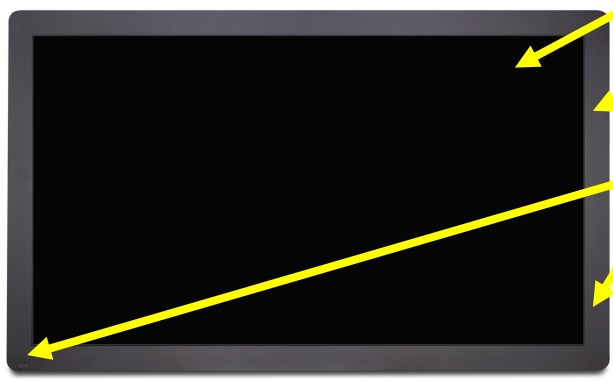

- Optical Multi Touch Provide Best Clarity of image with Protective Front Glass
- Metal Chassis Housing with built in speakers
- IR Remote Sensor
- Auto Power On/Off and Auto Signal On/Off

BCPC Series All in one PC with/ without IR 6 Points-Touch Widescreen Display Chassis Mount LCD Monitor (SWOP PC Tray)

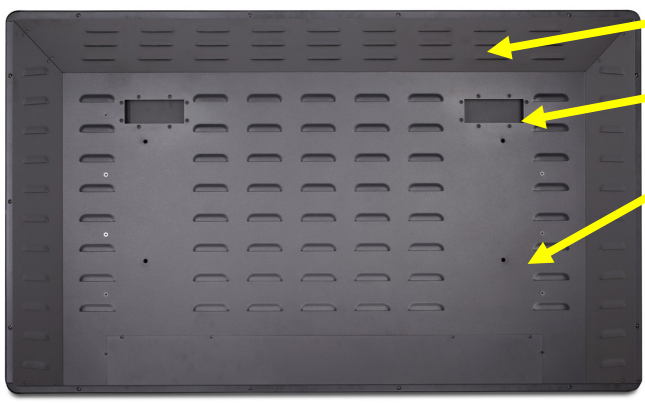


- Perforated rear Cover provide ample ventilation
- Recess handle can easily handle and install (42" and above)
- VESA Mount for Surface Mount



- SWOP PC Tray for easy service and upgrade hard drive.
- Large Handle for Easy Grip

OSD:
Power/Menu/Auto/Left/Right


Main Power On/Off Switch

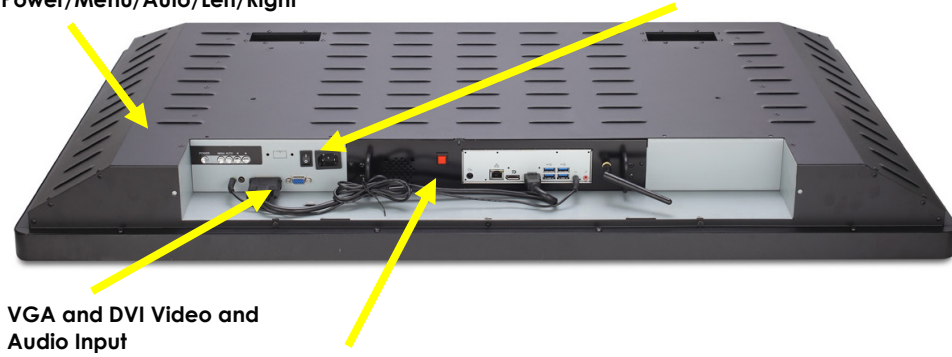

VGA and DVI Video and Audio Input

PC Reset Button

Included Low Profile Wallmount Bracket

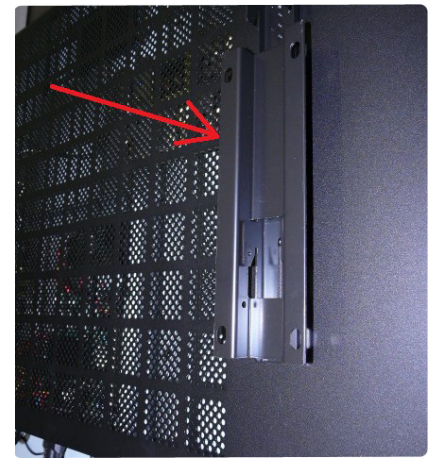

LCD SPECIFICATIONS	
Viewable Size Image	42" (16:9)
Active Display Area(mm)	930.24(H) x 523.26(V)
Number of Pixels	1920 x 1080
Contrast Ratio	3000 : 1
Display Color	16.7 million
Brightness(cd/m)	380
Viewing Angle	R/L178° x U/D178°
Recommended Resolution	1920 x 1080
Response time	6.5 ms
Life time	30,000/hr
Signal Input	1 x VGA, 1 x DVI
Signal Output	2 x HDMI

MECHANICAL	
Operating Temp.	0°~50°C
Humidity	20~80% RH
Store Temp.	-20°~55°C
Dimensions(mm)	1012(L)x606(W)x117(D)
Wall Mount(LxW/mm)	600(L) x 200(W)
Color	Black

ACCESSORIES	
DVI TO HDMI Wire x 1	
3.5" Audio Wire x 1	
Power Core x 1	

POWER	
Power Input	Support panels of flat type for LCD.
Power Consumption	85W


SYSTEM SPECIFICATIONS	
CPU	Intel® Core™ Celeron N 5105
Mother Board	iTXL-5105A
RAM	16GB DDR4 2666 Mhz
Storage	1TB SSD
USB Port	6 x USB 2.0 Port
PC Audio output	Realtek ALC897 audio codec
Speaker Output	2 x 5 w internal speaker
LAN Port	2 x RJ-45 10/100/1000 (Mbit)
WIFI	IEEE 802.11b/g/n (option)
Touch Screen	IR Touch 10 points Touch screen 4mm Optical Glass

INFRATED TOUCH (Options)	
Windows 11 and MAC OS X, Linux, Android etc. Support panels of flat type for LCD.	
Touch Points	2, 4, 6, 10, 16, 20 points touch. (Options)
Operating Temp.	-20°C ~ 60°C.
Operating Hum.	10%~90% RH
Storage Temp.	-40°C ~ 85°C
Touch Activation Force	No pressure required.
Touch Accuracy	± 2mm on more than 95% touch area.
Response time	First click<16ms, Repeated click<6ms.
Light-proof Capacity	Resisting lights from all angles
Input Method	Fingers, stylus, gloves or any other opaque material medium.
Hohs' hardness rating	7
Break Resistance	3mm Heat Tempered Glass. Meets UL-1950 Steel Ball Drop Test.
Light Transmission >92%.	(per ASTM D1003)

*Specifications subject to change without notice, not responsible for typographical errors.

MECHANICAL DRAWINGS

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

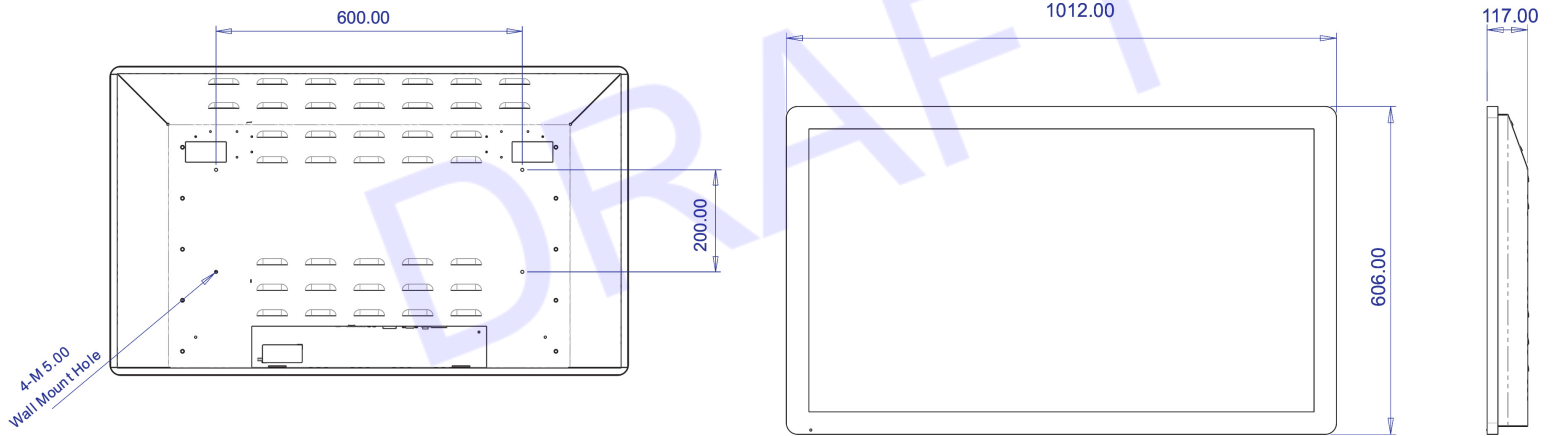

Drawing No.: BCPCW4200HD-XL-OT-02012023-V1

COVER I/O PLATE

