

VESA MOUNT STAINLESS STEEL ENCLOSURE FULL IP65

15" Industrial Panel LCD 1024x768, 1500nits, Temp.: 0C to 50C, Stainless Steel Enclosure with Full IP66 / VESA mount, AR Glass / Light Sensor Front OSD with Power ON/OFF function and Brightness " +/- " adjustment directly, I/O (all connectors are waterproof connectors / 6ft long): VGA and 12VDC with external 100-240VAC power adapter



MODEL: CCH1500HB2-SIP

USB INPUT IS OPTIONAL FOR TOUCHSCREEN

FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to XGA (1024x768)
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance
- Full IP65
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment

SPECIFICATIONS:

| | | |
|------------------|--------------------------|---|
| Display | Viewing Size Image | 15" |
| | Active Display Area (mm) | 306 (H) x 230 (V) |
| | Pixel Pitch (mm) | 0.297 (H) x 0.297(V) |
| | Resolution | 1024 x 768 |
| | Contrast Ratio | 700 : 1 (typ.) |
| | Color | 16.2M(6bits+FRC) |
| | Brightness | 1500 cd/m ² |
| | Viewing Angle | -70~70 (H) ; -60~60 (V) |
| | Recommended Resolution | 1024 x 768 @ 60H, 75Hz |
| Signal Connector | VGA | |
| Power | Source | 12V DC in,with External AC-DC Adapter(100-240V) |
| | Consumption | 25W typical, normal operation |
| | Management | VESA DPMS Compliant |
| Optional | Touch | Resistive, PCAP |
| | High Brightness | 1000,1500 |
| | Auto Dimming | YES |
| | POWER in | DC24V,DC 9V~36V |
| | Remote Control | YES |
| | IO | AV,HDMI,DP |

*Specifications subject to change without notice, not responsible for typographical errors.


IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input
(Option)

MECHANICAL DRAWING

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

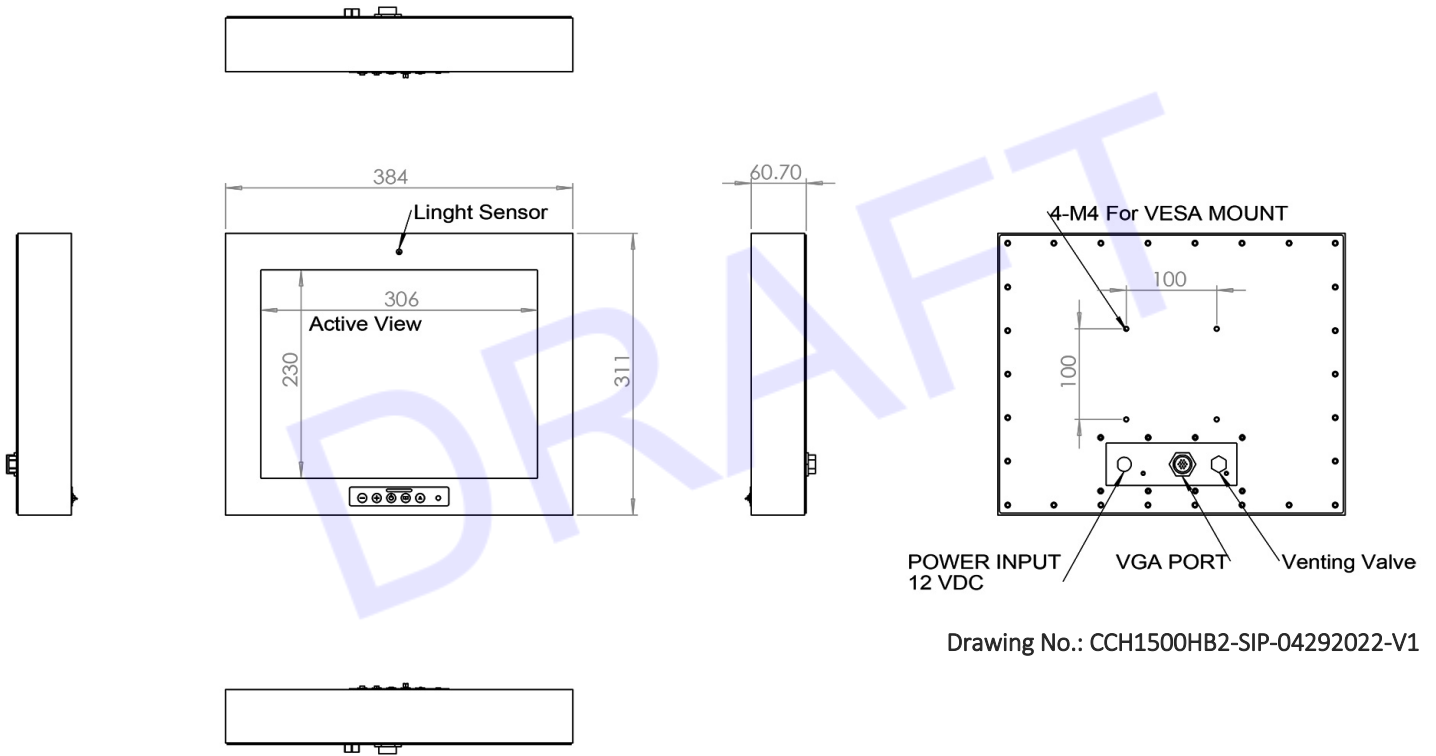

Drawing No.: CCH1500HB2-SIP-04292022-V1