

FULL IP66/NEMA4X STAINLESS STEEL LCD MONITOR

21.5" High Brightness Industrial Panel (AUO_P215HAN02.0),
1920x1080 / 1000nits (with High Tni Liquid Crystal) with VGA,
DVI, Vent Valve and 100-240VAC Power Cord with Sun Hood

MODEL: CCHW2150HB-SIP-SH



FEATURES:

- 21.5" Industrial Panel (AUO_P215HAN02.0) / 1920 x 1080 / 1000nits (with High Tni liquid crystal)
- Working Temp. : 0C to 50C
- Stainless 304 Enclosures / Wall mount
- AR Glass / Front OSD Brightness Adjustment Directly
- I/O (all connectors are waterproof connectors / 6ft long) : VGA, DVI, vent valve and 100-240VAC power cord
- Sun Hood

SPECIFICATIONS:

Display	Viewing Size Image	21.5"
	Active Display Area (mm)	479 (H) x 270.50 (V)
	Pixel Pitch (mm)	0.248 x 0.248
	Resolution	1920 x 1080
	Contrast Ratio	5000 : 1 (typ.)
	Color	16.7M
	Brightness	1000nits
	Viewing Angle	-89~89 (H) ; -89~89(V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI
Power	Source	100-240VAC
	Consumption	38W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC 9V~36V
	Remote Control	YES
	IO	AV,HDMI,DP

**Specifications subject to change without notice, not responsible for typographical errors.*

IP65 Waterproof connectors:




VGA Input DVI Input USB Input Power Input

(Option)

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

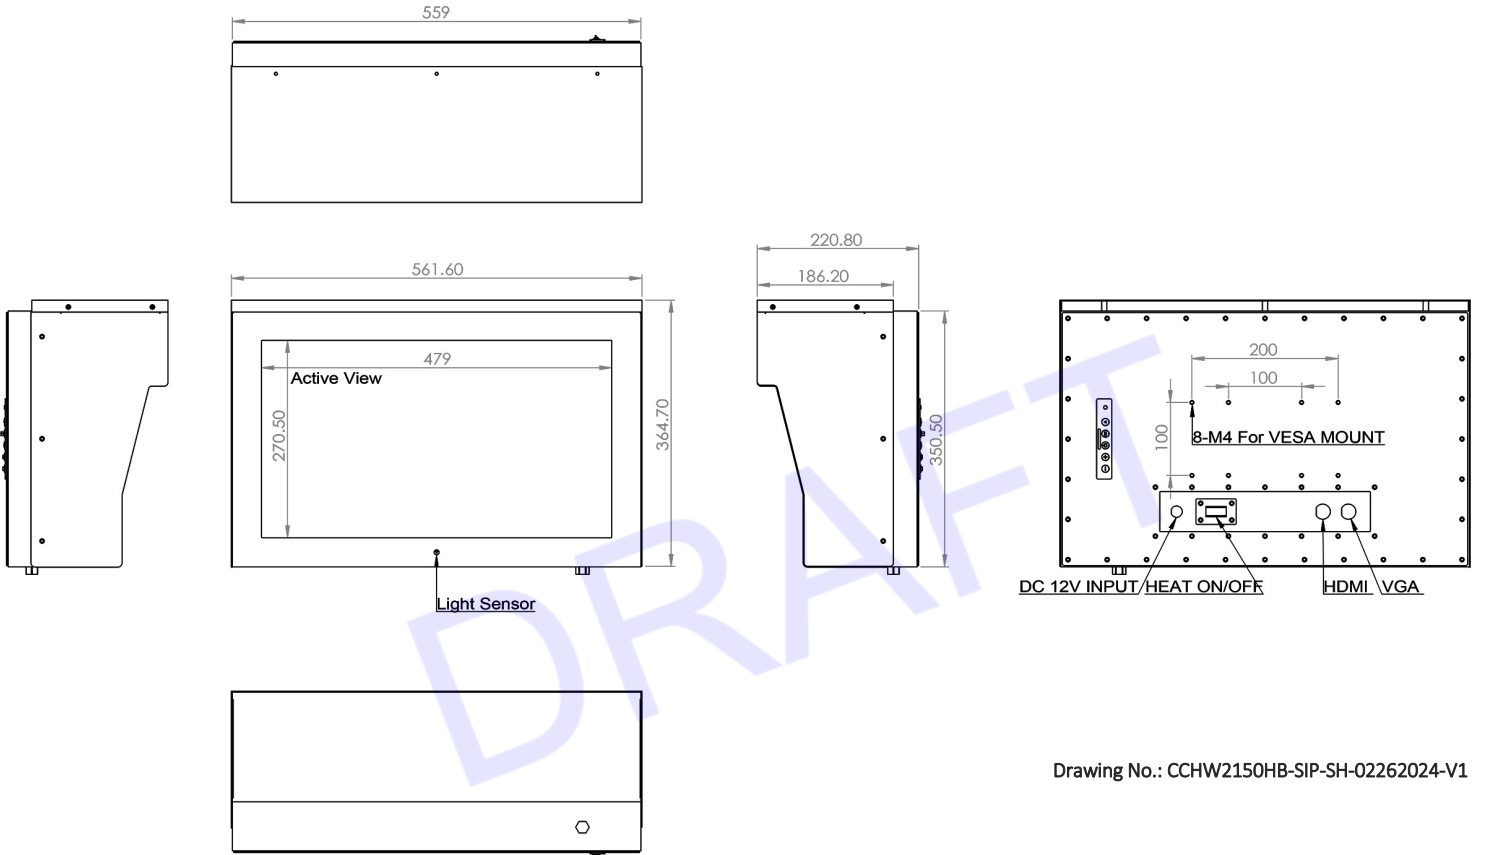

Drawing No.: CCHW2150HB-SIP-SH-02262024-V1

