

**RUGGED COMPLETELY SEALED FULL IP65/NEMA4X
STAINLESS STEEL CHASSIS/SURFACE MOUNT**



Fully Sealed IP65 32" Wide LCD Monitor, 1920 x 1080, 400 nits, 178/178, Operating Temp 0-50C, VGA and DVI input with 10 points Projective Capacitive Touch (1-2mm) USB Controller, Internal power supply 90~240VAC input

Model: CCHW3200-SIP-PCT

FEATURES:

- High Contrast color LCD Monitor with resolution up to FULL HD (1920x1080)
- Completely Sealed FULL IP65/NEMA4X
- High Shock & Vibration Resistance
- Widely Application: Automation, Medical, Tourist, Transportation

SPECIFICATIONS:

Display	Viewing Size Image	32"
	Active Display Area (mm)	701.80 (H) x 396.40 (V)
	Pixel Pitch (mm)	0.3638(H)x 0.3638(V)
	Resolution	1920 x 1080
	Contrast Ratio	3000: 1 (typ.)
	Color	16.7 M(8bits+colors)
	Brightness	400 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA+DVI
Power	Source	90 ~ 240VAC
	Consumption	75W typical, normal operation
	Management	VESA DPMS Compliant
	Operating Temp	0°C ~ 50°C
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV,HDMI,DP


**Specifications subject to change without notice, not responsible for typographical errors.*

APPLICATIONS:



MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

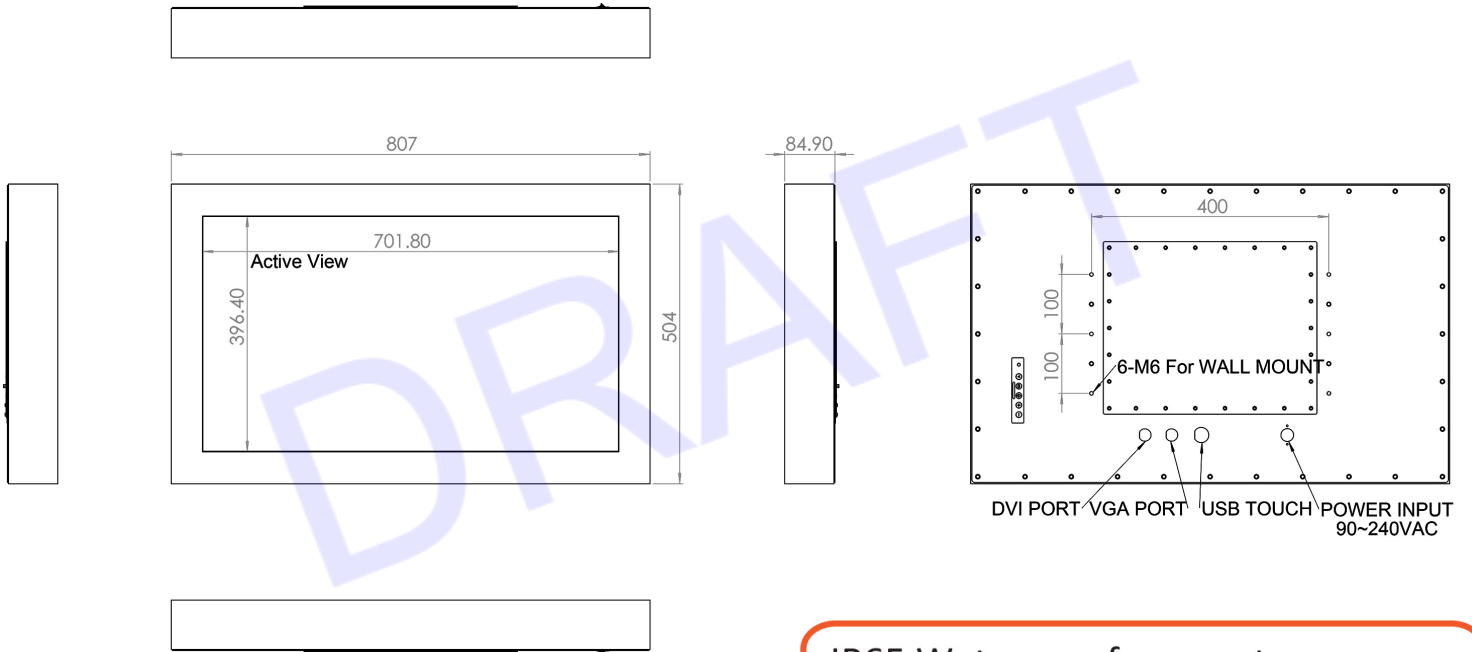

IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input

(Option)