


**RUGGED COMPLETELY SEALED FULL IP66/NEMA4X  
STAINLESS STEEL CHASSIS/SURFACE MOUNT**

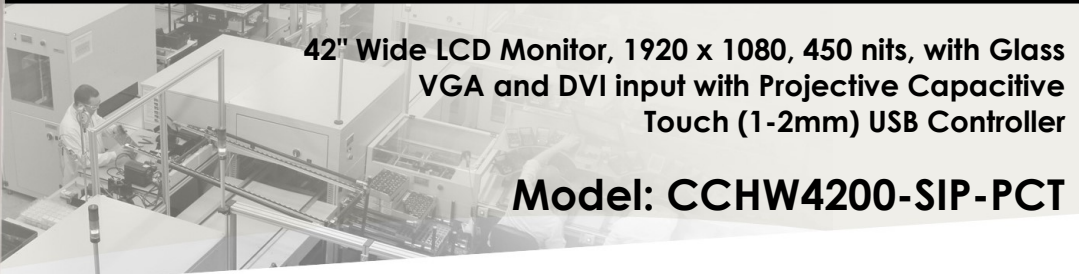

**42" Wide LCD Monitor, 1920 x 1080, 450 nits, with Glass  
VGA and DVI input with Projective Capacitive  
Touch (1-2mm) USB Controller**

**Model: CCHW4200-SIP-PCT**

**FEATURES:**

- High Contrast color LCD Monitor with resolution up to FULL HD (1920x1080)
- Completely Sealed FULL IP66/NEMA4X
- High Shock & Vibration Resistance
- Widely Application: Automation, Medical, Tourist, Transportation


**SPECIFICATIONS:**

<b>Display</b>	Viewing Size Image	42"
	Active Display Area (mm)	930.25 (H) x 523.01 (V)
	Pixel Pitch (mm)	0.4845(H)x 0.4845(V)
	Resolution	1920 x 1080
	Contrast Ratio	4000:1 (typ.)
	Color	16.7 M(8bits+colors)
	Brightness	450 cd/m <sup>2</sup>
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI
<b>Power</b>	Source	AC100V~AC240V
	Consumption	110W typical, normal operation
	Management	VESA DPMS Compliant
<b>Optional</b>	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV,HDMI,DP

**APPLICATIONS:**



## MECHANICAL DRAWING:

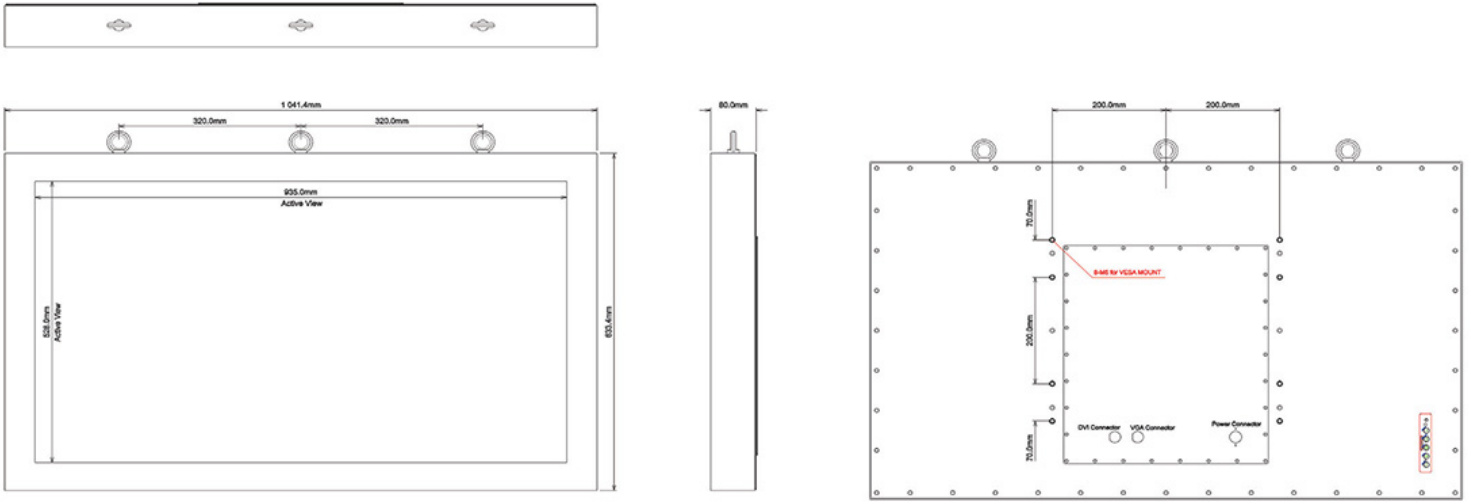

### IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input  
(Option)