

# RUGGED COMPLETELY SEALED FULL IP66/NEMA4X STAINLESS STEEL

High Brightness Chassis/Surface Mount, 43" Brightness 1000nits based on Default 3 set Waterproof Connectors & Cables: DVI, VGA, HDMI & Power 6ft long only with external 100~240V AC + Adapter Wide Temp 0 to 50C Operating Temp

Remark: This unit designed to be installed under completed shaded area without direct sunlight. Not facing east and west



## MODEL: CCHW4300HB-SIP-H

USB INPUT IS OPTIONAL FOR TOUCHSCREEN

### FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to Full HD (1920x 1080 )
- Widely used in chemical industry, food industry, medical devices, appliances etc. with good corrosion resistance
- Full IP66 Stainless Design
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment

### SPECIFICATIONS:

Display	Viewing Size Image	43"
	Active Display Area (mm)	935 (H) x 528 (V)
	Pixel Pitch (mm)	0.4902(H)x 0.4902(V)
	Resolution	1920x1080
	Contrast Ratio	1100:1 (typ.)
	Color	16.7 M
	Brightness	1000 cd/m
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA, DVI, HDMI

Power	Source	100V~240VAC power cord
	Consumption	49.28W typical, normal operation
	Management	VESA DPMS Compliant
	Touch	Optional
Optional	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV, DP

\*Specifications subject to change without notice, not responsible for typographical errors.


#### IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input  
(Option)

## MECHANICAL DRAWING:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

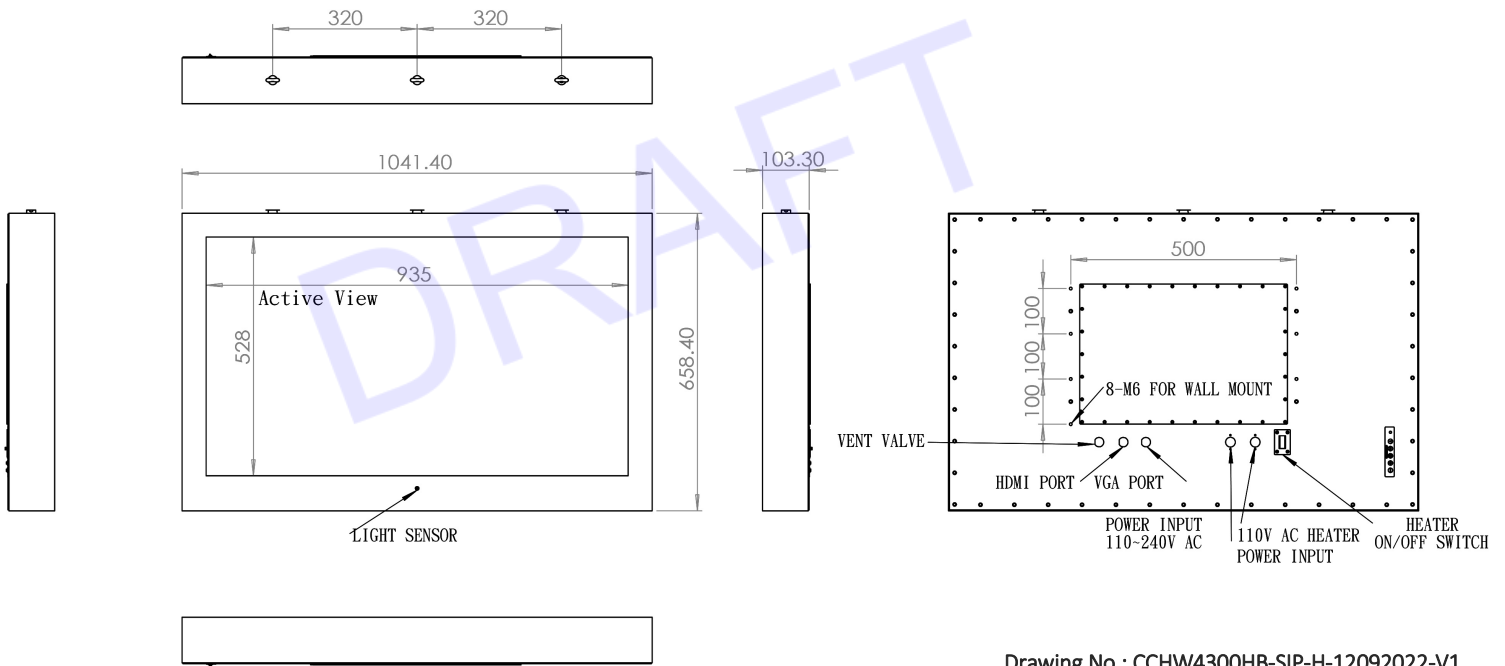

Drawing No.: CCHW4300HB-SIP-H-12092022-V1