

SUNLIGHT READABLE RUGGED COMPLETELY SEALED FULL IP66/NEMA4X STAINLESS STEEL

High Brightness Chassis/Surface Mount, 43" Brightness 2500nits based on Default 3 set Waterproof connectors & cables: DVI,VGA,HDMI & Power 6ft long only with external 100~240V AC + Adapter
Wide Temp 0 to 50C Operating Temp

Remark: This unit designed to be installed under completed shaded area without direct sunlight. Not facing east and west



MODEL: CCHW4300HB2-SIP

USB INPUT IS OPTIONAL FOR TOUCHSCREEN

FEATURES:

- High Contrast TFT LCD Monitor with support for Full HD resolution (1920x1080).
- Widely employed in various industries such as chemical, food, medical devices, and appliances, offering excellent corrosion resistance.
- Complete with a Full IP66 Stainless Design.
- Equipped with a Universal Power adapter.
- Features DDC1 & DDC2B support for Plug & Play compatibility.
- Advanced OSD control enables precise adjustment of picture quality.

SPECIFICATIONS:

Display	Viewing Size Image	43"
	Active Display Area (mm)	935 (H) x 528 (V)
	Pixel Pitch (mm)	0.4902(H)x 0.4902(V)
	Resolution	1920x1080
	Contrast Ratio	1100:1 (typ.)
	Color	16.7 M
	Brightness	2500 cd/m
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
Signal Connector	VGA, DVI, HDMI	
Power	Source	100V~240VAC power cord
	Consumption	49.28W typical, normal operation
	Management	VESA DPMS Compliant
	Touch	Optional
Optional	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV, DP

*Specifications subject to change without notice, not responsible for typographical errors.


IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input
(Option)

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

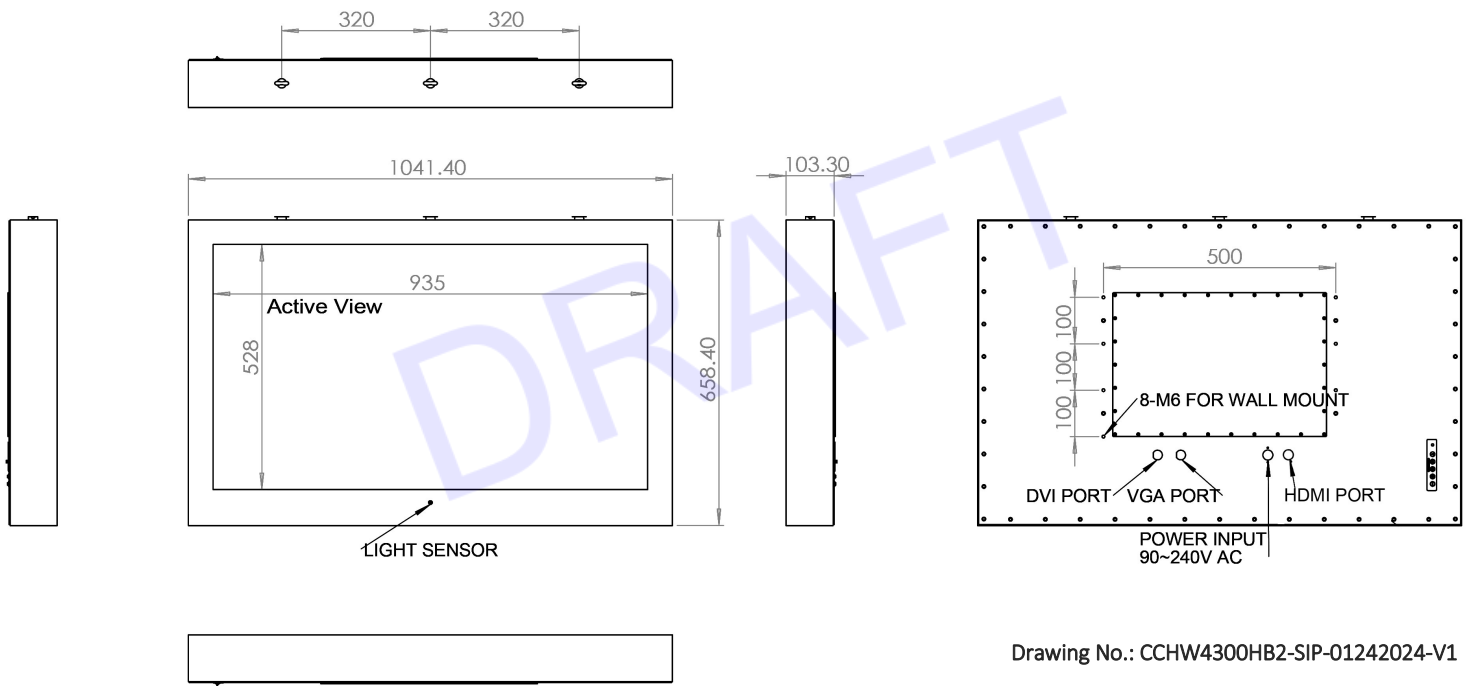

Drawing No.: CCHW4300HB2-SIP-01242024-V1