

RUGGED COMPLETELY SEALED FULL IP66/NEMA4X

STAINLESS STEEL CHASSIS/SURFACE MOUNT

55" 1920x1080, 400nits Stainless Steel 304 Enclosures

Full IP66 with AR Glass, CAT6 HDMI (RX) / (TX), VGA

100-240VAC Power Cord

MODEL: CCHW5500-SIP-EXT



**USB INPUT IS OPTIONAL
FOR TOUCHSCREEN**

FEATURES:


- 55" Industrial Panel / 1920x1080 / 450nits
- Stainless Steel 304 Enclosures with Full IP66 / Wall Mount
- AR Glass / Eye Bolt x 3pcs
- CAT6 HDMI (RX) inside
- I/O (All Connectors are Waterproof Connectors) : VGA / 6ft long, Ethernet cable / 300ft long), 100-240VAC power cord / 6ft long and CAT6 HDMI (TX)

SPECIFICATIONS:

Display	Viewing Size Image	55"
	Active Display Area (mm)	1211.60 (H) x 682.60 (V)
	Pixel Pitch (mm)	0.21(H)x 0.63(V)
	Resolution	1920x1080
	Contrast Ratio	4000 : 1 (typ.)
	Color	1073.7M (10bits/color)
	Brightness	450nits
	Viewing Angle	-89~89 (H) ; -89~89(V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA, HDMI
Power	Source	100 ~ 240VAC Power Cord
	Consumption	170W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV,DP, DVI

MECHANICAL DRAWING

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

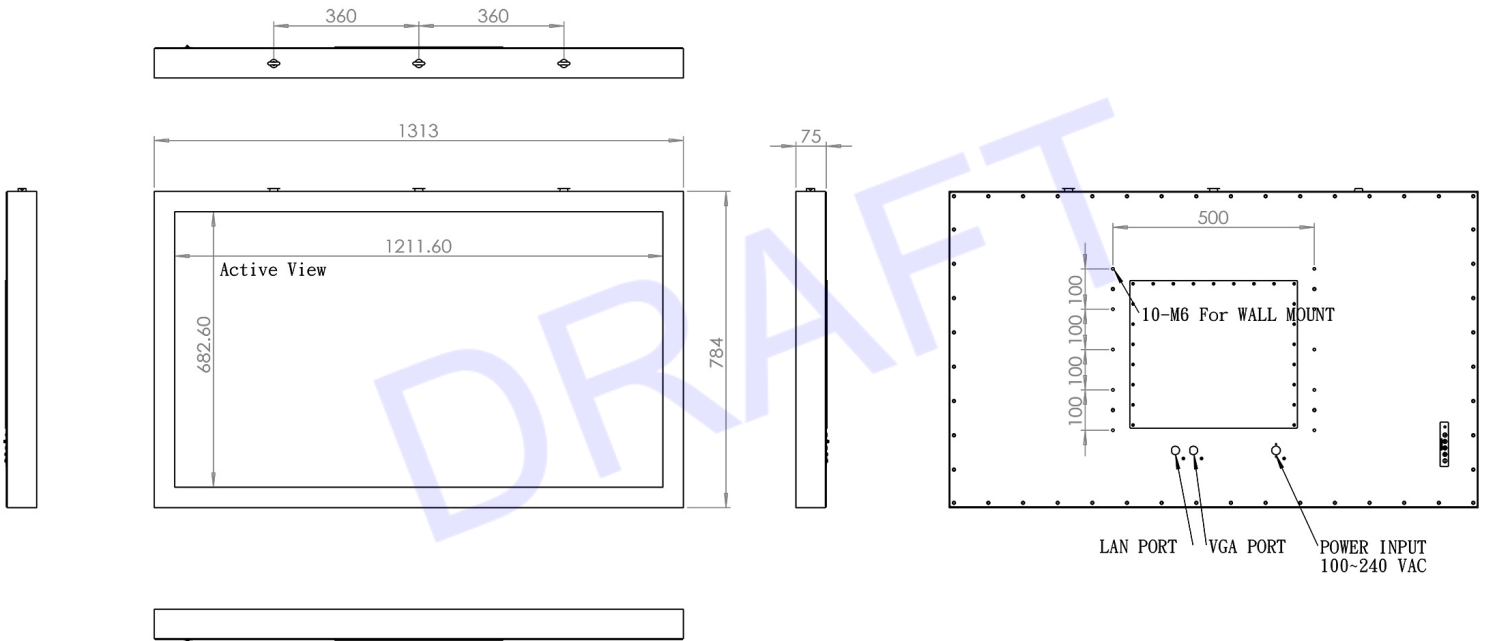

Drawing No.: CCHW5500-SIP-EXT-10162024-V1