

# RUGGED COMPLETELY SEALED FULL IP66/NEMA4X STAINLESS STEEL

65" Chassis/Surface Mount Stainless with Full IP66 1920x1080, 350nits, Operating Temp.: -10C ~ 50C, I/O ( all connectors are Waterproof Connectors 15ft long ) : VGA, DVI, HDMI, 100-240VAC power cord ( for panel use ) and 220VAC power cord (for Heater use)

**MODEL: CCHW6500-SIP-H**



## FEATURES:


- High Contrast color TFT LCD Monitor support resolution up to FULL HD (1920 x 1080)
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Heavy duty Monitor with steel frame.
- Custom design by request.
- 220VAC blanket heater ( 2 pcs ) with Temp. controller / Heater Power ON-OFF switch
- AR Glass / Eye Bolt x 3EA

## SPECIFICATIONS:

<b>Display</b>	Viewing Size Image	65"
	Active Display Area (mm)	1432 (H) x 807 (V)
	Pixel Pitch (mm)	0.744(H)x 0.744(V)
	Resolution	1920 x 1080
	Contrast Ratio	5000:1 (typ.)
	Color	1073.7M (10bits/color)
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Brightness	350 cd/m2
	Recommended Resolution	1920 x 1080 @ 60Hz 10bit 1.07B
	Signal Connector	VGA, DVI, HDMI
<b>Power</b>	Source	100-240VAC power cord ( for panel use ) and 220VAC power cord (for Heater use)
	Management	VESA DPMS Compliant

# MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

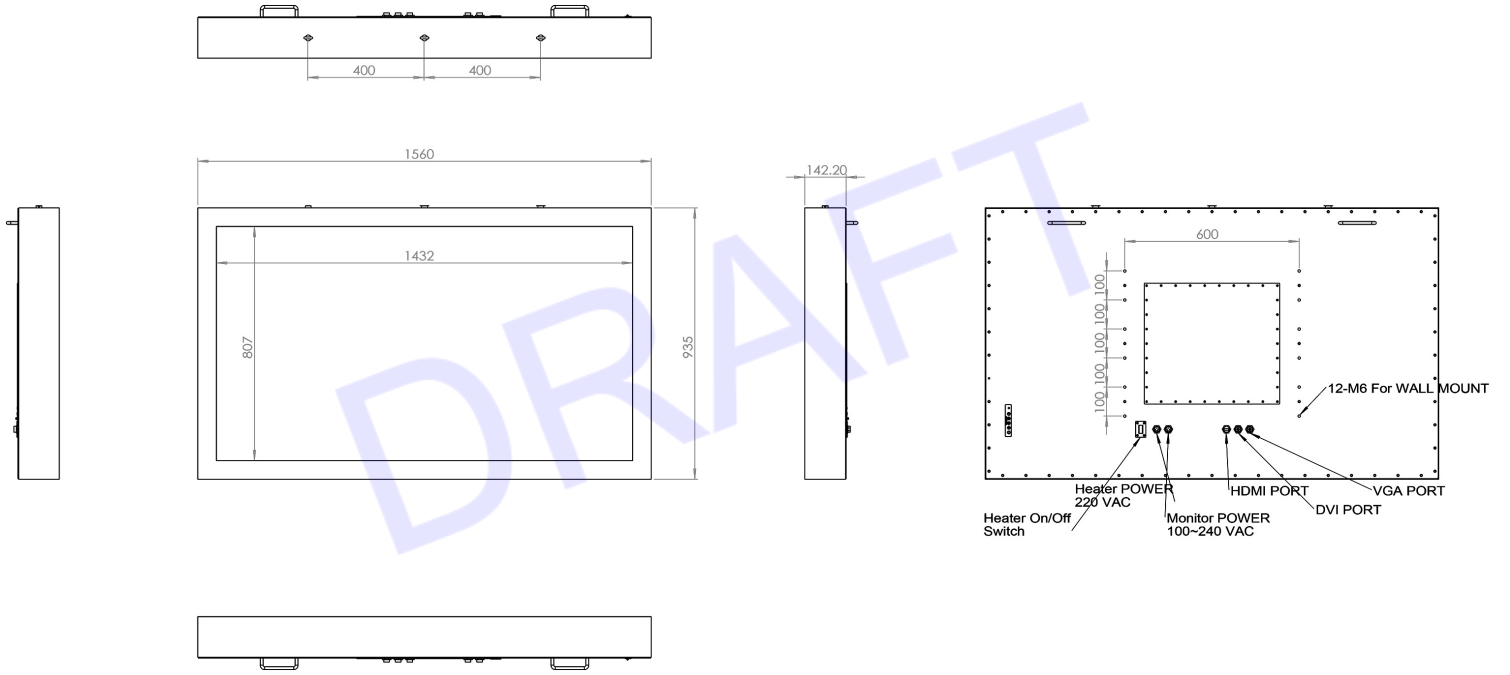

Drawing No.: CCHW6500-SIP-H-01302023-V1