

IP65 FRONT PANEL MOUNT (Metal-3mm)



15" Industrial Panel 1024x768, 1500nits, Clamp with VESA Mount AR glass with VGA and 12VDC with External 100-240VAC Power Adapter

MODEL: CPM1500IPHB2

FEATURES:

- IP65 Front Panel Mount (Metal-3mm)
- 15" industrial panel / 1024 x 768
- Brightness 1500nits
- Panel Mount (with 3mm front bezel) / Clamp with VESA Mount
- AR Glass
- I/O : VGA and 12VDC with external 100-240VAC power adapter

SPECIFICATIONS:


Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating
	Aspect Ratio / Size	4 : 3 / 15" viewable diagonal area
	Active Area / Pixel Pitch	305.80(H) x 229.70(V) mm / 0.297(H) x 0.297(V) mm
	Native Resolution / Colors	1024(H) x 768(V) / 16.2 M
	Brightness / Contrast	1500 cd/m ² (typ) / 700 : 1
	Response Time	< 35 ms
	Viewing Angle (typical)	H. 140° (- 70° ~ + 70°) , V. 120° (- 60° ~ + 60°)
	Light Source	LED backlight, Long life, 35,000 hrs (typ)
Power	Power Input	External 100-240VAC Power Adapter
	Power Consumption	30 Watt, <1 Watt
Operating Condition	Temperature / Humidity	0°C ~ 70°C (32°F ~ 158°F) , 10% ~ 90% (no condensation)
Dimensions	Physical	Please refer to Drawing
	Carton	W x H x D = TBD

Options	Touch	Video / TV	Enhanced Panel	Others
	Resistive touch	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Capacitive touch	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
	SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
	Infrared touch		Sunlight Readable	Light Sensor
	Protected glass			Auto-Dimming

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

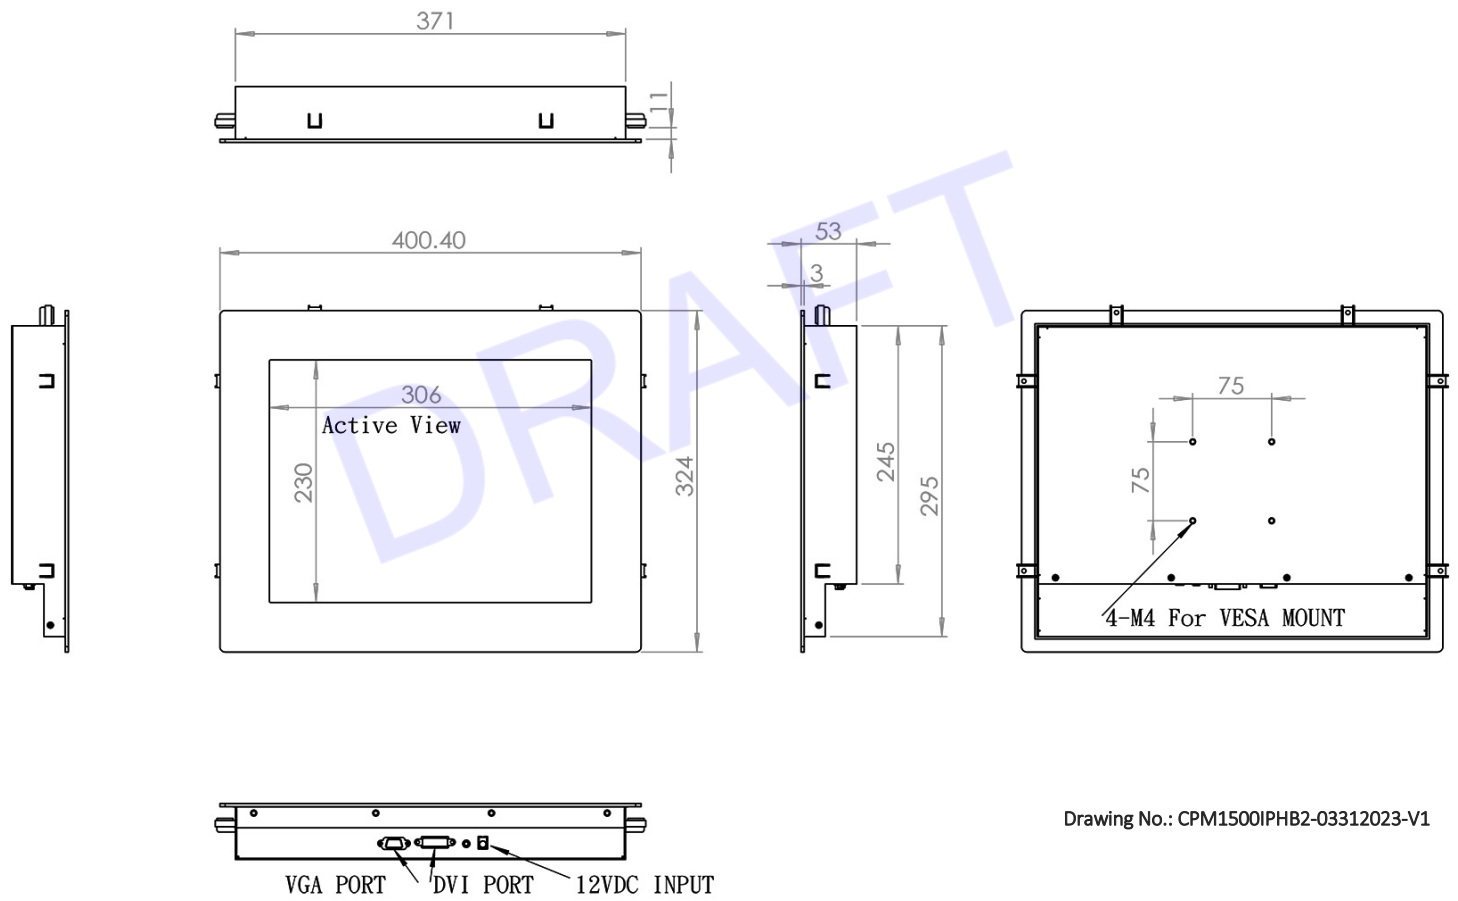

Drawing No.: CPM1500IPHB2-03312023-V1