

# FULL IP66 STAINLESS ENCLOSURE WITH 9U RACK MOUNT DESIGN



19" Industrial Panel / 1280x1024 / 1000nits ( Backlight Module Modified ) with Resistive Touch I/O ( all connectors are waterproof connectors / 6ft long ) : VGA, DVI, USB ( for Touch use ) and 12VDC with external 100-240VAC Power Adapter

**Model: CRM919S-TR**

## FEATURES:

- 19" Industrial Panel / 1280x1024
- 1000nits (Backlight Module Modified) with Resistive Touch
- Stainless enclosure with 9U Rack mount design / Full IP66
- I/O ( all connectors are waterproof connectors / 6ft long ) : VGA, DVI, USB ( for Touch use )
- 12VDC with external 100-240VAC power adapter


## SPECIFICATION:

Display	Viewing Size Image	27"
	Active Display Area (mm)	597.6 (H) x 336.15 (V)
	Pixel Pitch (mm)	0.31125 (H)x0.31125 (V)
	Resolution	1920 x 1080
	Contrast Ratio	3000 : 1 (typ.)
	Color	16.7M
	Brightness	1000nits
	Viewing Angle	-89~89 (H) ; -89~89(V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA,DVI
	Operating Temp	0°C ~ 50°C
Power	Source	9~36 VDC
	Management	VESA DPMS Compliant

*\*Specifications subject to change without notice, not responsible for typographical errors.*

# MECHANICAL DRAWING:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

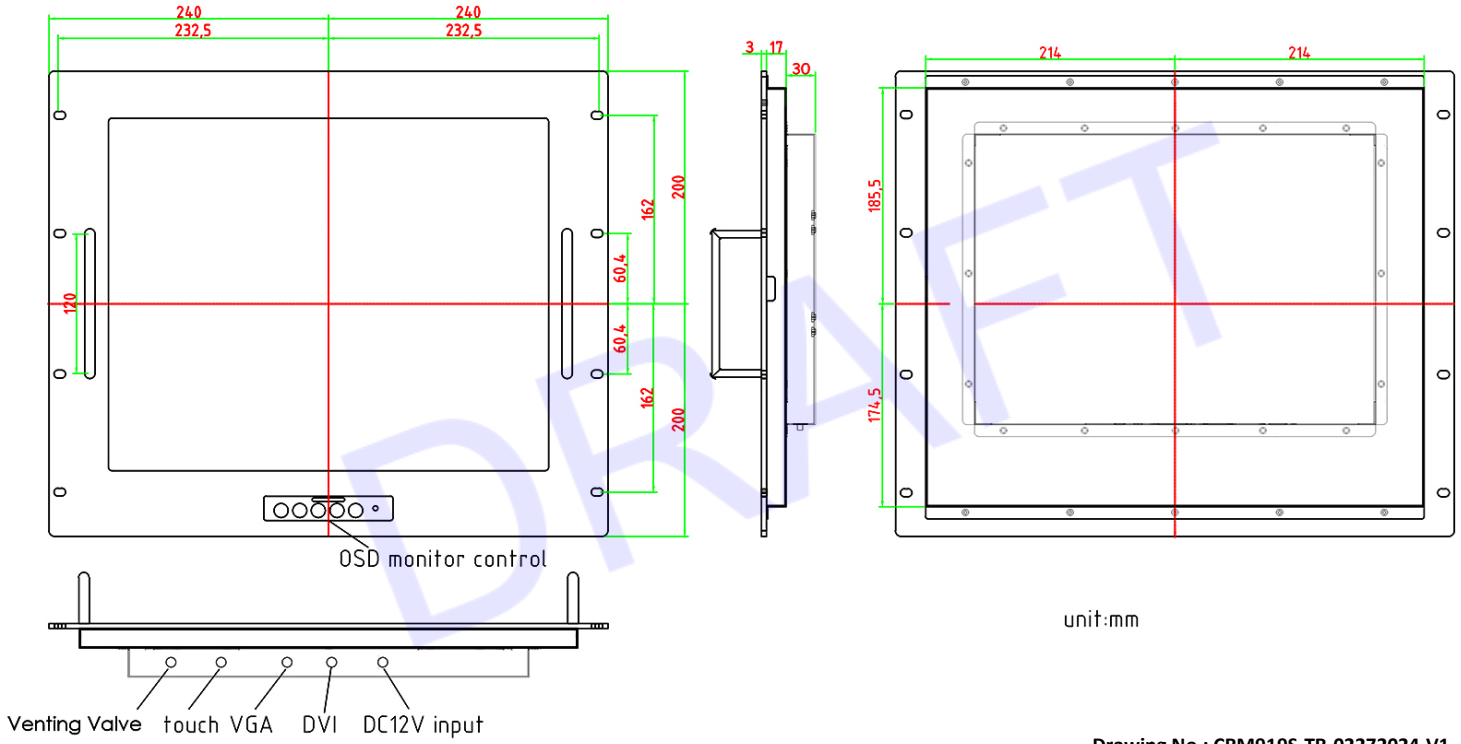

Drawing No.: CRM919S-TR-02272024-V1