HIGH BRIGHTNESS RUGGED COMPLETELY SEALED FULL IP66/NEMA4

32" Stainless Steel Chassis/Surface Mount 1920x1080, 2000nits Stainless Stainless Steel 304 Enclosures with Full IP66, VGA, DVI and 100-240VAC Power Cord, Auto Dimming Control, AR Glass

MODEL: SCHW3200HB2-SIP

FEATURES:

- **32" Industrial Panel (AUO_P320HVN07.1) / 1920 x 1080 / 2000nits (standard)**
- **Stainless steel 304 enclosures with Full IP66 / wall mount**
- **AR Glass**
- **Air curtain inside design / Thermal pad behind rear enclosure / Venting valve x 2pcs**
- **I/O (all connectors are waterproof connectors / 6ft long) : VGA, DVI and 100-240VAC power cord**
- **Auto Dimming control**

SPECIFICATIONS:

DISPLAY	Viewing Size Image	32"
	Active Display Area (mm)	701 (H) x 396 (V)
	Pixel Pitch (mm)	0.3638(H)x 0.3638(V)
	Resolution	1920x1080
	Contrast Ratio	3000 : 1 (typ.)
	Color	16.7 M(8bits+colors)
	Brightness	2000nits
	Viewing Angle	-89~89 (H) ; -89~89(V)
	Signal Connector	VGA + DVI
	Operating Temp	0°C ~ 60°C
POWER	Source	100-240VAC Power Cord
	Management	VESA DPMS Compliant
OPTIONAL	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV,VGA,DP

Specifications subject to change without notice, not responsible for typographical errors.

i-Tech Company LLC
EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com

Modified Date: 06-17-2024

MECHANICAL DRAWING

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

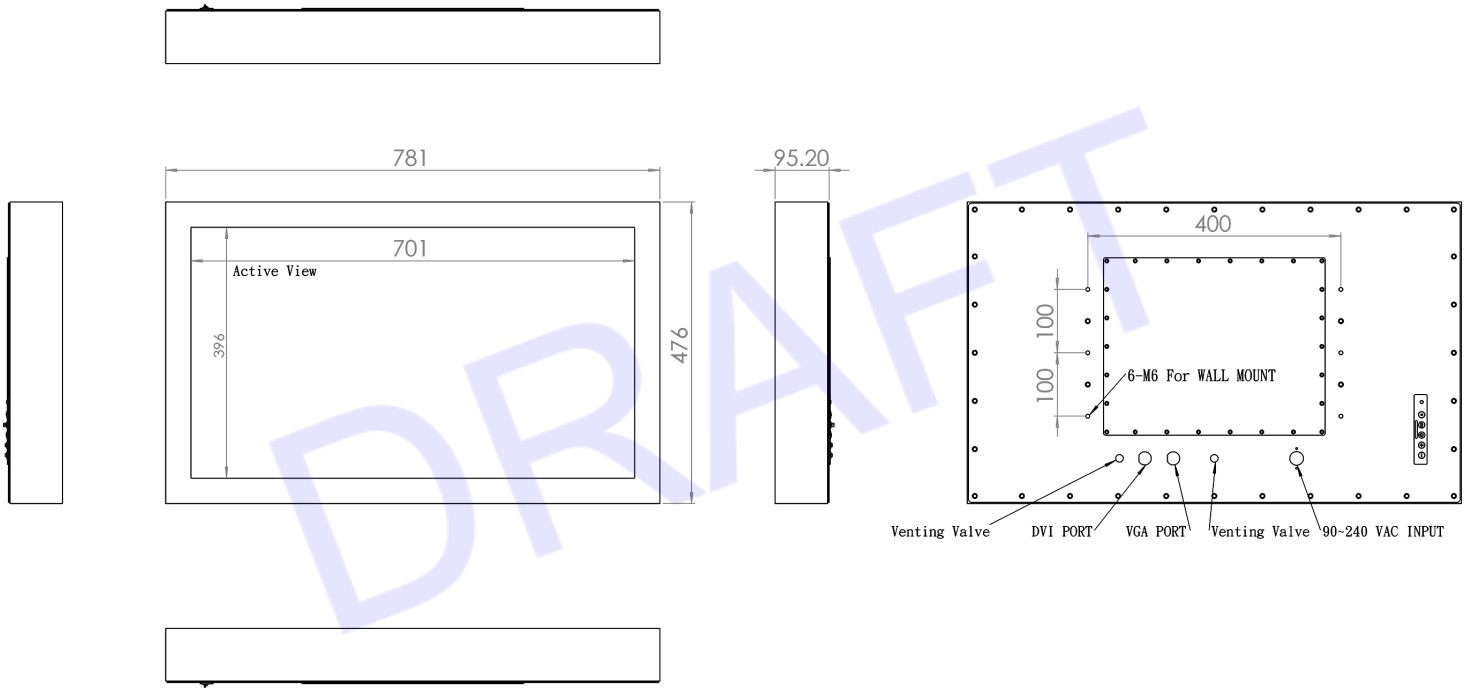

DRAFT

Drawing No.: SCHW3200HB2-SIP-06122024