

MODEL: UPM4300HB2-TC

FEATURES:


- **43" industrial panel / 1920 x 1080 / 2500nits / High TNI / Portrait Mode**
- **Operation Temp. : 0C to 50C**
- **Panel Mount (with 3mm front bezel) / clamp with wall mount / Portrait Mode**
- **P-CAP Touch / Front IP65 / Rear IP54**
- **Speakers**
- **I/O : VGA, DVI, HDMI, USB (for Touch use) and 100-240VAC**
- **Blanket heater (510W / 100AC) / Temp. controller / Heater ON_OFF switch**
- **Operation Temp. : -15C to 50C**
- **It has the separated Heater Power ON/OFF power switch to avoid condensation issue.**

SPECIFICATIONS:

Display	Viewing Size Image	43"
	Active Display Area (mm)	527.90(H) x 934(V)
	Pixel Pitch (mm)	0.49005(H)x 0.49005(V)
	Resolution	1920x1080
	Contrast Ratio	4000:1 (typ.)
	Color	16.7M
	Brightness	2500nits
	viewing Angle	-89-89 (H); -89-89 (V)
	Recommended Resolution	1920 x 1080 @60Hz
	Input / Output	VGA, DVI, HDMI, USB (for Touch use)
Power	Source	100-240VAC
	Consumption	49.28W typical, normal operation
	Management	VESA DPMS Compliant

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

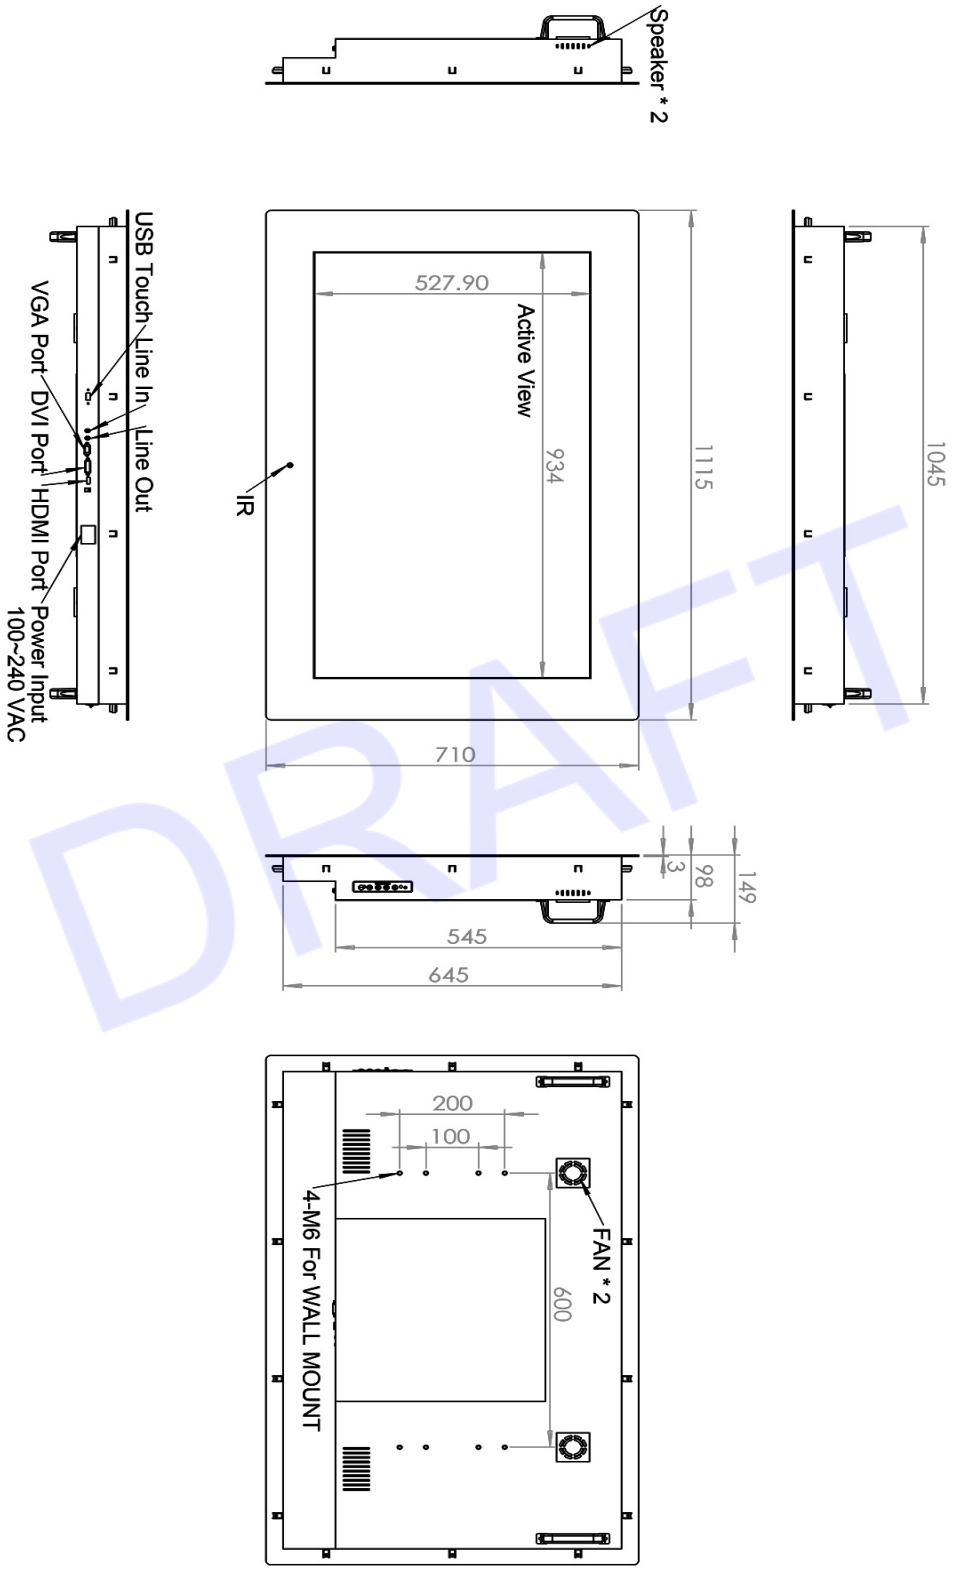

DRAFT

Drawing No.: UPM4300HB2-TC-10302026-V1