



## Maximize Uptime... Reduce Overhead

The Elegant Solution for  
control and monitoring  
from wherever you are.

Stay in touch with your  
IT equipment conveniently  
24 hours a day, 7 days a week.



The **DUALCOM™** offers a **TCP/IP** interface allowing you to connect through a web browser, a menu driven telnet session or using SNMP commands.




The **DUALCOM™** offers a serial interface allowing out-of-band connectivity to control, monitor and protect your outlets.

### Features:

- Monitor current on each outlet
- Turn each outlet on/off
- Schedule outlets on/off
- Web browser, telnet and SNMP management
- Serial enabled
- Manage users
- Login/password security
- Event logging
- Customize outlet names
- Over/under current warnings
- Intuitive user interface

The **DUALCOM™** allows remote power management and represents a new approach to managing your system. Save energy by scheduling shutdown periods. Properly allocate current requirements.

The **DUALCOM™** will maximize your uptime and reduce your overhead.

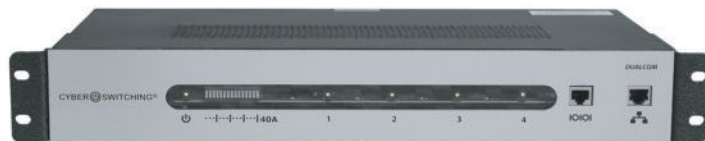

Can be customized for different configurations

# CYBER@SWITCHING®

## DUALCOM 1640V PLUS 520R 520P Dual Feed (0 RU)


Part # 1013021

*The Dualcom PLUS allows remote power management and represents a new approach to managing your system. Save energy by scheduling shutdown periods. Monitor current consumption to utilize valuable rack space efficiently.*


### Technical Specifications

<b>Output</b>	
Output Voltage	120 VAC
Output Connections	(16) NEMA 5-20R
Output Current per Bank	20 A
Output Current per Receptacle	20 A
<b>Input</b>	
Input Voltage	120 VAC
Input Frequency	60 Hz
Input Connection Type	(2) NEMA 5-20P
Cord Length	12 feet
Input Current	40 A (2 x 20 A)
Load Capacity	4,800 VA (2 x 2,400 VA)
<b>Physical</b>	
Net Weight	12.10 lbs.
Maximum Height	65.00 inches
Maximum Width	1.75 inches
Maximum Depth	2.75 inches
Shipping Weight	15.10 lbs.
Shipping Height	72.00 inches
Shipping Width	7.50 inches
Shipping Depth	4.50 inches
Color	Black
<b>Environmental</b>	
Operating Environment	0 to 45° C
Maximum Operating Relative Humidity	95%
Storage	-25 to 85° C
Regulatory Approval (Pending)	cUL Listed, UL Listed, IEC 60950-1, FCC Class A
<b>Warranty</b>	
Standard	2 years repair or replace
Extended	Optional
<b>Communication</b>	
Network Settings	10BaseT
Serial Settings	RS-232 (Cisco DCE pin-out)

Outlet/Receptacle:



Input/Plug:



Features:

- Events tracked in an event log, including change of outlet states, logins and logoffs, and user IP addresses.
- Receive event logs via SNMP, syslog, and e-mail automatically
- Assign descriptive names to each outlet
- Total system current displayed on seven-segment LED display
- Outlet memory restores outlet states in event of power outage
- Outlet states, under- and over-current warnings, and Virtual Circuit Breaker™ notices provided on front panel

DERATE TO 80% FOR CONTINUOUS LOAD  
SUBJECT TO CHANGE WITHOUT NOTICE

Rev 2.1



#### Distributed by:

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)