

# RUGGED TABLET PC

10.1" Windows Rugged Tablet, 800\*1280@750nit, N5100  
4GB+64GB, RJ45, 7.6V@5000mAh Battery

Model: RRDW101



## FEATURES:

- 10.1" rugged tablet with 11th Gen Intel Celeron N5100 processor and Windows 10/11
- Integrated 1D/2D Barcode Reader, NFC/RFID, Fingerprint Module
- Support 4G LTE, WLAN, BT & GNSS
- I/O Interface: RS232/RJ45 Ethernet/USB/HDMI
- Removable high-capacity battery design
- IP67 and 1.22m drop certified


## SYSTEM SPECIFICATIONS:

Standard Configuration	
Dimension	249.7x18x23.1mm
Weight	1200g
Color	black
LCD	10.1-inch 16:10 TFT IPS LCD,800*1280, 750nits
Touchscreen	10 point capacitive touch screen, G+G, gorilla glass, hardness 7H
Camera	Front 5MP fixed focus camera, Rear 8MP autofocus camera with flash
Speaker	8Ω/1W,Stereo dual speakers
MIC	Built-in microphone
Battery	Removable polymer Li-ion battery,7.6V 5000mAh
Battery Life	6 hours (1080P video is played at 50% brightness by default)
System Hardware Configuration	
CPU	Intel JASPER LAKE N5100,4 MB SmartCache,Up to 2.8GHz
GPU	Intel HD Graphics Gen 11 LP
RAM	4GB LDDR4(Optional 8GB)
ROM	64GB SSD(Optional 128GB/256GB)
Sensor	G-sensor
Network	
WIFI	WIFI 802.11 (a/b/g/n/ac) 2.4G+5.8G
Bluetooth	BT4.2 (BLE) class1, Transmission distance,10m
4G	LTE FDD: B1/B3/B5/B7/B8/B20
	LTE-TDD B40
	WCDMA: B1/B5/B8 GSM: 900/1800
GPS	GPS/Glonass/beidou(G+G+B)

Data Collection (Optional)	
NFC	13.56MHz,Support ISO/IEC 14443A/14443B/ 15693/18092/mifare,Card reading distance:2~5cm
	HF:13.56MHZ,Support ISO/IEC 14443A/14443B/15693 UHF: PR9200 / R2000
RFID	HF:13.56MHZ,Support ISO/IEC 14443A/14443B/15693 UHF: PR9200 / R2000
2D Scan Reader	Optical resolution: 5mil,scanning speed: 50 times/s
Fingerprint	ISO/FBI Certification
I/O Interface	
TF Card	TF card slot x1,Up to 256GB
SIM Card	Micro SIM card slot x1
USB Type-C	Type-C x1,Charging and data transmission
USB Type-A	USB 3.0 x1
Earphone Jack	3.5mm standard earphone jack x1
HDMI	Mini HDMI 1.4a x1
Ethernet	RJ45 x1,10/100/1000M
Pogo Pin	12pin*1
Aviation Plug	Aviation Plug x2(Optional),USB/RS232/DC-IN (three choose two)
Keys and Indicators	
Function Key	Function key x2
Power Key	Power key x1
Volume Key	Volume+ x1 ,Volume - x1
Indicator	Battery indicator light x1
Software	
OS	Windows 10/11
Reliability	
Drop	1.22m drop
Dustproof and Waterproof	IP67
Operate Temperature	-10 °C ~ 50 °C
Store Temperature	-20 °C ~ 60 °C
OSD	Contact discharge :±5kV, Air discharge:±10kV
Humidity	95% Non-Condensing

## MECHANICAL DRAWING:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

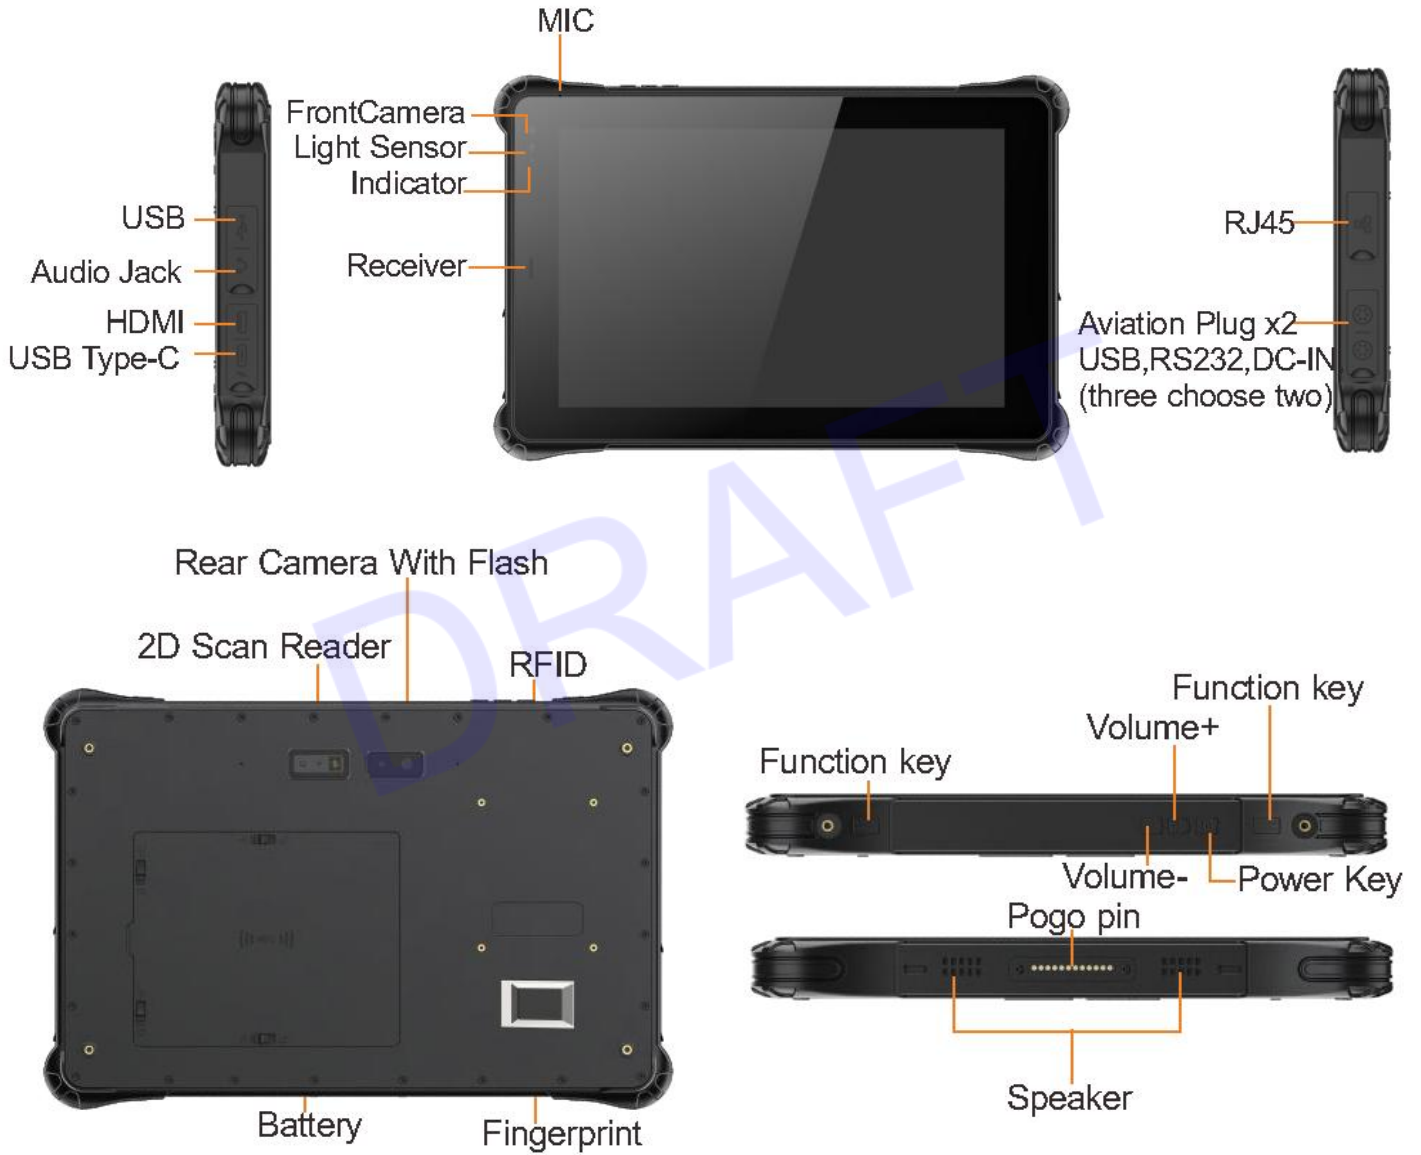

Drawing No.: RRDW101-06132023-V1