

CHASSIS MOUNT PROFESSIONAL VIDEO MONITOR



Chassis mount 21.5" 1920 x 1080 , 1000nits high Brightness, 170 WVA, Front OSD, HDMI 1.4b x 1, VGA, AV, speakers Operating temp -20C-50C, weight 4.8kg

MODEL: LCHW2150HB



LAYOUT AND COMPOSITION
The image output from the camera to TV live is often slashed. This monitor comes with Center Markers and Safety Markers, allowing to adjust the best angle of cameras in real time to show the most important images in center of shot.

AUDIO LEVEL MONITORING
With Audio Level Meter turned on, it is used to monitor current audio output and avoid being indifferent after an audio interruption as well as keep the sound within a reasonable DB range.

1000 NIT HIGH-BRIGHT
Featuring an amazing 1000 nit High Bright LCD screen, with the sunshine readable screen which cover 101% Rec.709 color space, therefore the gear suitable for any innovative outdoor framing.


HDR
When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality.





Wall-mount

It can be installed and fixed on the wall through the VESA 75/100 mm screw points at its back.

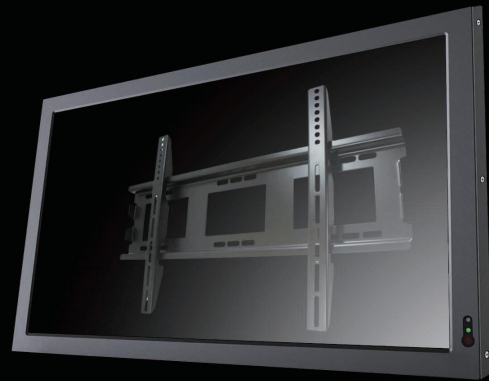

ACCESSORIES

STANDARD



15V 4A DC Power Adapter



HDMI A to A Cable




VGA Cable



Audio & Video Input Cable



Base Stand



User Manual

SPECIFICATIONS

DISPLAY	
Panel	21.5" LCD
Physical Resolution	1920x1080
Aspect Ratio	16:9
Brightness	1000 cd/m2
Contrast	1500:1
Viewing Angle	170°/170° (H/V)
Color Space	101% Rec. 709
HDR Supported	HLG; ST2084 300/1000/1000
INPUT	
SDI	-
HDMI	1 x HDMI 1.4b
VGA	1
AV	1
USB	USB 2.0 (for upgrade)
OUTPUT	
SDI	-
SUPPORT ED FORMATS	
SDI	-
HDMI	2160p 24/25/30, 1080p 24/25/30/50 /60, 1080i 50/60, 720p 50/60...
AUDIO IN/OUT	
Speaker	2
SDI	-
HDMI	8ch 24-bit
Ear Jack	3.5mm - 2ch 48kHz 24-bit
POWER	
Input Voltage	DC 12-24V
Power Consumption	<36W (15V)
ENVIRONMENT	
Operating Temperature	0°C~50°C
Storage Temperature	-20°C~60°C
DIMENSION	
Dimension(LWD)	527.8mm x 313.3mm x 19.8mm
Weight	4.87kg

**Specifications subject to change without notice, not responsible for typographical errors.*