

# 1500nits SUNLIGHT READABLE INDUSTRIAL TOUCH MONITOR

10.1" 1500nits High Brightness Industrial Grade HDMI Monitor (with HDMI with IP65 Rating Front and Back)  
Operating Temp -20-60C  
Storage Temp -30-60C  
which with IP65 rating frame and HDMI Extension Cable.

## IP65 RATING IP65 FRAME

Monitor is designed to carry IP65 degree of protection which offer complete protection against particles, and a good level of protection against water projected by a nozzle against monitor from any direction.

## MODEL: LECHW1010HB-IP



### FEATURES:

#### 10.1" FHD

10.1" Industrial-grade touch screen panel with 1920x1200 resolutions.

#### 1500 NITS

The screen can still be seen clearly in outdoor use without hindering operation.

#### AUTO DIMMING

Depending on the intensity of ambient light, the brightness of screen will be automatically adjusted to save power.


#### 50000 HRS LED PANEL LIFE TIME

Hardware engineers selected high quality industrial-grade LCD screen through multiple tests, giving the monitors an exceptional working life.

## IP65 FRAME

### WITH HDMI AND VGA EXTENSION CABLE

Rugged extension cable designed for body water proofing and dust proofing, with two different options for HDMI and VGA ports.

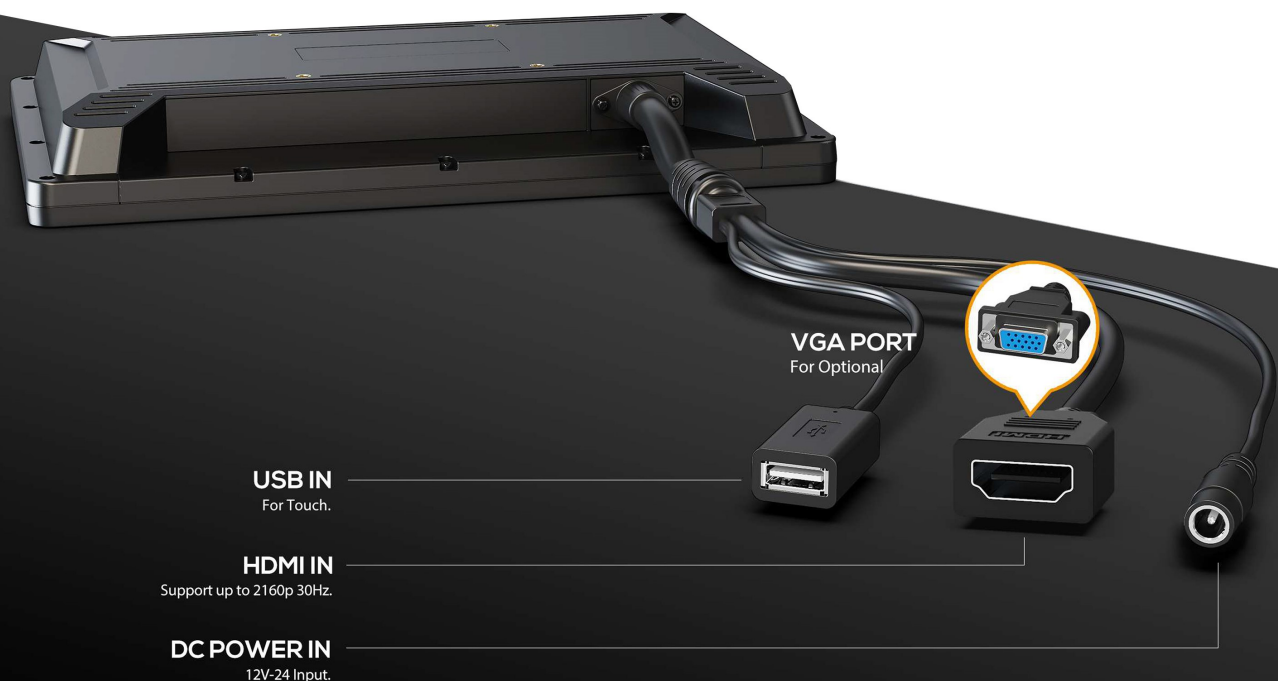

## SPECIFICATIONS:

<b>Display</b>	Touchscreen	Capacitive Touch
	Panel	10.1" LCD
	Physical Resolution	1920x1200
	Aspect Ratio	16:10
	Brightness	1500nits
	Contrast	1000:1
	Viewing Angle	170°/170°(H/V)
	LED Panel Life Time	50000h
<b>Input</b>	HDMI	1
	VGA	1
	USB	1 (USB Type C)
	USB	1 (upgrade port)
<b>Supported Formats</b>	HDMI	2160p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
	VGA	1080p 24/25/30/50/60, 1080pSF 24/25/30, 1080i 50/60, 720p 50/60...
	USB Type-C	1080p 24/25/30/50/60, 1080pSF 24/25/30, 1080i 50/60, 720p 50/60...
<b>Audio IN / Out</b>	Speaker	1
	HDMI	2ch
	Ear Jack	3.5mm - 2ch 48kHz 24-bit
<b>Power</b>	Input Voltage	DC 12-24V
	Power Consumption	<19W(12V)
<b>Environment</b>	IP Rating	IP65 (Only available for the monitor with extension cable)
	Operating Temp	-20°C ~ 60°C
	Storage Temp	-30°C ~ 60°C
<b>Dimension</b>	Dimension (LWD)	251mm * 170mm * 33mm
	Weight	820g
<b>Extension Cable</b>	HDMI Extension Cable	HDMI, USB-A (For touch)
	VGA Extension Cable	VGA, USB-A (For touch)

*\*Specifications subject to change without notice, not responsible for typographical errors.*



## ACCESSORIES

### IP65 FRAME



12V 3A Power Adapter



HDMI A-A Cable  
(HDMI Ver.)



VGA Cable  
(VGA Ver.)




USB-A - A Cable (For Touch)

### OPTIONAL



VESA 75mm Bracket



Remote Control