


# RUGGED NVIS MILITARY LCD MONITOR



Rugged 15" Monitor, 1024x768, 1000~1200 nits, Day and Night Vision  
 Built-in Heater module, 1x VGA, 1x DVI, 1x HDMI, AC90~264V  
 or optional DC9~36V Power Input Strengthen Protective Glass

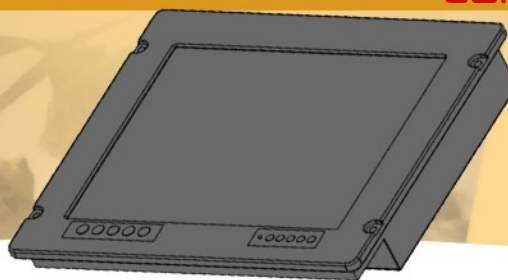

**Model: Nmil-1500-NVIS**

## FEATURES:

- Rugged 15" LCD Monitor
- 1000~1200 nits
- Built-in Heater Module
- Day and Night Vision
- Power Supply AC Power Input AC90~264V, 50/60 Hz
- Strengthen Protective Glass
- Optional DC9~36V

## SPECIFICATIONS:


<b>Housing</b>	Front Bezel	Mil. grade aluminum alloy narrow bezel
	Chassis	Galvanized steel with anti-corrosion coating
	Color	Semi gloss finish in black
<b>Mount</b>	Front Mount	Support Front Mount
	VESA Mount	Support VESA-1
<b>LCD Module</b>	LCD Size	15" TFT LCD
	Resolution	1024x768
	Brightness	1000~1200 cd/m2
	Contrast Ratio	1000 : 1
	Display Color	16.7 M
	View Angle	70° / 70 / 50 / 60°
<b>Touch or Glass</b>	Touch	No, (it is optional)
	Protective Glass	Yes, built in strengthen protective glass
<b>I/O Port</b>	VGA	1 x VGA
	DVI	1 x DVI
	HDMI	1 x HDMI
	Power input	1 x AC or DC with mil. Circular connector
<b>OSD</b>	NV OSD N : Night Vision 10 nits D : Day Vision 1000 nits	
	Standard OSD	

\*Specifications subject to change without notice, not responsible for typographical errors.

<b>Power Supply</b>	AC Power Input	AC90~264V, 50/60 Hz
	Optional DC Input	DC9~36V
	Power Consumption	Around 30~35 Watts
<b>Dimensions</b>	Exclude Front Bezel	392 (W) x 322 (H) x 61 (D) mm
	Include Front Bezel	392 (W) x 322 (H) x 71 (D) mm
<b>Environmental</b>	Operating Temperature	-30 to +80° C
	Storage Temperature	-30 to +95° C
	Humidity	5%~95% R.H. at 30 deg. C, non-condensing
	Vibration	Optional MIL-STD-810
	Shock	Optional MIL-STD-810
<b>EMI / EMC</b>	CE	Approval
	FCC	Approval
	MIL-STD-461E.F.G	Optional

# MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

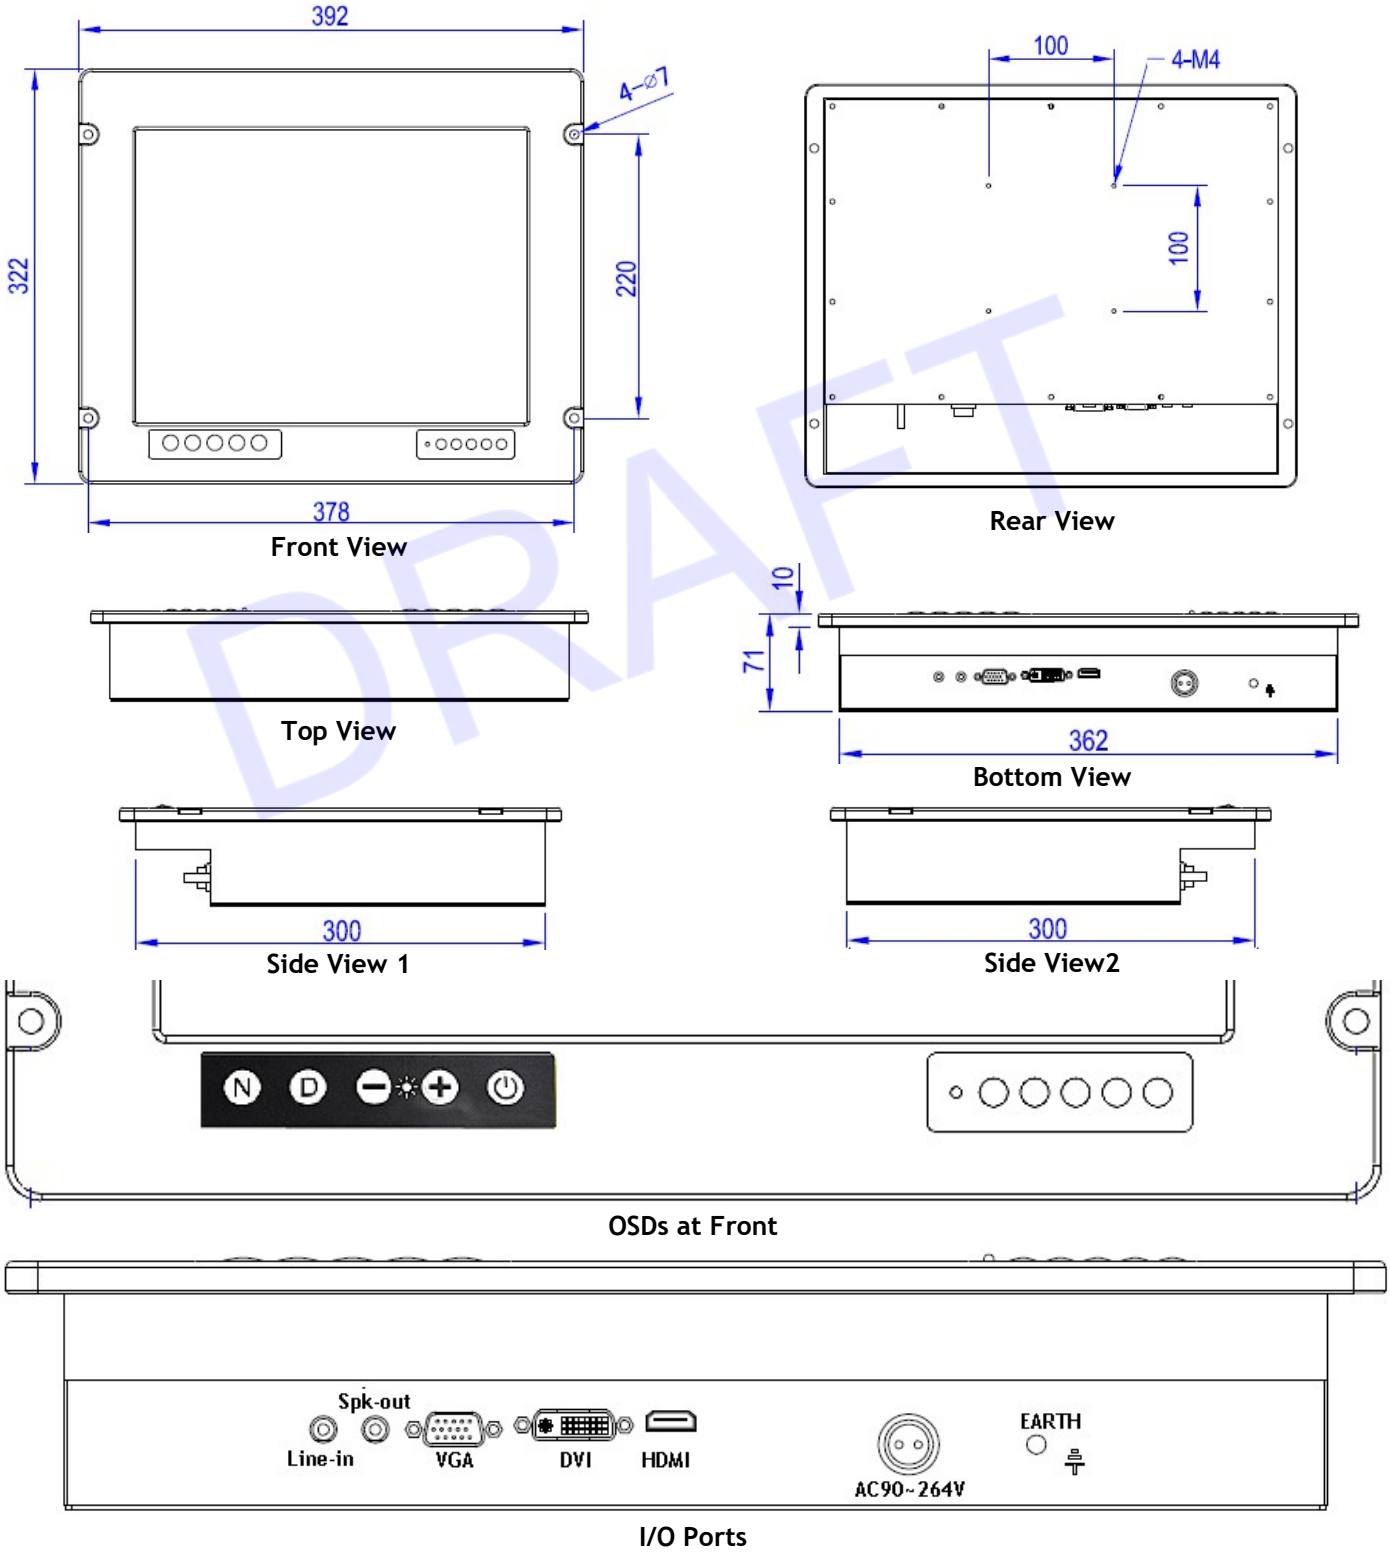

Drawing No.: Nmil-1500-NVIS-02222024-V1