

1-PHASE BASIC PDU

PDU, 230V 16A, 12 × IEC C13 outlets, 16A MCB Protection
IEC320 C20 input plug with 3-meter H05V V-F Power Cord
3.7 kVA Capacity, Steel Chassis (Black)
Dimensions 442x120x44 mm

Model: IT-1U-16A-12C13-C20



SPECIFICATION

Operating Temperature	-5 to 60 °C
Storage Temperature	-25 to 65 °C
Operating Altitude	0 to 2,000 m
Storage Altitude	0 to 15,000 m
Humidity (non-condensing)	8 to 95% RH
Chassis Material / Color	Steel / Black
Product Dimension	442 W x 120 D x 44 H (mm)
Packing Dimension	525 W x 230 D x 80 H (mm)
Net / Gross Weight	2.7 kg / 3.1 kg

**Specifications subject to change without notice, not responsible for typographical errors.*

SAFETY CERTIFICATES

CB	IEC 62368-1:2018
CE / LVD	BS EN IEC 62368-1:2020 BS EN IEC 62368-1:2020 + A11:2020
UKCA	EN IEC 62368-1:2020 EN IEC 62368-1:2020/A11:2020

EMC CERTIFICATES

CE / EMC	EN 55032:2015 + A1:2020 EN 55035:2017 + A1:2020 EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 EN 61000-3-3:2013 + A1:2019 + A2:2021
----------	--


ENVIRONMENT

RoHS, REACH & WEEE



MECHANICAL DRAWING

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

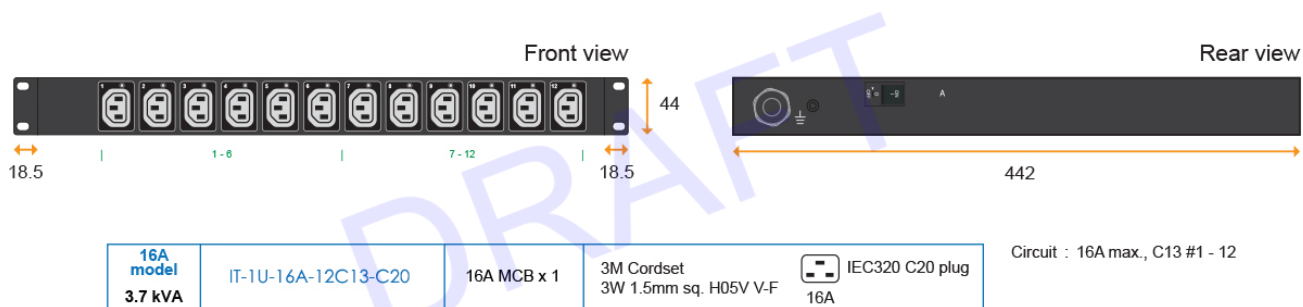

Drawing No.: IT-1U-16A-12C13-C20-10102025