

1U Keyboard / KVM Drawer

Model: NK1e/b



BENEFITS:

- 1U keyboard drawer
- 104-key keyboard with either touchpad or trackball
- One Man installation design
- Enhanced aesthetics with molded front panel and two point lock
- 2-year standard warranty (upgradable up to 5 years)

SPECIFICATIONS

Console Port	
KB / MS	USB interface
	Drawer end : attached 6ft USB cable x 2 Server end : USB type A x 2

Physical		
Dimension (WxDxH)	Product	442 x 600 x 44 mm 17.4 x 23.6 x 1.73 inch
	Packing	580 x 845 x 115 mm 22.8 x 33.3 x 4.5 inch
Net weight	Net	10.9 kg / 24 lb
	Gross	13.2 kg / 29 lb

Mounting Distance	
Single console drawer / Console w/ KVM drawer	560 ~ 790 mm 22 ~ 31.1 inch

OPTIONS:

- MAC or SUN Micro keyboard options available



Environment	
Operating temp.	-20 to 65°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC, CE & CCC certified
Safety	CE / LVD & UKCA
Environment	RoHS2 & REACH compliant

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

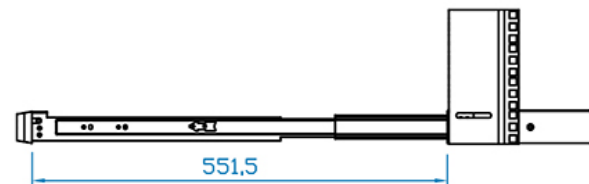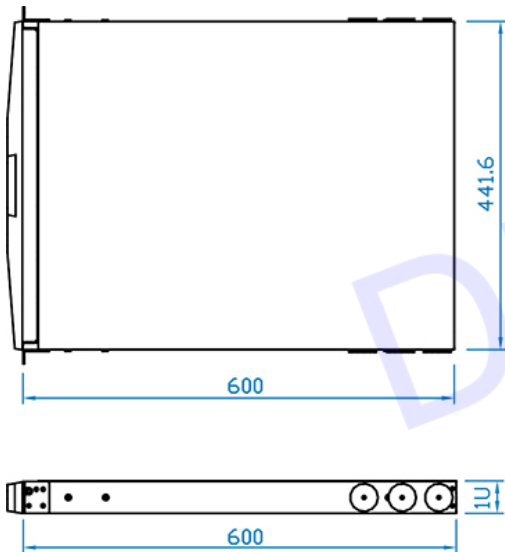

Drawing No.: NK1x-04012022-V1
x= e or b

MODELS with KVM Model: NK1x (x = e or b)

2K KVM	IP	Remote	8-port
	0	0	NK1x-K8e

DVI-D KVM	IP	Remote	12-port
	0	0	NK1x-12De

Matrix CAT6 KVM	IP	Remote	8-port	16-port	32-port
	1	1	-	NK1X-MC1116	NK1X-MC1132
	2	1	-	NK1X-MC2116	NK1X-MC3224
	0	1	-	NK1X-MC0116	NK1X-MC0132
	0	2	-	NK1X-MC0216	NK1X-MC0232
	0	3	-	NK1X-MC0316	NK1X-MC0332

CAT6 Combo KVM	IP	Remote	8-port	16-port	32-port
	1	0	NK1X-CIP8	NK1X-CIP16	NK1X-CIP32
	0	1	NK1X-CCE8	NK1X-CCE16	NK1X-CCE32
	0	0	NK1X-C8	NK1X-C16	NK1X-C32

Combo DB-15 KVM	IP	Remote	8-port	16-port
	1	0	NK1X-IP8	NK1X-IP16
	0	1	NK1X-CE8	NK1X-CE8
	0	0	NK1X-S8	NK1X-S16

DB-15 USB KVM	IP	Remote	8-port	16-port
	1	0	NK1X-IPB8	NK1X-IPB16
	0	1	NK1X-B82	NK1X-B162
	0	0	NK1X-B8	NK1X-B16

2K KVM Cable



NK2-6D (6 ft)
DVI-D KVM cable



NK2-HD (6 ft)
HDMI KVM cable

Resolution 16:9 - max. 2560 x 1440
Support **: 16:10 - max. 1920 x 1200
4:3 - max. 1600 x 1200

DVI-D USB KVM Cable

Resolution 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200



NC-6 (6 ft)
NC-15 (15 ft)

CAT6 KVM Dongle



IF-DUSBC
USB-C dongle



IF-DDP
DP - USB dongle



IF-DHDMI
HDMI - USB dongle



IF-DUSBD
DVI - USB dongle



IF-DUSB
VGA - USB dongle

Resolution 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

DB-15 VGA USB KVM Cable



NB - 6 (6 ft)



NB - 10 (10 ft)




NB - 15 (15 ft)


Resolution Support : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

** Resolution related to LCD specification

Connection to **USB Server**

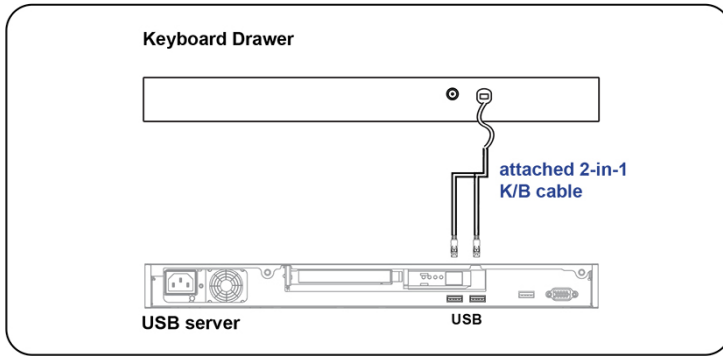

Connection to **external KVM**

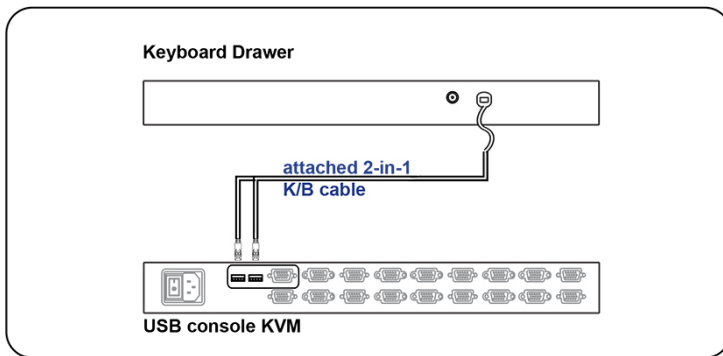

STANDARD KEYBOARD










e keyboard integrated with touchpad



b keyboard integrated with



Supporting layouts

America							
	U.S.						
EMEA							
	U.K.	Germany	France	Russia	Spain	Italy	
	Asia						
		Japan					
			Korea				

KEYBOARD OPTIONS (US layout only)

Me Mac keyboard with touchpad



Se S keyboard with touchpad



Mb Mac keyboard with trackball

Sb S keyboard with trackball