



2U 17" Short-Depth Rackmount LCD USB Keyboard
w/ 8-port USB KVM, Notebook Keyboard w/ touch pad
(Includes 8 pcs 6ft long KVM NB-6 USB KVM Cables)
19" Deep

Model: NVP2417-S801e

BENEFITS:

- 2U 17" LCD console drawer
- Dual slide - LCD and keyboard slide independently
- 1280 x 1024 native resolution / 16.7M colors
- 104-key keyboard with either touchpad or trackball
- Short depth design of 480mm
- One Man installation design
- Enhanced aesthetics with molded front handle and two point lock
- 2-year standard warranty (upgradable up to 5 years)

OPTIONS:

- HDMI 1.4 + DVI-D + Audio in & out + Speakers (AV4.4)
- HDMI 1.4 + Speakers (HDMI)
- S-Video + Composite + Speakers (BNC)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (SDI)
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard option
- 17" Touchscreen :
Projected Capacitive 10-pt / Resistive 1-pt

SPECIFICATIONS

LCD Panel	
Panel size (diagonal)	17"
Native resolution	1280 x 1024
Brightness (cd/m²)	250
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	85/85/80/80
Response time (ms)	5
Dot pitch (mm)	0.264
Display area (mm)	337.92H x 270.33V
Surface treatment	Haze 25%, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Physical		
Product (WxDxH)	Console w/ KVM	442 x 480 x 88 mm 17.4 x 18.9 x 3.5 inch
Packing (WxDxH)	Console w/ KVM	585 x 620 x 190 mm 23 x 24.4 x 7.5 inch
Net weight	Console w/ KVM	21.1 kg / 46.4 lb
Gross weight	Console w/ KVM	27 kg / 59.4 lb

**Specifications subject to change without notice, not responsible for typographical errors.*

Mounting Distance	
Console w/ KVM drawer	490 ~ 700 mm 19.3 ~ 27.6 inch

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC, CE
Safety	CE / LVD & UKCA
Environment	RoHS3 & REACH / WEEE

KEYBOARD OPTIONS *US layout only



Se S keyboard with touchpad

Sb S keyboard with trackball




STANDARD KEYBOARD

Ge G keyboard with touchpad

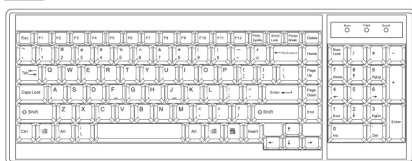

Gb G keyboard with trackball

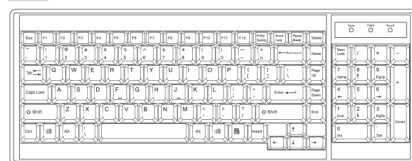


Supporting layouts

America U.S.

EMEA U.K. Germany France Russia Spain Italy

Asia Japan Korea

KVM Rear Kit




⚠ The power of the KVM rear kit may be changed to external power design based on the LCD console drawer series and model.

KVM SPECIFICATIONS

KVM Port		
Number of ports :	8	
Connector :	DB-15 combo connector	
Connectivity :	USB 2-in-1 KVM cable, up to 6, 10 & 15 feet	
Local Console :	Nil for LCD console drawer version	
Management		
Multilingual OSD :	English, France, German, Spanish, Italian, Russian, Simplified Chinese, Japanese	
Hotkey combination :	Scroll-lock, Cap-lock, Num-lock, Alt, Ctrl & Win	
Security :	Password enable & disable, up to 8 users profile for port access	
PC Selection :	Front button, OSD menu & hotkey	
Expansion:	Up to 128 servers by 8-level cascade	
Compatibility		
Hardware :	HP / IBM / Dell PC, Server and Blade Server SUN / Mac	
OS Support :	Windows / Linux / Unix / Mac OS	
Power		
Input :	Auto sensing 100 to 240VAC, 50 / 60 Hz	
Option DC :	12V / 24V / 48V / 125V DC input	
Consumption :	Max. 11W	
Compliance		
EMC :	FCC & CE	
Safety :	CE / LVD & UKCA	
Environment :	RoHS3 & REACH / WEEE	
Environmental	Operating	Storage / Non-operating
Temperature :	0 to 55°C degree	-20 to 60°C degree
Humidity :	10~90%, non-condensing	5~90%, non-condensing
Altitude :	16,000 ft	40,000 ft
Shock :	-	10G acceleration (11ms duration)
Vibration :	-	10~300Hz 0.5G RMS random vibration


KVM PORT CONNECTION

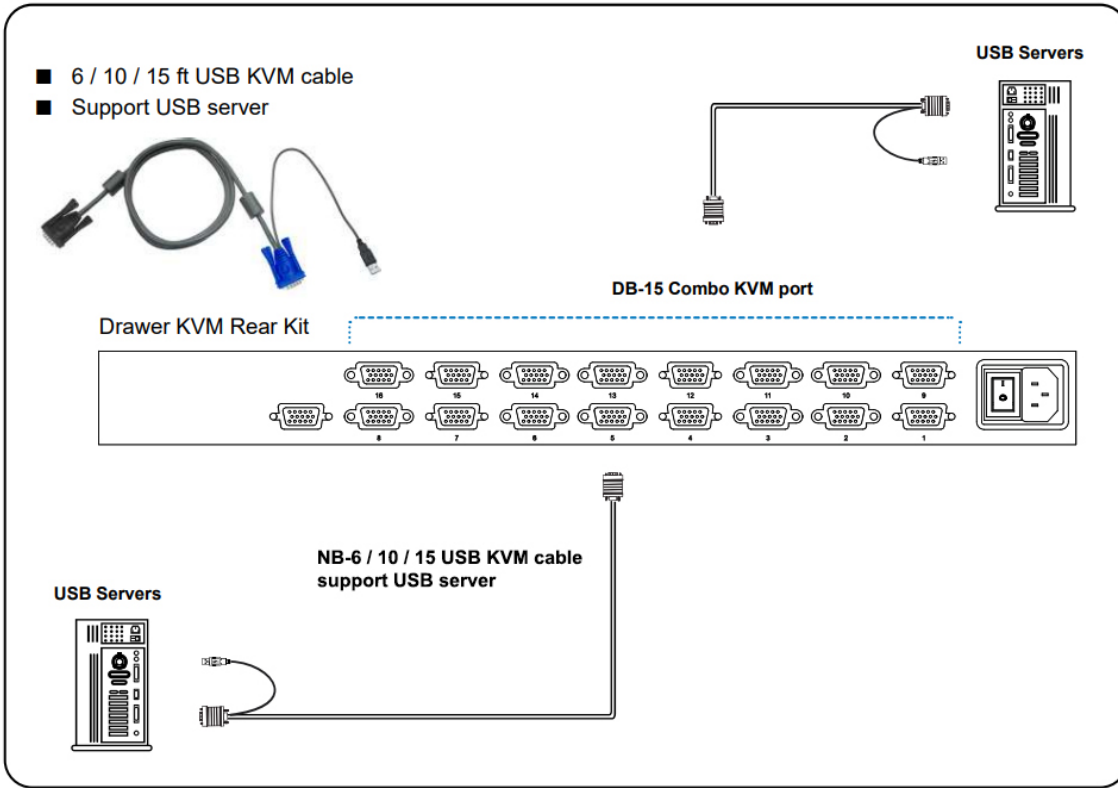


DIMENSION

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.


Front View

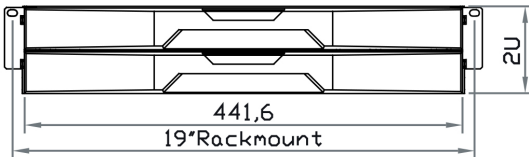


Top View

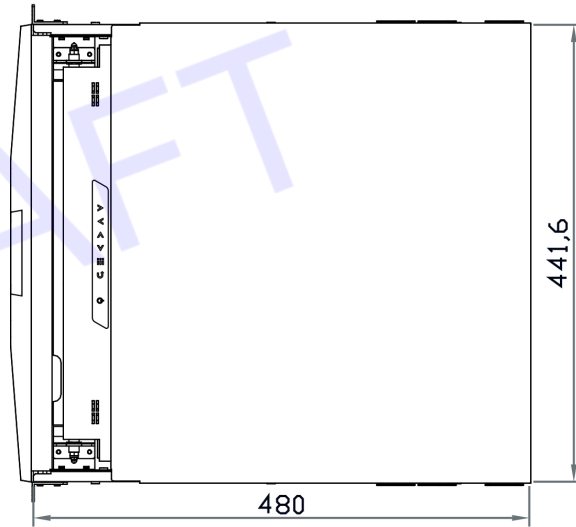

Rear View



Side View

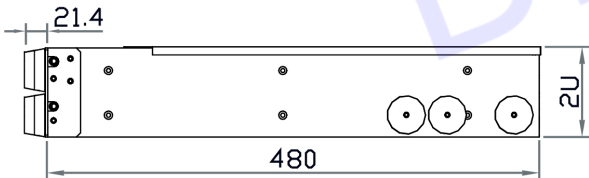

Drawing No.: NVP2417-S801e-03122024-V1