

1U 17" Widescreen Full HD 1920x1080 LCD Console Drawer with HDMI + VGA + DVI-D with 104 key notepad keyboard w/ touch pad (e), 18.9" Deep only and 33lbs. USB Keyboard only. Includes NB-6 console cables 6ft for RGB to USB x1 for Keyboard and touchpad. HDMI Cables 6ft Long x 1
 + Korean Keyboard Layout.
 + Schuko Power Cord.



Model: NW117HDe-H-KR

BENEFITS:

- 1U 17" LCD console drawer
- 1920 x 1080 native resolution / 16.7M colors
- VGA + DVI-D + HDMI video input / USB KB / MS
- 104-key keyboard with either touchpad or trackball
- Short depth design of 460mm
- One Man installation design
- Enhanced aesthetics with new molded front panel and 2-point lock
- 2-year standard warranty (upgradable up to 5 years)

SPECIFICATIONS

Console Port	
Video input	VGA + DVI-D + HDMI
KB / MS	USB interface
VGA console 6ft cable : NB-6A or	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2
DVI-D console 6ft cable : CV-6A	Drawer end : DVI-D + USB type A x 2 Server end : DVI-D + USB type A x 2

LCD Panel	
Panel size (diagonal)	17.3"
Native resolution	1920 x 1080
Brightness (cd/m ²)	300
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	85/85/85/85
Response time (ms)	25
Dot pitch (mm)	0.1989
Display area (mm)	381.888H x 214.812V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	15,000

Physical		
Product (WxDxH)	Single console	442 x 480 x 44 mm 17.4 x 18.9 x 1.73 inch
	Console w/ KVM	442 x 580 x 44 mm 17.4 x 22.8 x 1.73 inch
Packing (WxDxH)	Single console /	590 x 808 x 140 mm
	Console w/ KVM	23.2 x 31.8 x 5.5 inch
Net weight	Single console	10.8 kg / 23.8 lb
	Console w/ KVM	11.6 kg / 25.5 lb
Gross weight	Single console	15.8 kg / 34.8 lb
	Console w/ KVM	17.5 kg / 38.5 lb

Mounting Distance	
Single console drawer	470 ~ 700 mm 18.5 ~ 27.6 inch
Console w/ KVM drawer	470 ~ 800 mm 18.5 ~ 31.5 inch

OPTIONS:

- HDMI 1.4 + Audio input & output
 - HDMI 1.4 video input
 - DP 1.0 video input *
 - 3G / HD / SD-SDI Broadcast-grade input
 - S-Video + Composite
 - 2-post rack mounting brackets
 - DC power : 12V / 24V / 48V / 125V
 - SUN Micro keyboard options
 - Touchscreen: Projected Capacitive 10-pt / Resistive 1-pt
- * No DVI-D after integration of DP 1.0 video input

Video Option		
Digital	HDMI	HDMI 1.4 / HDCP 1.4
	Display port	DP 1.0 / HDCP 1.3
Analog	S-Video (4-pin)	NTSC & PAL
	Composite (BNC)	NTSC & PAL

Audio Option		
Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 14W / Max. 45W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil



Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC, CE & CCC
Safety	c UL us, CE / LVD, UKCA & CCC
Environment	RoHS3 & REACH / WEEE

*Specifications subject to change without notice, not responsible for typographical errors.

STANDARD KEYBOARD



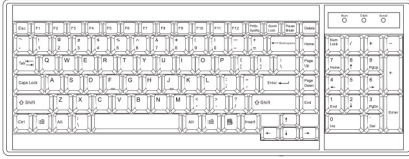






Ge G keyboard with touchpad



Gb G keyboard with trackball



Supporting layouts

America						
	U.S.					
EMEA						
	U.K.	Germany	France	Russia	Spain	Italy
Asia						
	Japan	Korea				

KEYBOARD OPTIONS


* US layout only


Se S keyboard with touchpad

Sb S keyboard with trackball



STRUCTURE DIAGRAM

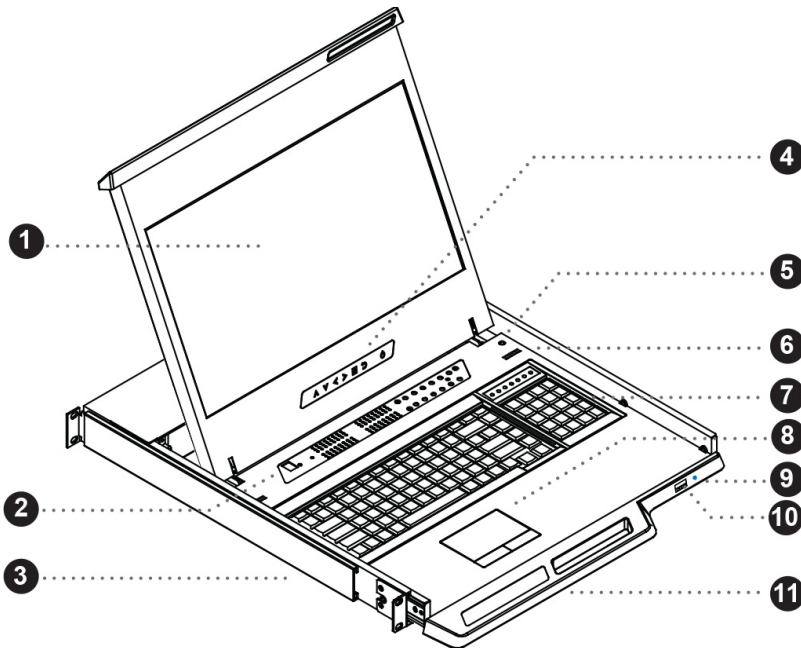


- ① LCD interchangeable module kit
- ② Membrane switch (KVM option)
- ③ Installation Slides
- ④ LCD membrane 
- ⑤ Micro switch for screen auto power off
- ⑥ Audio speaker (for SDI or HDMI option)
- ⑦ Keyboard interchangeable module kit
- ⑧ Mouse interchangeable module kit
- ⑨ Blue Power LED
- ⑩ Front USB port for device access (USB Hub KVM only)
- ⑪ Molded front handle


DIMENSION

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.



Front View

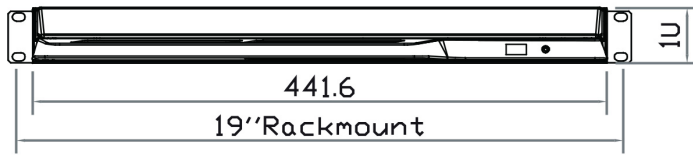

Top View

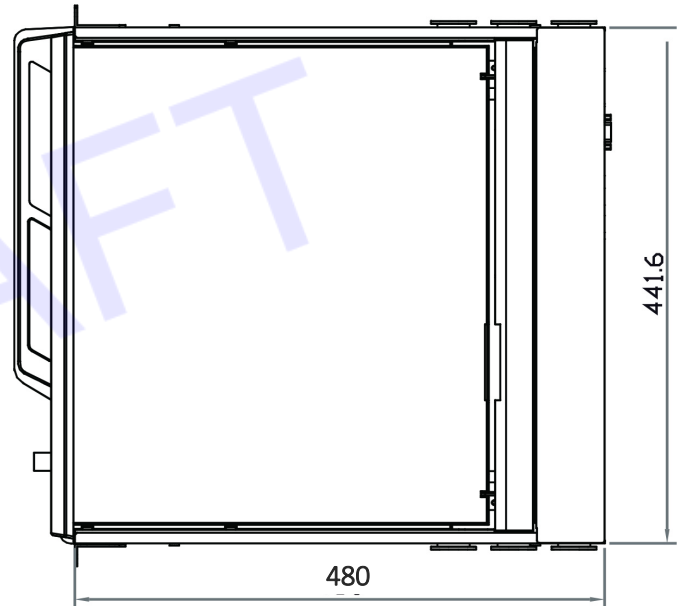

Side View

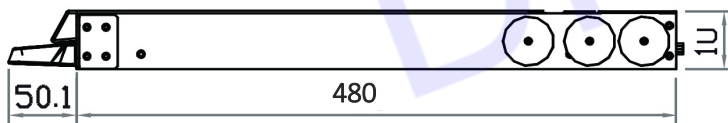

Model: NB-6A

Drawing No.: NW117HDe-H-KR-07192023-V1