

1U Sun Compatible Rackmount 19" LCD Keyboard Drawer 8-port USB KVM, local console(DB-15 connection) 1280x1024 Included / 8 pcs NB-6 KVM (VGA/USB KVM) cable, SUN-compatible keyboard mini trackball 24.4" Deep

MODEL: SNX1198b



BENEFITS:

- 1U 19" LED-backlit LCD console drawer
- Resolution: 1152 x 900 SUN Micro / 16.7M colors
- Keyboard: 104-key USB, with trackball
- Designed for easy One-Man installation
- Sleek Aesthetics: Molded front handle, two-point lock
- Warranty: Standard 2-year (upgradeable to 5 years)

SPECIFICATIONS

LCD Panel	
Panel size (diagonal)	19"
Resolution Direct	1152 x 900
Resolution Native	1280 x 1024
Brightness (cd/m ²)	250
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	85/85/80/80
Response time (ms)	5
Dot pitch (mm)	0.294
Display area (mm)	376.32H x 270.33V
Surface treatment	Haze 25%, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 22W / Max. 55W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil



Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE


**Specifications subject to change without notice, not responsible for typographical errors.*

STANDARD KEYBOARD

Se S keyboard with touchpad

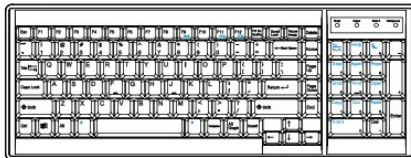

Sb S keyboard with trackball

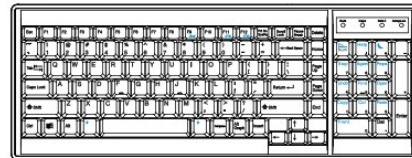


Supporting layouts


America 
U.S.

KVM Rear Kit

back



KVM PORT CONNECTION

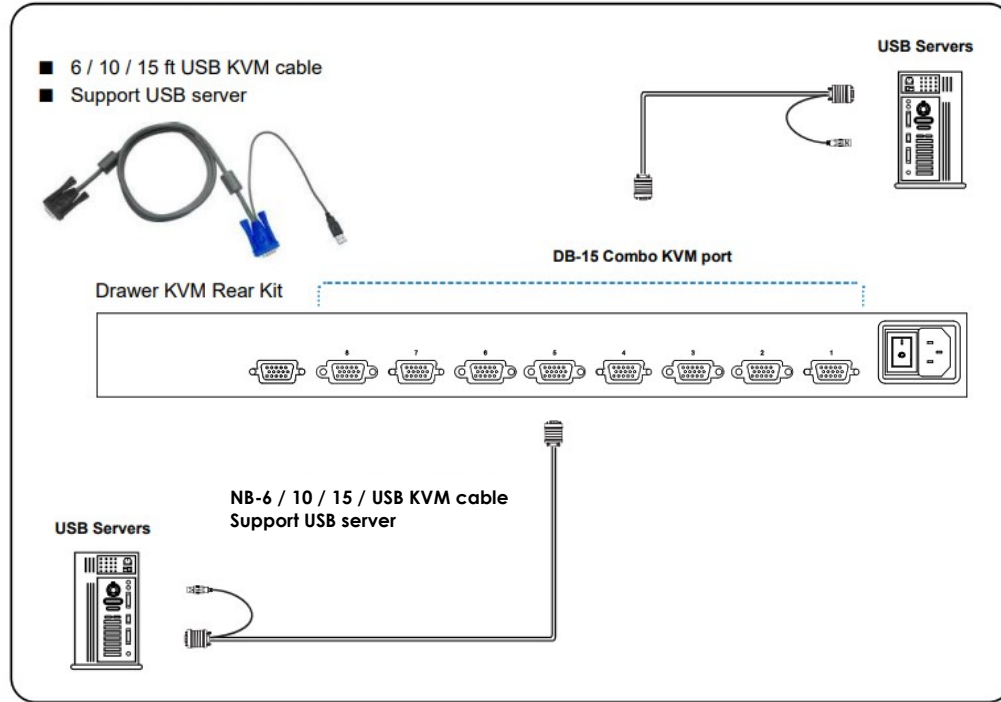

KVM SPECIFICATIONS

KVM Port		
Number of ports :	8	
Connector :	DB-15 combo connector	
Connectivity :	USB 2-in-1 KVM cable, up to 6, 10 & 15 feet	
Local Console :	Nil for LCD console drawer version	
Management		
Multilingual OSD :	English, France, German, Spanish, Italian, Russian, Simplified Chinese, Japanese	
Hotkey combination :	Scroll-lock, Cap-lock, Num-lock, Alt, Ctrl & Win	
Security :	Password enable & disable, up to 8 users profile for port access	
PC Selection :	Front button, OSD menu & hotkey	
Expansion :	Up to 128 servers by 8-level cascade	
Compatibility		
Hardware :	HP / IBM / Dell PC, Server and Blade Server SUN / Mac	
OS Support :	Windows / Linux / Unix / Mac OS	
Power		
Input :	Auto sensing 100 to 240VAC, 50 / 60 Hz	
Option DC :	12V / 24V / 48V / 125V DC input	
Consumption :	Max. 11W	
Compliance		
EMC :	FCC & CE	
Safety :	CE / LVD & UKCA	
Environment :	RoHS3 & REACH / WEEE	
Environmental		
	Operating	Storage / Non-operating
Temperature :	0 to 55°C degree	-20 to 60°C degree
Humidity :	10~90%, non-condensing	5~90%, non-condensing
Altitude :	16,000 ft	40,000 ft
Shock :	-	10G acceleration (11ms duration)
Vibration :	-	10~300Hz 0.5G RMS random vibration