

TEST REPORT

Report No.: HC20135/2010

Page: 1 of 7

Date: April 20, 2010

iTech Company LLC
41758 Christy Street,
Fremont CA 94538 USA

The following merchandise was submitted and identified by the vendor as:

Product Description: 20.1 Multimedia LCD Monitor
Style/ Item No.: WMRM920-PIP/ No. 1
Quantity: Total 1 set
Testing Period: Apr. 16, 2010

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Required: (According to client's test specification, please see following sheets in detail.)

1. Transit Drop Test

Test Results : -PLEASE SEE ATTACHED SHEETS-



Terence Hsieh
Manager - Operation

TEST REPORT

Report No.: HC20135/2010

Page: 2 of 7

1. Transit Drop Test:

Test Equipment:

Name	Brand	Model	Serial No.
Transit Drop Tester	King Design	KD-128A	WR112197097

Lab Environmental Conditions:

Ambient temperature: 25±3°C

Relative humidity: 55±20%RH

Test Method/ Specification:

Test Method: Reference to MIL-STD-810G Method 516.6 Testing Procedures, Procedure IV, Table 516.6-VI, Transit Drop Test

Sample condition: Packaged

Specimen size: L: 75.0 cm W: 20.0 cm H: 55.0 cm

Weight: 14.98 kgw

Drop height: 122 cm

Drop sequence: 8 corners, 12 edges and 6 faces (as shown in photo 7 ~ 32)

Test surface: Steel plate of 1cm thickness

- Sample condition: Packaged
- Examine the appearance of specimen(s) by visual check and perform functional check after this test.
- Functional check: Connect the specimen with rated power then examine whether the display function of specimen could be work normally or not.
- The package product is to be dropped 8 corners, 12 edges and 6 faces, from the appropriate height designate in the table of test condition.

8 corners:	(1) 1-2-5 (photo 7), (5) 2-3-5 (photo 11),	(2) 1-2-6 (photo 8), (6) 2-3-6 (photo 12),	(3) 1-4-6 (photo 9), (7) 3-4-6 (photo 13),	(4) 1-4-5 (photo 10), (8) 3-4-5 (photo 14)
12 edges:	(1) 2-5 (photo 15), (5) 1-2 (photo 19), (9) 1-5 (photo 23),	(2) 2-6 (photo 16), (6) 2-3 (photo 20), (10) 1-6 (photo 24),	(3) 4-6 (photo 17), (7) 3-4 (photo 21), (11) 3-6 (photo 25),	(4) 4-5 (photo 18), (8) 1-4 (photo 22), (12) 3-5 (photo 26)
6 faces:	(1) 2 (photo 27), (5) 3 (photo 31),	(2) 4 (photo 28), (6) 1 (photo 32)	(3) 5 (photo 29),	(4) 6 (photo 30),

Specimen:

Style/ Item No. : WMRM920-PIP/ No. 1

Quantity : total 1 set


Test Result:

<div style="text-align: center;">Check Item</div> <div style="text-align: left;">Style/Item No.</div>	<div style="text-align: center;">Appearance check (Visual check)</div>	<div style="text-align: center;">Functional Check & Performance Check</div>
<div style="text-align: center;">WMRM920-PIP/ No. 1</div>	<div style="text-align: center;">No visible damage</div>	<div style="text-align: center;">Normal</div>


Test Photos:

	
<p>1. Appearance of specimen (WMRM920-PIP)</p>	<p>2. Appearance of specimen (WMRM920-PIP)</p>
	
<p>3. Appearance of specimen (WMRM920-PIP)</p>	<p>4. Appearance of specimen (WMRM920-PIP)</p>
	
<p>5. Appearance of specimen (WMRM920-PIP)</p>	<p>6. Appearance of specimen (WMRM920-PIP)</p>

Test Photos--Continued:

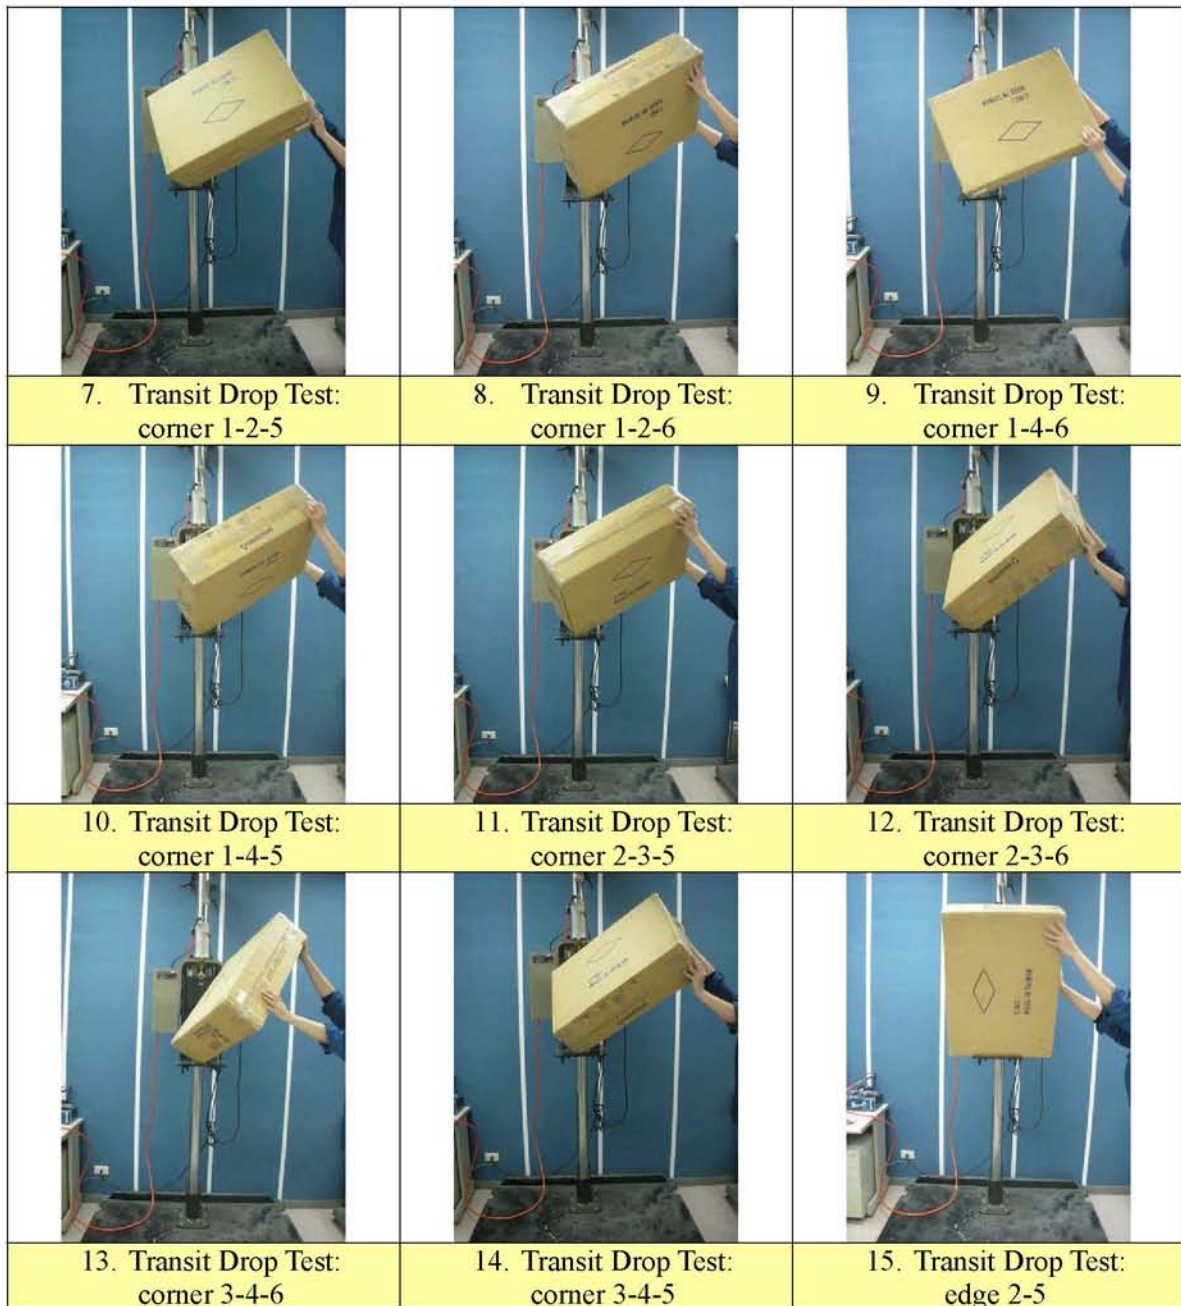

Test Photos--Continued:

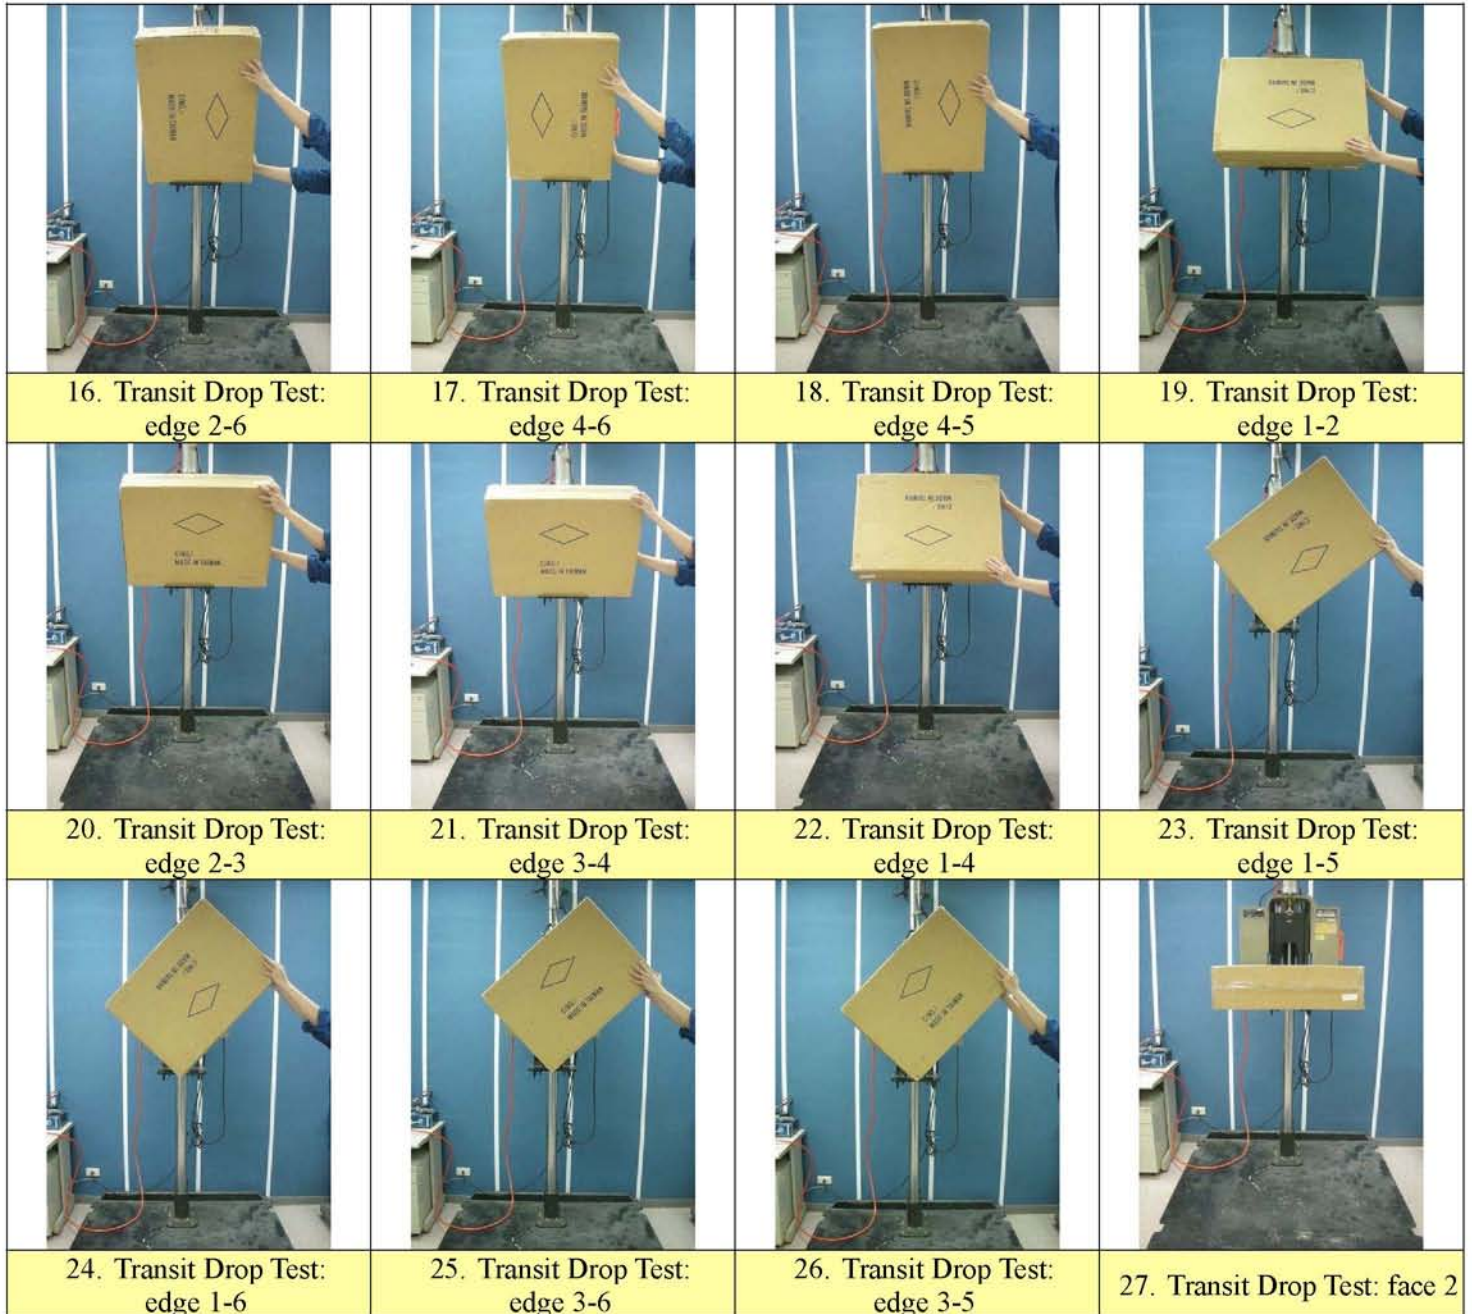


TEST REPORT

Reliability Laboratory

Report No.: HC20135/2010

Page: 7 of 7

Test Photos--Continued:

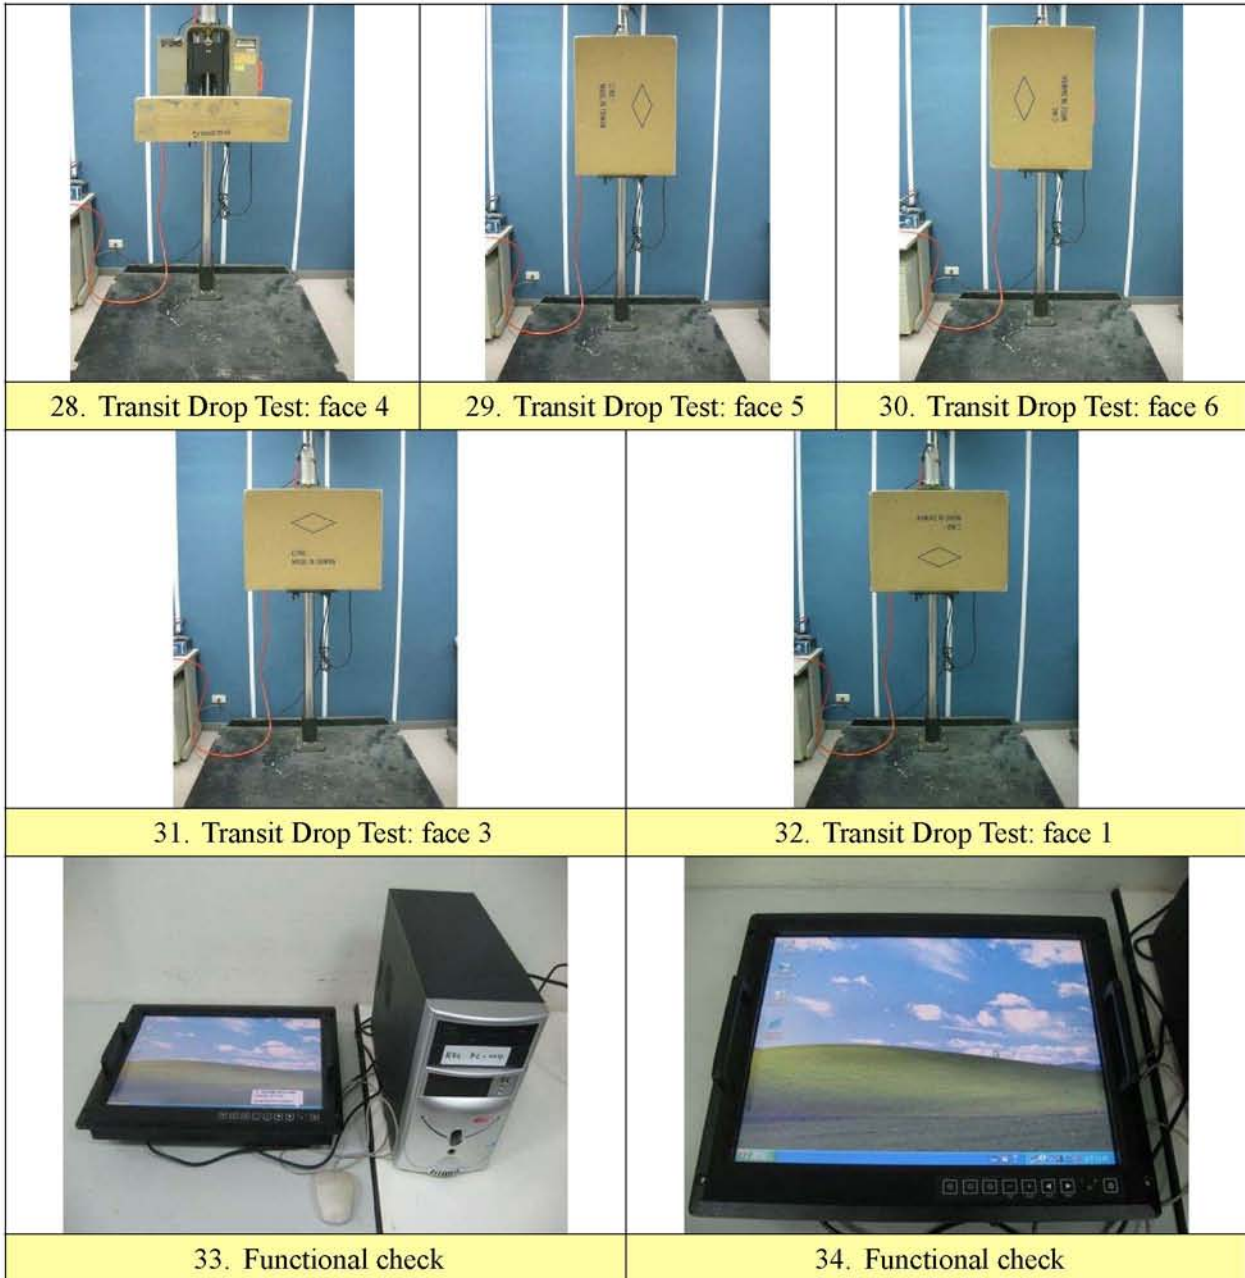

— — — The End of Test Report — — —