

# RUGGEDIZED LCD DISPLAY

Front IP65 Wide 21.5" Rugged Dust/Water Resistant Protection  
1920x1080, 250nits Projected Capacitive Multi Touch Screen  
Operating Temperature: 0~50C, Shock MIL-STD-810G Method 516.6 Vibration MIL-STD-810G Method 514.6, 1 x VGA, 12V input with 100~240V AC to DC Adapter Power Cord  
1 x USB for Touch Screen

## MODEL: WRDW2200-TFP



### FEATURES:

- 21.5" 1920 x 1080 Resolution
- VGA input and HDMI input
- Projected Capacitive Multi-Touch
- Front IP65 for protection against water and dust


### SPECIFICATIONS:

<b>Display</b>	
Touch / Glass	Projected Capacitive Multi Touch Screen
Resolution	1920x1080
Size	21.5 inches
Contrast Ratio	3000:1
Panel Brightness	250 nits
Display Color	16.7M Colors
View Angles	89,89,89,89
<b>Environment</b>	
Operating Humidity	10% to 90% (NonCondensing)
Operating Temperature	0°C ~ 50°C
Storage Temperature	20°C ~ 60°C
Shock	MIL-STD-810G Method 516.6
Vibration	MIL-STD-810G Method 514.6
IP rating	Front IP65
<b>Certification</b>	
Certification	CE, FCC
<b>IO Ports</b>	
USB Port	1 x USB for Touch Screen
Video	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
<b>Mechanical</b>	
Dimension	530.2 x 321.7 x 54.9 mm
Enclosure	Plastic Bezel & Metal back cover
Mounting	VESA Mount/ Panel Mount
Cooling System	Fanless Design
<b>Accessory</b>	
Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws (Varies by product)
Optional Accessory	Remote Controller (Optional, Varies by product)
<b>Power</b>	
Power Rating	12V DC Input
<b>Control</b>	
Button	5 Keys: , + , Power , Esc , Enter

*\*Specifications subject to change without notice, not responsible for typographical errors.*

## MECHANICAL DRAWING:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

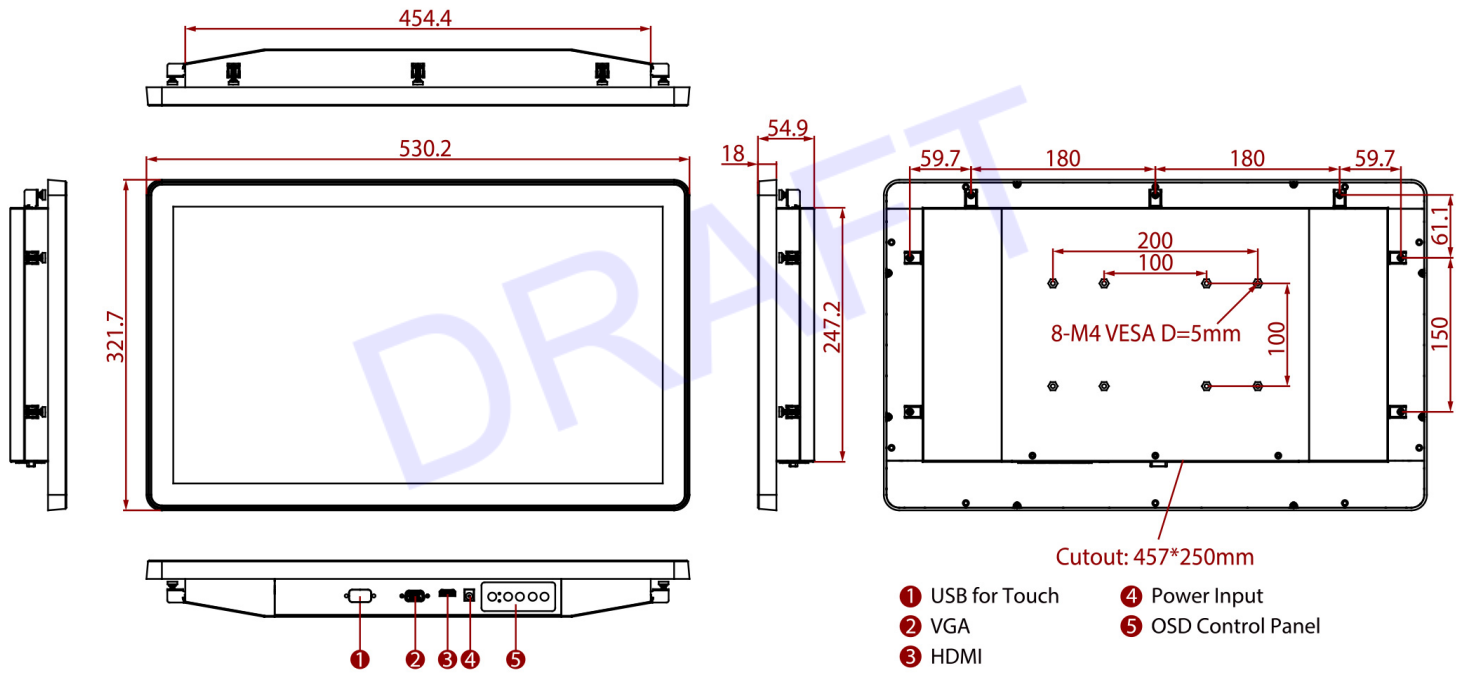

Drawing No.: WRDW2200-TFP-04052022-V1