

SUNLIGHT READABLE CHASSIS MOUNT LCD



Industrial Chassis/Wall Mount Metal Housing
24" LCD Monitor, 1920x1080, 1000nits,
VGA+DP+HDMI, Side OSD

Model: ECHW2400HD-HB-DP

FEATURES

- Modular construction for more flexibility in terms of product configuration as well easy maintenance
- Available with auto-brightness sensor offers application in day and night
- Optional build-in touch screen functionality for an interactive application
- Complete custom design/solution for OEM customers
- VGA connector but also available with optional AV, SV, and AV-Looping
- Auto Power On: Monitor is always "ON" when connect to power.
- Auto Video Signal On: Monitor (Backlight) will turn off when no video signal, but it will Auto turn back on.

SPECIFICATIONS:

Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 24" viewable diagonal area	
	Active Area / Pixel Pitch	531.36(H) x 298.89(V) mm / 0.2768(H) x 0.2768(V) mm	
	Native Resolution / Colors	1920(H) x 1080(V) / 16.7M	
	Brightness / Contrast	1000 cd/m2 (typ) / 1000 : 1	
	Response Time	≤ 5 ms	
	Viewing Angle (typical)	H.170° (- 85° ~ + 85°) , V. 160° (- 80° ~ + 80°)	
	Light Source	LED backlight, Long life, 35,000 hrs (typ)	
Input Sources	PC System	Signal	Analog RGB (0.7/1.0 V _{p-p} , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F _h : 30 - 82Khz , F _v : 50 -75Hz
	Audio System	2W speaker x 2	
Input Terminals	1 x VGA, 1 x HDMI, 1 x DP		
Convenient Features	Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)		
	OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing)		
Power	Internal power supply with universal / Auto-Sensing, AC90 to 260V, 50/60 Hz		
Power Consumption	Operation / Power Saving	61.25 watt , < 1 watt (Support DPMS)	
Operating Condition	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F), 10% ~ 90% (no condensation)	
Storage Condition	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation)	
Certification	FCC , CE		
Dimensions	Physical	Please refer to Drawing	
	Carton	W x H x D = TBD	
Weight	N.W. / G.W.	12 Kgs / 13.5 Kgs	
Container Loaded	20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)	

OPTIONS

Touch: Resistive, Capacitive, SAW, Infrared, and Protected glass

Video/TV: SV + AV, SV + AV + AV_Looping, SV + AV + TV


Enhanced Panel: Panel with LED backlight, High brightness panel, Wide Temperature, Sunlight Readable

Others optional features: Digital Signage (Standalone), Networking Digital Signage, Motion Sensor, Light Sensor, Auto-Dimming



MECHANICAL DRAWINGS

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

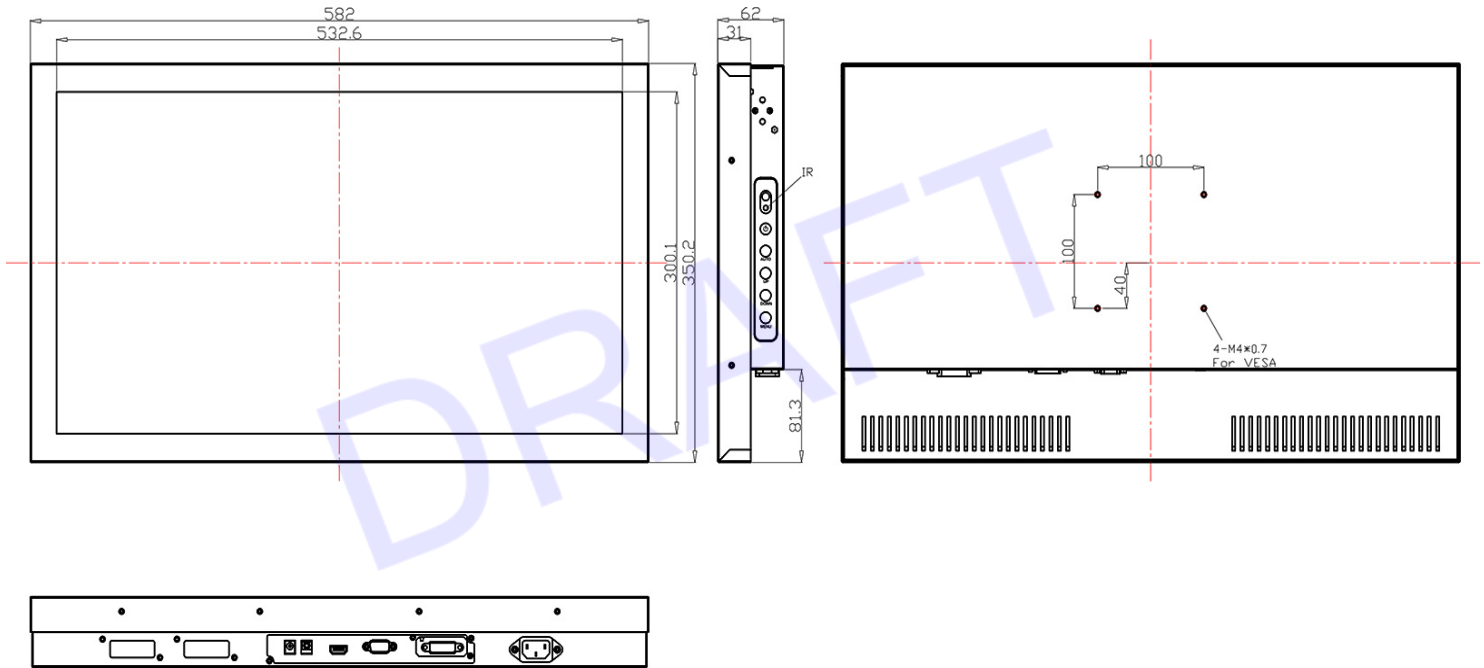

Drawing No.: ECHW2400HD-HB-DP-07032023-V1