



Open Frame, 15" LCD Monitor, 1024x768, LED-250 nits
VGA, AC-IN w/Built-in PWR

Model: EDD1500NW

FEATURES:

- Entire disk looping playback (In order to content's alphabetical)
- Video formats: 3gp / flv / mov / webm / AVI / DIVX & MPEG 1/2/4"
- Image formats: jpg, png, bmp, tiff
- Audio formats: MP3, WMA, WAV
- Performance: 1080P (one of multi-zone) / 720P / 480P
- Support scrolling text
- Sliding Photo

SPECIFICATIONS:

Cell Type	TFT LCD
Glass Surface	Black Anti-Glare, low reflection coating
Aspect Ratio	4 : 3
Size	15" viewable diagonal area
Active Area	304.13(H) x 228.10(V) mm
Pixel Pitch	0.297(H) x 0.297(V) mm
Native Resolution	1024(H) x 768(V)
Colors	16.2 M
Brightness	250
Contrast	700 : 1
Response Time	≤ 35 ms
Viewing Angle (typical)	H. 140°(- 70°~ + 70°) , V. 120°(- 60°~ + 60°)
Light Source	LED backlight, Long life, 35,000 hrs (typ)

INPUT SOURCES

PC System	Signal	Analog RGB (0.7/1.0 V, 75 ohms)
	Sync	Separate Sync, Composite Sync, Sync On Green
Audio System	Frequency	F: 30 - 82Khz , F: 50 -75Hz
	2W speaker	x 2


**Specifications subject to change without notice, not responsible for typographical errors.*

CERTIFICATION	
FCC , CE	
INPUT TERMINALS	
1 x VGA (15 Pin Female D-Sub) , 1 x PC Audio (Stereo Headphone Jack) , 1 x DC Power Plug	
CONVENIENT FEATURES	
Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B) , OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing)	
POWER	
Internal power supply with universal / Auto-Sensing, AC90 to 260V, 50/60 Hz	
POWER CONSUMPTION	
Operation / Power Saving	20 watt , < 2 watt (Support DPMS)
OPERATING CONDITION	
Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)
STORAGE CONDITION	
Temperature / Humidity	-20°C ~ 60°C (-4°F ~ 140°F) , 10% ~ 90% (no condensation)
DIMENSIONS	
Physical	<nil>
Carton	W x H x D = TBD
WEIGHT	
N.W. / G.W.	4 Kgs/5 Kgs
CONTAINER LOADED	
20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)

TOUCH	VIDEO INPUT	ENHANCED PANEL	POWER	OTHERS
Resistive Touch	AV-IN	High Brightness Panel	24V DC-IN	Motion Sensor
Projected Capacitive Touch	AV Looping	Sunlight Readable	9~36V DC-IN	Light Sensor
Infrared Touch	HDMI / DP	Wide Viewing Angle	48V 72V DC-IN	VR-knob Dimming
Protected Glass	HD-SDI	Wide Temperature	90V 125V DC-IN	RS232 Remote On/Off
Optical Bonding		UV Film	110V 220V DC-IN	Military Connector: MIL 38999
		Anti-Vandal		Metal Connector: M12 / M16
				Stainless 316 Enclosure

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

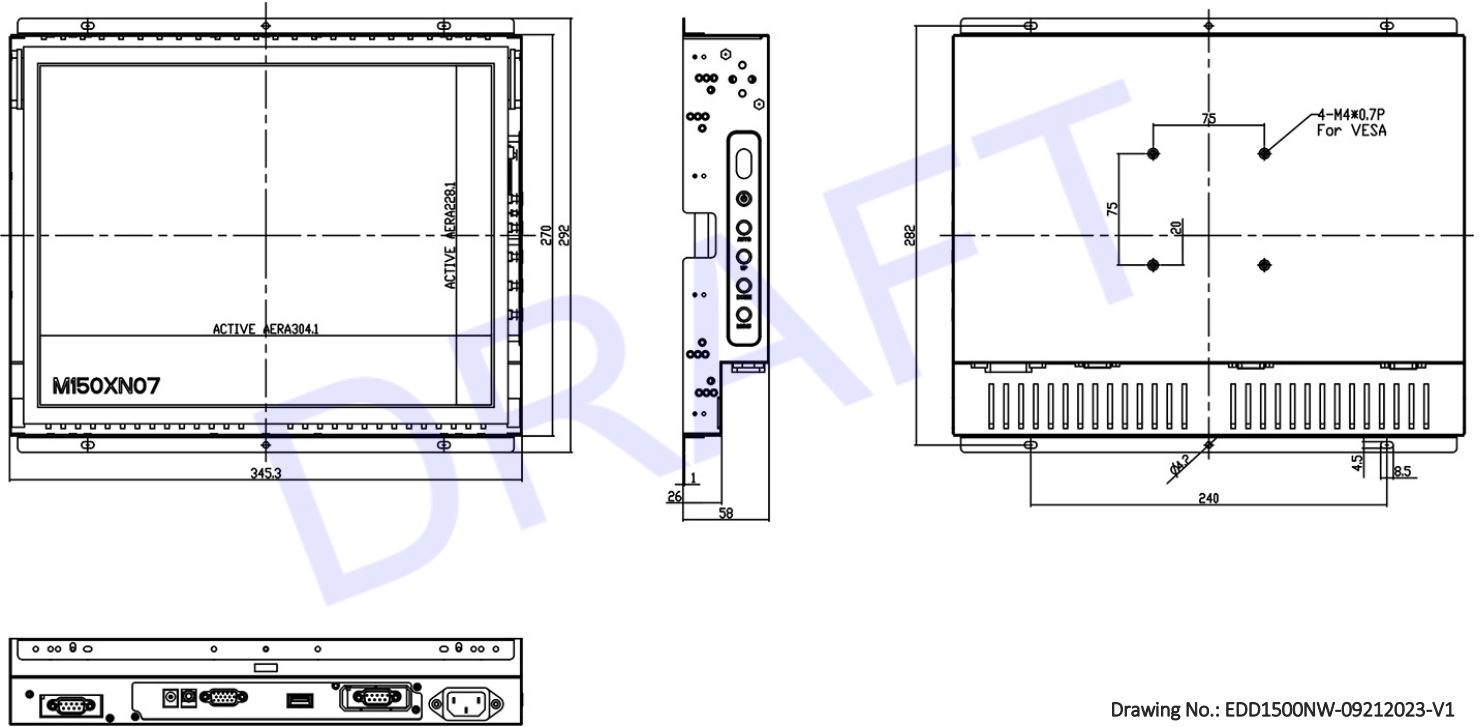

Drawing No.: EDD1500NW-09212023-V1